

PASSENGER • LIGHT TRUCK • HD TRUCK • OTR • MINING

TBE200

TIRE SERVICE

LASER MEASUREMENT & TIRE TREAD DEPTH ANALYSIS ON TOOL















AIR OPERATED TIRE SPREADER

- For passenger/RV/light truck tires
- Wide platform gives stable work surface
- Adjustable light

AUTOMATIC TRUCK TIRE SPREADER

- Air lift allows operator to lift without lifting the tire/wheel
- · Heavy gauge steel construction
- Work light included
- · Air regulator/lubricator included

FLOOR MOUNT ADJUSTABLE TIRE SPREADER

- Provides easy access for repairing passenger and light truck tires
- The adjustable tire spreader can accommodate all tires from garden service through light truck
- The Tire Spreader has a foot-control



ASCOT NO.

MFG. NO.

DESCRIPTION

Air Operated Tire Spreader

ASCOT NO. 603-00825

▲WARNING: For more information go to www.P65Warnings.ca.gov.

MFG. NO. BJ-S825

DESCRIPTION

Automatic Truck Tire Spreader

ASCOT NO. 604-01275

MFG. NO. BJ-275B

Floor Mount Adjustable Tire Spreader

DESCRIPTION





ASCOT NO.	MFG. NO.	DESCRIPTION	MIN. HGT.	MAX HGT.	HYD. LIFT RANGE	EXTEN. SCREW	CHASSIS SIZE	SADDLE Size	HANDLE LENGTH	SHIP WT. (LBS)
301-20220	AS2022	20-Ton Air/Hydraulic Bottle Jack	10-1/8"	19-7/8"	6-1/2"	3-1/8"	N/A	N/A	9-3/8"	35.1
301-20221	AS2022S	20-Ton Short Air/Hydraulic Bottle Jack	7"	12-5/8"	3-3/8"	2-3/9"	N/A	N/A	9-3/8"	30.6
302-19150	AS1915	22-Ton Air/Hydraulic Truck Jack	10-1/2"	21-1/8"	6-1/8"	4-1/2"	N/A	N/A	45-1/4"	101.9
302-05601	AS5601	2-Ton Low Profile Floor Jack	2-3/4"	24"	21-1/4"	N/A	31.9" x 14"	3-7/8"	47-7/8"	102.3
302-05602	AS5602	2-1/2-Ton Low Profile Floor Jack	3-1/8"	19-3/4"	16-5/8"	N/A	26.3" x 13.5"	4-3/8"	47-7/8"	73.7
302-05613	AS5613	3-Ton Floor Jack	3-3/8"	24-1/4"	20-7/8"	N/A	31.4" x 14.4"	3-7/8"	47-7/8"	105.4
302-05605	AS5605	3-1/2-Ton Floor Jack	3-3/4"	20-1/2"	16-3/4"	N/A	27.2" x 14.25"	4-1/4"	47-7/8"	100
302-05614	AS5614	4-Ton Floor Jack	4-3/8"	20-1/4"	16"	N/A	27.7" x 14.4"	4-1/4"	47-7/8"	102.5






⚠WARNING: For more information go to www.P65Warnings.ca.gov.





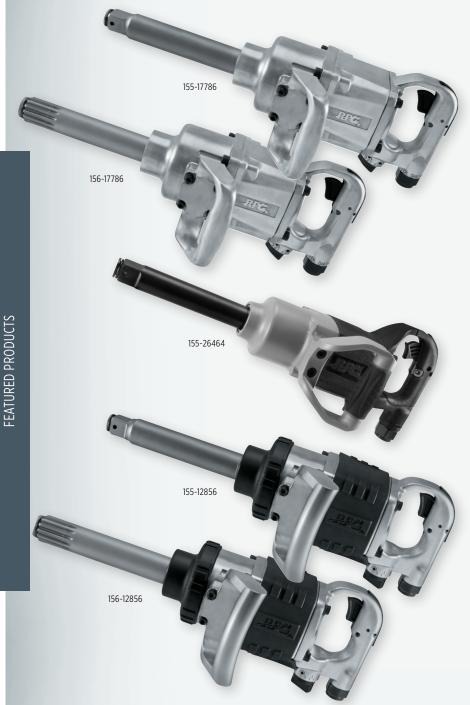

RPG 1" DRIVE & #5 SPLINE SUPER DUTY AIR IMPACT WRENCH

- 6" extended anvil
- Steel end plates
- WORKING TORQUE RANGE: 1,600-1,800 ft./lb.
- FREE SPEED: 4.500 RPM
- MAXIMUM TORQUE: 1,800 ft./lb.

RPG 1" DRIVE MINI PLUS AIR IMPACT WRENCH

- 6" extended anvil
- 3-position power setting
- Rubber-coated side handle for added comfort
- Powered by the twin hammer clutch
- FREE SPEED: 5,000 RPM
- MAXIMUM TORQUE: 2,000 ft./lb.

RPG 1" & #5 SPLINE DRIVE SUPER **DUTY IMPACT WRENCH**

- 6" extended anvil
- 3-position forward and reverse
- High efficiency 6-vane motor
- Swoop-back side handle for maneuverability and balance
- · Pinless clutch mechanism
- WORKING TORQUE RANGE: 1,800-2,000 ft./lb.
- FREE SPEED: 5,000 RPM
- MAXIMUM TORQUE: 2,000 ft./lb.

ASCOT NO.	MFG. NO.	SQUARE DRIVE	FREE SPEED (RPM)	MAX TORQUE (FT./LB.)	AIR PRESSURE (PSI)	AIR CON. AVG (CFM)	AIR INLET (NPT)	HOSE SIZE	LENGTH	WEIGHT (LB.)
155-12856	A2856	1"	5,000	2,000	_	12	1/2"	3/4"	20.5"	27.6
155-17786	A778-6	1"	4,500	1,800	90	8.4	1/2"	3/4"	20.3"	26.59
155-26464	A26464	1"	5,000	1,800	90	9	1/2"	3/4"	19.2"	17.86
156-12856	A2856SP	#5 Spline	5,000	2,000	_	12	1/2"	3/4"	20.5"	27.6
156-17786	A778SP-6	#5 Spline	4,500	1,800	90	8.4	1/2"	3/4"	20.3"	26.59



RPG 1/2" DRIVE SUPER DUTY AIR IMPACT WRENCH

- 2" extended anvil
- FREE SPEED: 8000 RPM
- MAXIMUM TORQUE: 600 ft./lb.
- Proven design and the most popular configuration in the tire service industry
- Powered by the durable and high performing twin hammer mechanism
- Handle exhaust

RPG 1/2" DRIVE COMPOSITE IMPACT WRENCH W/ EXTENDED ANVIL

- Convenient one-hand operated forward/reverse push button
- Four-setting torque adjustment switch
- Compact with a total length of only 7.2"
- Twin hammer mechanism provides smooth balance
- Feather trigger for precise speed control
- Energy efficient motor for maximum performance & long life
- Swivel air inlet prevents hose from twisting



ASCOT NO.	MFG. NO.	SQUARE DRIVE	FREE SPEED (RPM)	MAX TORQUE (FT./LB.)	AIR PRESSURE (PSI)	AIR CON. AVG (CFM)	AIR INLET (NPT)	HOSE SIZE	LENGTH	WEIGHT (LB.)
153-12260	A2131-2COMP	1/2"	7,500	685	90	5	1/4"	3/8"	7.2"	4.5
153-23120	A2312	1/2"	8,000	600	90	4	1/4"	3/8"	8-1/8"	5.6
153-23121	SS-A2312	1/2"	8,000	600	90	4	1/4"	3/8"	6.1"	5.9





HEAVY DUTY TIRE REPAIR CABINET

Features sliding storage drawers with rollers.

- SIZE: 19.6" x 10" x 26"
- 2 shelves inside (3 storage levels)
- · 2 tool hook sets on two inside doors
- 2 sliding storage drawers with rollers
- Switch-to-open handle
- · Optional shelf available
- WEIGHT: 36 lbs.

ASCOT NO.	MFG. NO.	DESCRIPTION
719-12001	TBG-WC12001	Heavy Duty Tire Repair Cabinet
719-12011	TBG-WC12001-01	Optional Shelf for Tire Repair Cabine



18-DRAWER METAL STORAGE CABINET

- CABINET SIZE: 33-3/4" (W) x 11-3/4" (D) x 10-3/4" (H)
- DRAWER SIZE: 4-7/8" (W) x 11-1/4" (D) x 2-3/4" (H)
- Modular drawer design for efficiency and organization
- Heavy-duty, welded steel construction provides strength and stability
- Drawers feature stoppers to prevent accidental pulling or spilling
- Full-width handles and easy glide runners
- · Shipped fully assembled and ready to use
- WEIGHT: 45 lbs.

ASCOT NO.	MFG. NO.	DESCRIPTION	
	1		

719-00018 18D 18-Drawer Metal Storage Cabinet



32-BIN METAL STORAGE CABINET

- CABINET SIZE: 33-3/4" (W) x 8-1/2" (D) x 19-1/4" (H)
- DRAWER SIZE: 4" (W) x 8-3/8" (D) x 4-1/2" (H)
- Keeps your tools and accessories organized and accessible
- Heavy-duty, welded steel construction provides strength and stability
- Hemmed bin fronts for retaining parts
- Mounting holes located in the top and bottom
- Shipped fully assembled and ready to use
- WEIGHT: 37 lbs.

ASCOT NO. MFG. NO. DESCRIPTION

719-00032 32B 32-Bin Metal Storage Cabinet





^{*}Actual product appearance may vary

PROFESSIONAL STUD/HUB BRUSH KIT

- Ideal for hub and stud cleaning job with ease QUICK AND EASY: Change brushes in seconds • Includes a ½" drive adapter
- Powered by a cordless drill Replacement brushes available

		VIII VIII					
	PROFESSIONAL STUD/HUB KIT CONTENTS						
(2) 14mm St	tud Brushes	(1) Plastic Tool					
(2) 22mm S	tud Brushes	(1) Adapter					
(2) Passeng	er Hub Brushes	Blow Molded Case					
(2) Truck Hub Brushes							
ASCOT NO.	MFG. NO.	DESCRIPTION					
402-32610	203610-ASC	Stud/Hub Brush Kit					
402-32611	203611-ASC	Plastic Hub/Stud Tool & Adapter					

4-Pack of Replacement 14mm Stud Brushes

4-Pack of Replacement 22mm Stud Brushes

4-Pack of Replacement Truck Hub Brushes



402-32613

WHEEL HUB GRINDER

203613-ASC

203614-ASC

203615-ASC

203616-ASC

402-32613

402-32614

402-32615

402-32616

• Special grinder for cleaning the wheel centering device as well as the attachment area between the wheel and hub • Burnt-in corrosion residues are completely removed in a guick and easy process • Actual cleaning time per hub only takes between 3-25 seconds depending upon residue thickness • Replacement discs sold separately (3 per package)



ASCOT NO.	MFG. NO.	DESCRIPTION
402-43352	433 502/M	Wheel Hub Grinder
402-43351	433 501	Grinder Replacement Discs (3 per package)

INNER RIM CLEANER AND REPLACEMENT DISCS

• Meant for the optimal cleaning of the inner wheel contact surface • Prevents corrosion related distortion of wheel bolt tightening torque • Allows for the complete removal of burnt-in corrosion • Used only on the inside of an aluminum rim • Velcro adhesive makes it easy to change out replacement discs • 75 mm diameter • Replacement discs sold separately (3 per box)



ASCOT NO.	MFG. NO.	DESCRIPTION	
402-43357	433 507	Inner Rim Cleaner	
402-43358	433 508	Replacement Discs (3 per Box)	
		(3 pci box)	

RPG HUB BUDDY TOOL

- IMPACT RATED: No need to change tools
- Complies with best practice R.I.S.T. procedure
- Removes rust, corrosion and other build-up from wheel stud, drums and tire rim • Helps proper torque of lug nuts by removing corrosion
- A must for easy and accurate tire balancing
- INCLUDES: 1 Hub Buddy XL attachment and 1 cleaning disc head • Replacement cleaning discs available in packs of six



ASCOT NO.	MFG. NO.	DESCRIPTION
402-37330	37330	RPG Hub Buddy Tool
402-37335	37335	RPG Hub Buddy Tool Replacement Pads
402-37340	37340	1-1/2" RPG Hub Buddy Tool Replacement Pads



TIRE SERVICE LED WORK LIGHT & REPLACEMENT LAMP HEAD

- LED: 1-piece 3W high power LED
- THREE CONVENIENT SWITCH MODES SO THAT YOU CAN OPERATE AT THE POWER YOU NEED: High - Low - Off
- WORKING TIME: Approx. 3 hours
- CHARGING TIME: Approx. 3 hours
- BRIGHTNESS: Approx. 200LM for High Mode; 80LM for Low Mode
- · Magnet on lamp body and head
- · Charging indicator on lamp head
- Detachable lamp head with quickclip mounting to body
- Smart-clamp design for 9mm-32mm distance
- MULTI-USE: Clamping, magnetic, hand-held
- BATTERY: Customized 3.7V 900mAh rechargeable polymer battery
- INCLUDED: 5V 0.6A (UL) adapter + USB cable



312-05224

ASCOT NO.	MFG. NO.	DESCRIPTION
312-04146	TWL3035	Tire Service LED Light w/ USB Adapter
312-04147	TWL3035H	Replacement Lamp Head for

RECHARGEABLE WATERPROOF WORK LIGHT

• Best in the industry, Ascot Supply Corporation's Rechargeable Waterproof Work Light is the brightest rechargeable work light available with its powerful 66 LED's (460 lumens) • Swivel hook for hanging

· Universal attachment hook can be used as a light stand or attached under a car hood • Rechargeable battery • Replacement 12 V lighter adapter is also available and sold separately

ASCOT NO.	MFG. NO.	DESCRIPTION
312-05224	CED5224A-AS	Rechargeable Waterproof Work Light
312-15224	CED522P3-AS	Replacement AC Adapter
312-25224	CED5224P1-AS	12V Lighter Adapter

HEAD LIGHT WITH RECHARGEABLE BATTERY

 Hands-free, versatile and comfortable with adjustable straps • MATERIAL: Aluminum +ABS+PC • LED: 1-piece high power CREE T6 bulb • BRIGHTNESS: Approx. 500LM for high mode • 4-MODE LED LAMPS: High - Low - Strobe - off • WORKING TIME: Approx. 6 hours on High; Approx. 12 hours on Low • CHARGING TIME: Approx. 5 hours • RECHARGEABLE BATTERIES: 2x 3.7V 1800mAh Li-ion batteries (3600mAh total battery capacity) • Sensor Function • USB cable included

ASCOT NO. MFG. NO. DESCRIPTION

THL2019 | CREE Head Light with Rechargeable Battery 312-03120

COB RECHARGEABLE WORK LIGHT W/ USB CABLE

• 400LM brightness • Dimming Switch

• Features a hook on lamp head and base with magnet for handsfree operation • WORKING TIME: Approx. 2.5 hrs. • CHARGING TIME: Approx. 4 hrs. • 8W COB LED

TWL3007E

ASCOT NO. MFG. NO.

312-03007

DESCRIPTION

COB Rechargeable Work Light w/ USB Cable

312-03007

XLIGHT TIRE SERVICE LED WORK LIGHT

• Designed for hands-free lighting during tire service and other work applications • 14" adjustable springtube for optimum light positioning within tight spaces • 2-stage compact high-power LED light provides 125 & 250 lumen output

· Multiple high-power magnets on the handle and light-head attract easily to most metal surfaces • Lithium-ion rechargeable battery • Compatible with all passenger,

light truck and commercial truck tires

• Compatible with all tire spreaders

ASCOT NO. MFG. NO. 312-14923 14-923

DESCRIPTION XLight Tire Service LED Work Light

LED WORK LAMP ASSEMBLY

• LED worklamp for tire spreaders

· Directional spotlight for increased visability • 8W COB LED will provide 650 Lumens, 750 Lux at 1M • Stays cool to the touch • Heavy duty LED lens • Swivel head • Stays cool to the touch · Adjustable, flexible gooseneck

• Includes mounting bracket

ASCOT NO. MFG. NO. DESCRIPTION 312-08473 TR8473 LED Work Lamp Assembly



312-03120



312-14923



DRIVEN TO OUTPERFORM.



ALSO AVAILABLE

CONTROLLED TORQUE OUTPUT

1,100 FT-LBS NUT-BUSTING TORQUE

FASTER TIRE SERVICE

M18 FUEL" 1/2" Ext. Anvil Controlled Torque Impact Wrench Kit w/ ONE-KEY" 2769-22



POWER TO COMPLETE COMMERCIAL FLAT REPAIR

CONSISTENT FLAT REPAIR

30 REPAIRS
PER CHARGE

M12 FUEL™ Low Speed Tire Buffer Kit 2409-22



TABLE OF CONTENTS



	TIRE & WHEEL SERVICE	. 15
	Tire Lubricants & Sealants	160
7	Markers	
ſ	Tire Branding Inserts	16
	Bead Breakers	170
	Hydraulic Pumps & Rams	17
	Otr Service Tools	180
	Cribbing Sets & Wheel Chocks	18
	Bead Seating Devices	18
	Chloride Pumps	190
	Mount/Demount Tools	19
	Hammers & Wedges	19
	Wrenches & Lug Wrenches	. 20
	Shop Service Tools	. 20
	Tire Inflation Systems	. 20
	Safety Inflation Cages	210
	VALVE HARDWARE	. 21!
	TPMS Tools & Sensors	21
7	TPMS Accessories & Kits	. 22
£	TPMS Tools	
	TPMS Transmitters	. 240
	Aftermarket Accessory Kits	. 24
	Tire Valves	. 24
	Truck & Specialty Valves	. 24
	Valve Caps, Cores & Extensions	. 250
	Special Application Products	. 25
	Large Bore Extensions	. 26
	Valve Hardware Tools	. 26
	Tire Gauges	. 26
	Inflator Gauges	. 27
	SERVICE EQUIPMENT	28
	Tire Changers	
	Tire Changer Accessories	
	Heavy Duty Tire Changers	
	Wheel Balancers.	
	Wheel Balancer Accessories	
	Challenger Lifts	
	_	



Rubber Blocks & Lift Pads......317

TABLE OF CONTENTS



WHEEL BALANCING319	9
Lead Passenger Wheel Weights	0
Zinc Passenger Wheel Weights32	1
Steel Passenger Wheel Weights	2
Plasteel® Passenger Wheel Weights 32	3
Heavy Duty Lead Truck Wheel Weights 32	4
Zinc Truck Wheel Weights 32	5
Lead Adhesive Wheel Weights 32	6
Steel Adhesive Wheel Weights	7
Steel Adhesive Rolls & Accessories 32	9
Wheel Weight Displays & Kits	0
Wheel Weight Tools33	1
Balancing Beads	3



TIRE REPAIR MATERIALS	385
Cements, Sealants & Patches	. 386
Air Buffers & Drills	. 405
Tire Repair Tools & Accessories	407
Tire Spreaders & Repair Stations	. 424
Cabinets & Storage	. 428



RETREADING	429
Rasp Blades & Spacers	430
Retread Accessories.	433
Retread Consumables	43
Tire Appearance	438
Envolonos	



ALIGNMENT	339
Alignment Tool Assortments	340
Camber/Caster Tools	342
Heavy Duty Alignment	348
Automotive Alignment Equipment	. 35



MEASUREMENT CONVERSIONS441



AUTOMOTIVE & FLEET SERVICE	555
Battery Chargers & Testers	355
ubrications & Sealants	356
xhaust Hoses & Tailpipe Adapters	358
Bench Grinders & Shop Vises	359
Pliers & Screwdrivers	.361

NUMERICAL INDEX	 								4	4	6

AUTOMOTIVE & FLEET SERVICE333	
Battery Chargers & Testers	1
Lubrications & Sealants	,
Exhaust Hoses & Tailpipe Adapters 358	,
Bench Grinders & Shop Vises	1
Pliers & Screwdrivers361	
Shop Cleaners & Brushes	
Shop Lights	
Service Stickers	1
Tire Displays & Carts	1
Interior Protection Products	,
Studding Equipment	
Drains & Pumps	
Fluid Exchange	,
Oil Accessories	,
Safety Products	
Wheel Chocks	
Gloves. 383	

Ascot Supply Corporation is not responsible for inadvertent typographical errors or omissions.





TIRE PROFESSIONALS INSIST ONLS





Air Compressors

Inflation Systems

Filters, Regulators & Lubricators

Hose Reels & Accessories

Air Line Couplers & Plugs

Hose Adapters

Clamps

S S S S S S S S

CHAMPION

Advantage Series

The Advantage Series is a fully packaged unit with all of the additional accessories customers need included. Advantage series compressors are typically shipped from the factory in 24 hours or less. Compressors are shipped ready to install and operate. Each new assembled unit comes with a standard three-year standard warranty, with option for a six-year extended warranty with the purchase of an extended warranty kit.

RECIPROCATING AIR COMPRESSOR

- 5-25 HP MAXIMUM PRESSURE: Up to 175 PSIG
- 17.0 to 203.6 ACFM at 175 PSIG
- Two Stage, Splash Lubricated
- Tank-Mounted, Simplex and Duplex Models • Vertical or Horizontal Configurations
- Package comes standard with up to six pre-installed options
- Factory filled with ChampLub lubricant • Control panel with control voltage transformer







TANK



ASCOT NO.	MFG. NO.	HP OR HPD	PART NO.	MFG. NO.	VOLTS	CAPACITY (GAL.)*	CFM DEL'Y	RPM	DIMENSIONS (LXWXH)	WEIGHT (LBS.)
101-00058	VR5-8	5	ADVA-S01	R-15B	230/1	80V	17.0	737	35 x 27 x 75	590
101-00078	VR5-8	5	ADVA-S05	R-15B	208/3	80V	17.0	737	35 x 27 x 75	590
101-00158	VR5-8	5	ADVA-S126	R-15B	230/1	80V	17.0	737	35 x 27 x 75	590
101-01012	VR5-8	5	ADVA-S03	R-15B	230/3	80V	17.0	737	35 x 27 x 75	590
101-11012	VR5-8	5	ADVA-S148	R-15B	230/3	80V	17.0	737	35 x 27 x 75	590
101-40780	VR7F-8	7.5	ADVA-S168	R-15B	208/1	80V	22.3	949	35 x 27 x 75	630
101-40781	VR7F-8	7.5	ADVA-S13	R-15B	230/1	80V	22.3	949	35 x 27 x 75	630
101-40782	VR7F-8	7.5	ADVA-S17	R-15B	208/3	80V	22.3	949	35 x 27 x 75	630
101-40783	VR7F-8	7.5	ADVA-S15	R-15B	230/3	80V	22.3	949	35 x 27 x 75	630
101-41012	VR10-12	10	ADVA-S21	R-30D	208/3	120V	33.8	718	43 x 30 x 81	895
101-41112	VR10-12	10	ADVA-S19	R-30D	230/3	120V	33.8	718	43 x 30 x 81	895
101-42112	HR10-12	10	ADVA-S25	R-30D	208/3	120H	33.8	718	71 x 32 x 55	895
101-44112	HR10-12	10	ADVA-S23	R-30D	230/3	120H	33.8	718	71 x 32 x 55	895
101-41512	HR15-12	15	ADVA-S33	R-40A	208/3	120H	54.1	776	73 x 36 x 62	1210
101-42512	HR15-12	15	ADVA-S31	R-40A	230/3	120H	54.1	776	73 x 36 x 62	1210
101-43512	HR25-12	25	ADVA-S37	R-70A	208/3	120H	90.7	776	74 x 36 x 65	1557
101-44512	HR25-12	25	ADVA-S35	R-70A	230/3	120H	90.7	776	74 x 36 x 65	1557

^{*} V: Vertical, H: Horizontal Configuration



CHAMPION

DUPLEX AIR COMPRESSORS

FULLY PACKAGED COMPRESSORS:

Compressors equipped with all of the desired options such as Mounted Control Panel, Low Oil Level Monitor, Automatic Tank Drain, Air-Cooled Aftercooler and Vibration Isolators.

DUPLEX FULLY PACKAGED COMPRESSORS:

Two (2) Compressors and accessories supplied in one package provides the flexibility of single operations, alternating between compressors, or duplex operations to meet high air demands • INCLUDES: Automatic Tank Drain, Vibration Isolators, Two (2) Mounted Control Panels plus alternator, Low Oil Level Monitors and Air Cooled Aftercoolers.

CHAMPION PREMIUM EXTENDED WARRANTY KITS AVAILABLE



ASCOT NO.	MFG. NO.	HP	VOLTAGE/PHASE	TANK SIZE	TANK CONFIG.	PUMP MFG. NO.	ACFM @175 PSIG	ACAC
101-51120	HR5D-12	5	230/1	120	Horiz.	R-15B	34.6	STD
101-53120	HR5D-12	5	208/3	120	Horiz.	R-15B	34.6	STD
101-54120	HR5D-12	5	230/3	120	Horiz.	R-15B	34.6	STD
101-75120	HR7D-12	7.5	230/1	120	Horiz.	R-30D	51.6	STD
101-75320	HR7D-12	7.5	208/3	120	Horiz.	R-30D	51.6	STD
101-75420	HR7D-12	7.5	230/3	120	Horiz.	R-30D	51.6	STD
101-10325	HR10D-25	10	230/3	250	Horiz	R-30D	69.6	STD

CHAMPION GASOLINE AIR COMPRESSORS

- Truck Bed Mountable, ideal for Field Service Applications Heavy Duty Two-Stage Compressors • V-Belt Drive with Totally Enclosed Belt Guard
- Centrifugal unloader for loadless start prolongs motor life Gasketless Design
- Vibration Isolators Included on 30 gallon models Each new assembled unit comes with a three-year standard warranty, six-year extended warranty

ASCOT NO. MFG. NO. DESCRIPTION

KITS									
106-37831	CC1137831	KOHLER KIT: Maintenance Kit for 14HP Kohler Engine Gasoline Air Compressor. Includes: Pre- filter, air filter, spark plug, fuel filter, engine oil, Champion air filter and compressor oil							
106-37832	CC1137832	HONDA KIT: Maintenance Kit for 13HP Honda Engine Gasoline Air Compressor. Includes: Air filter, spark plug, engine oil, Champion air fliter and compressor oil							



ASCOT NO.	MFG. NO.	HP OR HPD	TANK SIZE	TANK CONFIG.	ENGINE TYPE	ACFM @175 PSIG	RPM	APPROX. SHIP WEIGHT (LBS.)
102-11530	HGR7-3H	13	30	Horiz.	Honda	23.2	1025	434
102-11560	HGR7-6H	13	60	Horiz.	Honda	23.2	1025	500
102-11880	HGR7-8H	13	80	Horiz.	Honda	23.2	1025	539
102-13730	HGR7-3K	14	30	Horiz.	Kohler	23.2	1025	434
102-13760	HGR7-6K	14	60	Horiz.	Kohler	23.2	1025	500
102-13780	HGR7-8K	14	80	Horiz.	Kohler	23.2	1025	539

RV Series



RV-SERIES RECIPROCATING AIR COMPRESSORS

• Two-stage, splash lubricated compressor pump • 5 - 15 HP • Up to 175 PSIG • 17.3 - 49 ACFM at 175 PSIG rating • Tank mounted, vertical or horizontal configuration • Automatic start/stop operation • Factory filled with ChampLub AC lubricant • Mounted Magnetic Starters standard on all Centurion II models (Except for 5 HP models with 3450 RPM motors)



					12	5 PSI RAT	ING*	175	S PSI RAT	ING*		
ASCOT NO.	MFG. NO.	НР	TANK SIZE	PUMP MFG NO.	RPM	CFM DISPL.	RATING CFM DEL'Y	RPM	CFM DISPL.	RATING CFM DEL'Y	DIMENSIONS (LXWXH)	APPROX. SHIP WT. (LBS.)
101-65801	VRV5-8	**5	80	RV-15A	805	23.5	17.3	715	20.8	16.5	33" x 26-5/8" x 76"	530
101-67581	VRV7F-8	**7.5	80	RV-15A	990	28.7	23.1	975	28.6	22.1	33" x 26-5/8" x 76"	595
101-67514	HRV7-12	7.5	120	RV-30A	670	39.6	25.8	570	31.9	24.0	72.5" x 24" x 54"	820
101-67583	VRV7-8	7.5	80	RV-15A	670	39.6	25.8	570	31.9	24.0	33" x 26-5/8" x 76"	595
101-67515	VRV7-12	7.5	120	RV-30A	670	39.6	25.8	570	31.9	24.0	42.5" x 30" x 79"	820
101-61212	HRV10-12	10	120	RV-30A	810	47.3	34.8	699	40.7	32	72.5" x 24" x 54"	890
101-61081	VRV10-8	10	80	RV-30A	810	47.3	34.8	699	40.7	32	42.5" x 30" x 66.75"	675
101-61012	VRV10-12	10	120	RV-30A	810	47.3	34.8	699	40.7	32	42.5" x 30" x 79.75"	910
101-61512	HRV15F-12	15	120	RV-30A	1045	60.9	49	1020	59.5	46.8	72.5" x 24" x 54"	960
101-61513	VRV15F-12	15	120	RV-30A	1045	60.9	49	1020	59.5	46.8	46-3/8" x 30" x 79.75"	980

*Units tested in accordance with CAGI/PNEUROP Acceptance Test Code PH2CPTC2 **Available with either 1750 or 3450 RPM. Starter not required for 5HP 3450RPM motor. Starter required for 7.5HP 3450RPM motor.



Centurion



CENTURION II | 13 HP RECIPROCATING COMPRESSOR/GENERATOR

• Two-stage splash lubricated RV15A compressor pump • Honda GX390 engine with electric start • Industrial 4000-watt generator with (2) 120V, 15 amp and (1) 240V, 20 amp receptacles • Twin 4-gallon horizontal air receiver tanks • Manual receiver drain valve • Lifting hook • Belt drive with totally enclosed belt guard • Gas pilot valve

• Comprehensive base plate • INCLUDES: (2) Pressure gauges - the left gauge indicates tank pressure and the right gauge indicates output pressure; adjustable pressure regulator; pressure relief valve, air socket

	GAS									175 PSI RAT	ING*		
ASCOT NO.	MFG. NO.	PART. NO.	ENGINE MODEL	HP	TANK CAP. (GAL)	PUMP MFG NO.	CONTINUOUS GENERATOR WITH COMP OFF-LOAD	MAX. AC OUTPUT	RPM	CFM DISPL.	RATING CFM DEL'Y	DIMENSIONS (LXWXH)	APPROX. SHIP WEIGHT (LBS.)
101-73904	HGRV7-LPH-G	CC1153480	HONDA GX390	13	(2) 4	RV-15A	3500 watts	4000 watts	784	22.9	17.9	46" x 22" x 35"	490

Evolution

EVOLUTION: QUIET ENCLOSED RECIPROCATING AIR COMPRESSORS

• Sound levels as low as 67dBA • 12-gauge steel enclosure • Separate compressor and motor chambers with dedicated cooling circuits provide cooler operation and long-life • Separate inner base reduces vibration and noise • Oil-site gauge and filter maintenance indicator provide notification of routine maintenance • Innovative Belt-tensioning system



ASCOT NO.	MFG. NO.	НР	TANK CONFIG.	TANK CAP. (GAL.)	PUMP MFG. NUMBER	RPM	SHIP WEIGHT (LBS.)
101-58000	HER5-8	5	Horiz.	80	RP-15B	734	733 Lbs.
101-78000	HER7F-8	7.5	Horiz.	80	RP-15B	990	762 Lbs.

CHAMPION



CHAMPION MAINTENANCE PARTS



ASCOT NO.	MFG. NO.	DESCRIPTION
106-28530	M2853	Pilot Unleader Valve for Gas Compressors
106-89090	P08909A	Champion Oil, 1-Gallon
106-94730	P09479A	Champion Oil, 1-Quart
117-05050	P05050A	Filter Element for Gas and Small Electric Units
117-05051	P05051A	Filter Element for Large Electric Units
106-11882	Z11882	Compressor Service Kit for RV-15/R-15 Pump INCLUDES: Lubricant, Air Filters & Oil Filter
106-11883	Z11883	Compressor Service Kit for RV-30/R-30 Pump INCLUDES: Lubricant, Air Filters & Oil Filter
106-11884	Z11884	Compressor Service Kit for R-40 Pump INCLUDES: Lubricant, Air Filters & Oil Filter
106-13194	CC1031194	Engine Maintenance Kit for 13 HP Gas Compressors
106-00519	M519C	Replacement 1/4 NPT Gauge for Compressors

▲WARNING: For more information go to www.P65Warnings.ca.gov.

CHAMPION VOLTAGE CONVERSION KITS

• If 460V, 3 phase service is needed voltage conversion kits are available



ASCOT NO.	MFG. NO.	DESCRIPTION
106-11727	TEN011727	Voltage Conversion Kit, Simplex – 5HP and 7.5HP from 230V/3 Phase to 460V/3 Phase
106-11728	TEN011728	Voltage Conversion Kit, Simplex – 10HP from 230V/3 Phase to 460V/3 Phase
106-11729	TEN011729	Voltage Conversion Kit, Simplex – 15HP from 230V/3 Phase to 460V/3 Phase
106-11730	TEN011730	Voltage Conversion Kit, Simplex – 25HP from 230V/3 Phase to 460V/3 Phase

L-SERIES

Rotary Screw Air Compressors

The Champion L-Series Rotary Screw Compressors are highly competitive, expertly-designed packages that use the latest design techniques to give you industry-leading reliability, performance, and value. When used in 100% duty cycle applications, Rotary Screw compressors from Champion are a great, guiet alternative to a reciprocating compressor.

STANDARD FEATURES:

- · Advanced but simple package design lowering maintenance and service costs and lengthening service life
- · Belt-driven
- Integrated Airends ensure superior serviceability
- · Available in fixed and variable speed
- · State-of-the-art dual position pilot controller
- · High-quality, sound -insulating enclosure panels
- · Low-noise, thermostaticallycontrolled, motor-driven fan
- Tank or basemount with optional dryer configurations (AirStation)
- Zero air-loss auto tank drain on Air Station
- L- SERIES WARRANTY: Standard one-year warranty on package, premium ten-year warranty available











LV/LVR-Series **Rotary Vane Air Compressors**





LV-Series: Simplex

Refrigerated Air Dryers

REFRIGERATED AIR DRYERS - SPECIAL FEATURES:

- Effective moisture removal at all flow rates
- Optional pre and post filtration available for dryer
- Ideal for air compressors equipped with an air cooled aftercooler

ASCOT NO.	MFG. NO.	FLOW	VOLTAGE	IN/OUT CONNECT.	SIZE (LXWXH)	APPROX. SHIP WEIGHT (LBS.)
105-00015	CGD15A1	15	115/1	3/8" OD	15x13x13	69
105-00025	CGD25A1	25	115/1	3/4"	22x16x15	88
105-00035	CGD35A1	35	115/1	3/4"	22x16x15	92
105-00050	CGD50A1	50	115/1	3/4"	22x20x20	101
105-00075	CGD75A1	75	115/1	1"	24x15x33	123
105-00100	CGD100A1	100	115/1	1"	24x15x33	129
105-00125	CGD125A1	125	115/1	1"	24x15x33	135
105-00150	CGD150A1	150	115/1	1"	24x15x37	148



C-Aire Compressors

C-AIRE SIMPLEX COMPRESSORS

• Oversized after coolers remove over 60% of water vapor, humidity or moisture • Large displacement 3-cylinder pumps run slower thus increasing the longevity and contributes to them being quieter • ALL UNITS INCLUDE: Ball valve, tank drain, oil drain tube, full synthetic oil, large sight glass and liquid fill gauge • Installation kit only included with Fully Packaged units (4 mounting pads, 4 anchor bolts, 12" steel braided flex hose)








ASCOT NO.	MFG. NO.	НР	STAGE	CFM @175 PSIG	PUMP	PUMP RPM	MAIN BEARINGS	OIL	VOLTS	AMPS	MOTOR RPM	BREAKER SIZE	TANK SIZE (GAL.)	DIMENSIONS (LXWXH)	WT. (LBS.)
101-50080	A050V080-1230	5	2	17	2 Cylinder Cast Iron	885	50,000 Hours	Full Synthetic	208/230, 1 Phase	21@208V, 19.1@230V	1745	40 Amp	80	35" x 24" x 70"	515
101-75080	A075V080-1230	7.5	2	24	3 Cylinder Cast Iron	649	50,000 Hours	Full Synthetic	208/230, 1 Phase	33.3@208V, 31.3@230V	1760	50 Amp	80	34" x 24" x 73"	625


C-AIRE GAS ENGINE COMPRESSOR

• Two-Stage compressor that is just the right size for a service truck using a 1" or 3/4" impact wrench and is great for farm service use • INCLUDES: Ball valve, Honda engine, electric start, engine idle down, oil drain tube, tank drain, large displacement 3 cylinder pumps, large oil sight glass, liquid filled gauge, full synthetic oil & mounting pads





ASCOT NO.	MFG. NO.	НР	STAGE	CFM @175 PSIG	PUMP	PUMP RPM	MAIN BEARINGS	OIL	MOTOR RPM	TANK SIZE (GAL.)	DIMENSIONS (LXWXH)	WT. (LBS.)
102-13030	A130H030-G	13	2	26	3 Cylinder Cast Iron	745	50,000 Hours	Full Synthetic	800	30	42" x 17" x 45"	474

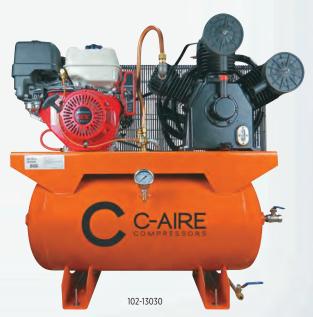



Ingersoll Rand Air Compressors



TWO-STAGE ELECTRIC "VALUE PACKAGE"

• Priced right and designed for the most demanding applications where a dependable air supply is required • EACH PACKAGE INCLUDES: A two-stage cast iron compressor pump, ODP electric motor, magnetic motor starter (mounted and wired), automatic start and stop pressure switch control, mounted on an ASME rated receiver tank • Available voltages: 230/1/60 (5-7.5 HP), 200/3/60, 460/3/60 • Pressure up to 175 PSIG • Oil sight glass included on 10-15 HP Packages

ASCOT NO.	MFG. NO.	НР	ACFM @175 PSIG	TANK
101-23451	2340L5-V	5	14.7	60 Gallon Vertical
101-24705	2475N5-V	5	16.8	80 Gallon Vertical
101-24751	2475N7.5-V	7.5	24	80 Gallon Vertical
101-25452	2545E10-V	10	35	120 Gallon Horizontal
101-71150	7100E15-V	15	50	120 Gallon Horizontal

TWO-STAGE GASOLINE **ENGINE DRIVEN**

• Ideal for fleet or field service applications with truck bed mounting design • Idle engine control and electronic ignition for easier starting • Powder coat paint finish to protect against outdoor elements • 30-gallon ASME receiver and OSHA fully enclosed belt guard for worker safety

ASCOT NO.	MFG. NO.	НР	ENGINE	ACFM @175 PSIG	TANK
102-24125	2475F14G	14	Kohler	25	30 Gallon Horizontal
102-24212	2475F13.GH	13	Honda	25	30 Gallon Horizontal





Ingersoll Rand Air Compressors (cont.)



TWO-STAGE ELECTRIC "FULLY PACKAGED"

- · Everything you need for a dependable air supply with minimal maintenance • FULLY PACKAGED COMPRESSORS INCLUDE: Magnetic motor starter, air cooler and electric drain valve which removes harmful moisture, plus, the added protection of a low oil level shutdown switch
- AVAILABLE VOLTAGES: 230/1/60 (5-7.5 HP), 200/3/60, 460/3/60

INGERSOLL-RAND START-UP MAINTENANCE KITS

• All the parts needed to maintain your compressor for a full year, plus the added protection of extended warranty coverage are two very distinct advantages you'll gain with the All Season Select synthetic pump lubricant and replacement air filter elements • Kits for gasoline engine driven compressors also include engine air filter, oil filter and engine oil




ASCOT NO.	MFG. NO.	НР	ACFM @175 PSIG	TANK
101-27550	2475N5-P	5	16.8	80 Gallon Vertical
101-27551	2475N7.5-P	7.5	24	80 Gallon Vertical
101-27552	2545K10-P	10	35	120 Gallon Vertical
101-27553	2545E10-P	10	35	120 Gallon Horizontal
101-71153	7100E15-P	15	50	120 Gallon Horizontal

ASCOT NO.	MFG. NO.	DESCRIPTION
106-24305	32305880	Ingersoll Rand 2340/2475 Electric Air Compressor Start Up Kit
106-24710	32305898	Ingersoll Rand 2545/7100 Electric Air Compressor Start Up Kit
106-30020	32305906	Ingersoll Rand 15ST Electric Air Compressor Start Up Kit
106-24712	32305872	Ingersoll Rand 2475F12.5G Kohler Gas Compressor Start Up Kit





NITROGEN PERCENTAGE INDICATOR

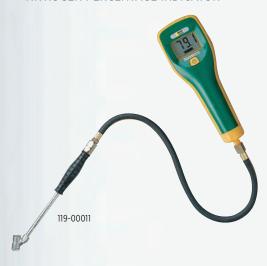

• Accurate and easy to use • Compact and ergonomic in design • Simple to operate, one button design • Battery charge indicator • Auto-power off function • Replaceable battery and sensor • Auto diagnostic with error code to simplify troubleshooting

DESCRIPTION ASCOT NO. MFG. NO. 119-00011 Nitro-1 Nitrogen Purity Gauge

Branick Nitrogen **Inflation Systems**

BRANICK 130 NITROGEN INFLATION SYSTEM

The MODEL 130 can be used with a nitrogen bottle or connected to a nitrogen generator to inflate up to 6 (4 hoses included) tires with high purity nitrogen. The integrated auto-inflator has a pressure range up to 145 psi and performs top-offs as well as automated nitrogen conversions, just set the pressure and the inflator does the rest. Branick equipment lasts and our Model 130 is no different, with all steel construction to take everyday use. The rechargeable battery has a visible charging indicator to let you know when you're ready to go. The mobility and features of the Model 130 make nitrogen service simple, fast and economical.

• Hands Free Auto-inflator • Convert up to 6 tires (requires 2 optional hoses) • Rechargeable battery with indicator • Convenient parts tray • Durable all-steel construction



119-00485

ASCOT NO. 119-00485

MFG. NO. 485

DESCRIPTION Branick 485 Nitrogen Inflation System

VALVE CAPS FOR NITROGEN INFLATED TIRES





468-00307

			468-00207 4
ASCOT NO.	MFG. NO.	DESCRIPTION	400-00207 4
468-00207	Cap PG	Green Plastic Nitrogen Cap	
468-00307	TS-OR	Green Valve O-ring	ž Š
468-00607	NITSLV	Nitrogen Sleeve	
468-10100	VC10	Blue Plastic Nitrogen Caps (100/Box)	468-0060
468-17492	17-492LG	Green Plastic Cap for Long Sleeve TPMS Snap-in Valves	
468-20695	20695	Green Plastic Nitrogen Cap with Long Skirt for 20008 Snap-in TPMS Valve (100/Box)	
468-26541	6541N-2	Dill Double Seal Cap with Green Sleeve	468-10100
468-43607	436075	High Quality Green Stamped Chrome	3
468-59019	59-0019	Aluminum Nitrogen Valve Cap (100/Box)	No
468-59021	59-0021	Chrome Nitrogen Valve Cap (100/Box)	





468-59019





BRANICK 485 NITROGEN INFLATION SYSTEM

• The 485 is totally automatic and completely mobile, enabling the operator to wheel the unit directly to any vehicle • Zero installation costs • No electrical requirements to operate • Industrial grade HD battery • Efficient membrane

• Low maintenance cost • Connect to any air-line and you're inflating tires. Plug and Play!

ASCOT NO 119-00130

MFG NO 130

Branick 130 Nitrogen Inflation System

DESCRIPTION



119-00130





ELECTRIC AUTOMATIC COMPRESSOR DRAIN

· Automatically drains filters, compressor tanks, drip legs, aftercoolers and receivers . Opens and closes valve in 1 to 60 minute cycle times and 1 to 30 second blow down time • 1/4" NPT connection • Includes Y-strainer



DESCRIPTION ASCOT NO MFG. NO.

117-05702 5702S Electric Automatic Compressor Drain

MINI IN-LINE DISPOSABLE DESICCANT DRYER

· Point-of-use, patented, disposable, mini in-line desiccant dryer removes water vapor, oil vapor and dirt • Point-of-use on blow guns or spray guns as final protection for critical parts during blow off and paint spraying • See-through housing shows desiccant bead color change from blue to pink indicating dryer needs to be replaced • 1/4" NPT connection



ASCOT NO. MFG. NO. DESCRIPTION QTY. 117-00010 DFD-10 Disposable Desiccant Dryer | 2

117-00010

AUTOMATIC COMPRESSOR DRAIN

• Automatically expels liquids from piping network in compressed air systems • Use in low spots in an air system where water accumulates • Float type drain features a protective stainless steel screen with umbrella baffle, providing large sump area for oil, sludge and dirt • 1/2" NPT top threaded port

ASCOT NO. MFG. NO. DESCRIPTION 117-05304 T53-04W Automatic Drain

IN-LINE AIR **TOOL FILTER**

• In-line filter protects air tools from dirt and debris • 1-9/16" length, 1/2 oz. • 40 micron sintered bronze element • Inlet can be attached directly to pneumatic tools • 1/4" male x 1/4" female NPT

MFG. NO. DESCRIPTION ASCOT NO In-Line Air Tool Filter 117-09132 9132



117-05304



117-09132

HOW TO DETERMINE THE GALLONS OF WATER ACCUMULATED PER 8 HOURS OF USE

Follow the steps below to determine the gallons of water accumulated by a compressed air system per 8 hours of use:

- 1 Determine the ambient temperature (outside temperature surrounding the dryer) and relative humidity.
- 2. Locate ambient temperature in first column of water factor chart.
- 3. Follow the row over to percent of humidity. This indicates the number of gallons accumulated by your air compressor in an 8-hour period.

Ambient Air Temperature	20% Humidity	30% Humidity	40% Humidity	50% Humidity	60% Humidity	70% Humidity	80% Humidity	90% Humidity	100% Humidity
			GALLONS OF	WATER PER	8 HOURS @	100 SCFM			
120°F	18.6	27.9	37.2	46.5	55.8	65.1	74.4	83.7	93.0
110°F	14.1	21.0	27.9	35.1	42.0	48.9	55.8	63.0	69.9
100°F	10.5	15.6	20.7	26.1	31.2	36.6	41.7	46.8	52.2
90°F	7.8	11.4	15.3	19.2	23.1	26.7	30.6	34.5	38.4
80°F	5.7	8.4	11.1	13.8	16.8	19.5	22.2	24.9	27.9
70°F	3.9	6.0	7.8	9.9	12.0	13.8	15.9	18.0	19.8
60°F	2.7	4.2	5.7	6.9	8.4	9.9	11.1	12.6	14.1
50°F	2.1	3.0	3.9	4.8	6.0	6.9	7.8	8.7	9.9
40°F	1.2	2.1	2.7	3.3	3.9	4.8	5.4	6.0	6.6
30°F	.9	1.2	1.8	2.1	2.7	3.0	3.6	3.9	4.5
20°F	.6	.9	1.2	1.5	1.7	1.9	2.1	2.4	2.7
10°F	.3	.5	.7	.8	1.0	1.2	1.4	1.5	1.8

EXAMPLE: 25HP air compressor delivers 100 SCFM. Ambient Temp. = 100°F Relative Humidity = 60%

Water factor chart number is 31.2

Compressed air system accumulates 31.2 gallons of water per 8 hours of use.





Filters and Regulators

FILTER/REGULATOR COMBINATION UNITS

- Combines filter and pressure regulator into one space saving unit • Output performance equal to an individual filter and regulator • Reduced pressure outputs of 0-125 PSIG
- FEATURES THREE POSITION NON-RISING KNOB: push to lock, pull to adjust, detach to make tamper resistant • Available in metal bowl or polycarbonate bowl with metal bowl guard







- 1	1	4	_	7	ς	Z	^
- 1	1	7		,	J	J	u

ASCOT NO.	MFG. NO.	PIPE SIZE	ADJUSTMENT TYPE	MAX. FLOW SCFM	BOWL CAPACITY	BOWL TYPE	DRAIN	GAUGE PART NO.	OPERATING TEMP.	MAX. PRESSURE
114-75200	B752T	1/4"	T-Handle	50	5 Oz.	Poly	Manual	117-01481*	40-125°F	150 PSIG
114-75201	B752WT	1/4"	T-Handle	50	6 Oz.	Metal	Manual	117-01481*	40-175°F	250 PSIG
114-75202	B752FW	1/4"	Knob	50	6 Oz.	Metal	Float Auto	117-01481*	40-125°F	175 PSIG
114-75203	B752Z	1/4"	Knob	50	5 Oz.	Poly	Piston Auto	117-01481*	40-125°F	150 PSIG
114-75300	B753T	3/8"	T-Handle	80	5 Oz.	Poly	Manual	117-01481*	40-125°F	150 PSIG
114-75301	B753WT	3/8"	T-Handle	80	6 Oz.	Metal	Manual	117-01481*	40-175°F	250 PSIG
114-75302	B753FW	3/8"	Knob	80	6 Oz.	Metal	Float Auto	117-01481*	40-125°F	175 PSIG
114-75303	B753Z	3/8"	Knob	80	5 Oz.	Poly	Piston Auto	117-01481*	40-125°F	150 PSIG
114-00754	B754GW	1/2"	Knob	100	6 Oz.	Metal	Manual	Included	40-175°F	250 PSIG
114-75400	B754T	1/2"	T-Handle	100	5 Oz.	Poly	Manual	117-01481*	40-125°F	150 PSIG
114-75401	B754WT	1/2"	T-Handle	100	6 Oz.	Metal	Manual	117-01481*	40-175°F	250 PSIG
114-75402	B754FW	1/2"	Knob	100	6 Oz.	Metal	Float Auto	117-01481*	40-125°F	175 PSIG
114-75403	B754Z	1/2"	Knob	100	5 Oz.	Poly	Piston Auto	117-01481*	40-125°F	150 PSIG

^{*}NOTE: Gauge not included. Sold separately. Ascot part number indicated.

MODULAR UNITS

• UNITS INCLUDE: A filter, regulator and lubricator and/or filter, regulator and oil removing filter • Units equipped with or without OSHA safety lock-out valves • Gauge included • Screwdriver only tool needed to connect or disconnect units • Insert interlocking feature allows simple installation in any location



ASCOT NO.	MFG. NO.	PIPE SIZE	MAX. FLOW SCFM	BOWL CAPACITY	BOWL TYPE	DRAIN	LOCKOUT DRAIN	OPERATING TEMP.	MAX. PRESSURE
114-03352	C33352W	1/4"	100	6 Oz.	Metal	Manual	Not Included	40-175°F	250 PSIG
114-13352	VC33352W	1/4"	100	6 Oz.	Metal	Manual	Included	40-175°F	250 PSIG
114-03353	C33353W	3/8"	100	6 Oz.	Metal	Manual	Not Included	40-175°F	250 PSIG
114-13353	VC33353W	3/8"	100	6 Oz.	Metal	Manual	Included	40-175°F	250 PSIG
114-03354	C33354W	1/2"	100	6 Oz.	Metal	Manual	Not Included	40-175°F	250 PSIG
114-13354	VC33354W	1/2"	100	6 Oz.	Metal	Manual	Included	40-175°F	250 PSIG







GENERAL PURPOSE FILTERS

- Removes harmful water condensate, pipe scale, dirt and rust from your compressed air system • Prevents corrosive damage to compressed air equipment and finished products • Protects components and air tools from premature failure • Installed upstream of regulators to prevent valve failure • Also used as pre-filters to oil removing and coalescing filters to ensure
- high efficiency and long element life in applications such as paint spraying, instrumentation and pharmaceuticals • Porous sintered bronze element



ASCOT NO.	MFG. NO.	PIPE SIZE	MAX. FLOW SCFM	BOWL CAPACITY	BOWL TYPE	DRAIN	OPERATING TEMP.	MAX. PRESSURE	FILTER ELEMENT
111-30002	F300-02	1/4"	27	1 Oz.	Poly	Manual	40°-125°F	150 PSIG	20 micron
111-35200	F352	1/4"	48	5 Oz.	Poly	Manual	40°-125°F	150 PSIG	40 micron
111-35201	F352W	1/4"	48	6 Oz.	Metal	Manual	40°-160°F	250 PSIG	40 micron
111-35202	F352Z	1/4"	48	5 Oz.	Poly	Piston Auto	40°-125°F	150 PSIG	40 micron
111-35203	F352FW	1/4"	48	6 Oz.	Metal	Float Auto	40°-120°F	175 PSIG	40 micron
111-35300	F353	3/8"	75	5 Oz.	Poly	Manual	40°-125°F	150 PSIG	40 micron
111-35301	F353W	3/8"	75	5 Oz.	Metal	Manual	40°-160°F	250 PSIG	40 micron
111-35302	F353Z	3/8"	75	6 Oz.	Poly	Piston Auto	40°-125°F	150 PSIG	40 micron
111-35303	F353FW	3/8"	75	6 Oz.	Metal	Float Auto	40°-120°F	175 PSIG	40 micron
111-35400	F354	1/2"	100	5 Oz.	Poly	Manual	40°-125°F	150 PSIG	40 micron
111-35401	F354W	1/2"	100	6 Oz.	Metal	Manual	40°-160°F	250 PSIG	40 micron
111-35402	F354Z	1/2"	100	5 Oz.	Poly	Piston Auto	40°-125°F	150 PSIG	40 micron
111-35403	F354FW	1/2"	100	6 Oz.	Metal	Float Auto	40°-120°F	175 PSIG	40 micron
111-37600	F376W	3/4"	230	10 Oz.	Metal	Manual	40°-160°F	250 PSIG	40 micron
111-37601	F376FW	3/4"	230	10 Oz.	Metal	Float Auto	40°-120°F	175 PSIG	40 micron
111-32908	F329-08	1"	300	29 Oz.	Metal	Manual	40°-160°F	250 PSIG	40 micron
111-32910	F329-10W	1-1/4"	400	29 oz.	Metal	Manual	40°-160°F	250 PSIG	40 micron
111-32912	F329-12W	1-1/2"	425	29 oz.	Metal	Manual	40°-160°F	250 PSIG	40 micron

COALESCING/OIL REMOVING FILTERS

• Removes submicron particles, particularly oil • APPLICATIONS INCLUDE: Paint spraying, pneumatic control instrumentation, printing and protection of air bearings • For maximum efficiency, a pre-filter needs be to installed upstream of oil-removing filter • Bonded end seals eliminate aerosol leakage past the element • Inner and outer support ribs are chemical resistant and strengthen element structure • Drain layers allow filtered elements to drop to bottom of filter with barrier to prevent reentry of drops to downstream air





ASCOT NO.	MFG. NO.	PIPE SIZE	MAX. FLOW SCFM	BOWL CAPACITY	BOWL TYPE	DRAIN	OPERATING TEMP.	MAX. PRESSURE	FILTER ELEMENT
115-55200	F552FW	1/4"	24	6 Oz.	Metal	Float Auto	40°-120°F	175 PSIG	.03 micron
115-55201	F552W	1/4"	24	6 Oz.	Metal	Manual	40°-160°F	250 PSIG	.03 micron
115-55300	F553FW	3/8"	37	6 Oz.	Metal	Float Auto	40°-120°F	175 PSIG	.03 micron
115-55301	F553W	3/8"	37	6 Oz.	Metal	Manual	40°-160°F	250 PSIG	.03 micron
115-55400	F554FW	1/2"	37	6 Oz.	Metal	Float Auto	40°-120°F	175 PSIG	.03 micron
115-55401	F554W	1/2"	37	6 Oz.	Metal	Manual	40°-160°F	250 PSIG	.03 micron
115-57601	F576W	3/4"	60	10 Oz.	Metal	Manual	40°-160°F	250 PSIG	.03 micron
115-50508	F508-08W	1"	300	29 Oz.	Metal	Manual	40°-160°F	250 PSIG	.03 micron
115-50810	F508-10W	1-1/4"	300	60 Oz.	Metal	Manual	40°-160°F	250 PSIG	.03 micron
115-50812	F508-12W	1-1/2"	400	60 Oz.	Metal	Manual	40°-160°F	250 PSIG	.03 micron

Regulators and Lubricators





REGULATORS

- Specialized control valve reduces upstream supply pressure level to a specified constant downstream pressure • Regulates air pressure of the airline
- Self-relieving style units Available in T-handle or adjustment knob • Adjustment knob features three position non-rising knob: push to lock, pull to adjust, detach to make tamper resistant

Reinforced diaphragm for repeated accuracy







112-00378

112-00352

112-00262

ASCOT NO.	MFG. NO.	PIPE SIZE	MAX. FLOW SCFM	ADJUSTMENT TYPE	PRESSURE GAUGE PART NO.	GAUGE PART	OPERATING TEMP.	OPERATING PRESSURE
112-00162	R162	1/4"	25	Adjustment Knob	117-01681*	1/8" NPT	40°-120°F	5 to 125 PSIG
112-00262	R262**	1/4"	25	Adjustment Knob	117-01681*	1/8" NPT	40°-120°F	5 to 125 PSIG
112-00352	R352	1/4"	50	Adjustment Knob	117-01481*	(2) 1/4" NPT	40°-120°F	5 to 125 PSIG
112-00353	R353	3/8"	80	Adjustment Knob	117-01481*	(2) 1/4" NPT	40°-120°F	5 to 125 PSIG
112-00354	R354T	1/2"	100	T-Handle	117-01481*	(2) 1/4" NPT	40°-120°F	5 to 125 PSIG
112-00376	R376T	3/4"	220	T-Handle	117-01481*	(2) 1/4" NPT	40°-120°F	5 to 125 PSIG
112-00378	R378T	1"	250	T-Handle	117-01481*	(2) 1/4" NPT	40°-120°F	5 to 125 PSIG
112-03910	R3910	1-1/4"	700	T-Handle	117-01481*	(2) 1/4" NPT	40°-120°F	5 to 125 PSIG
112-03912	R3912	1-1/2"	700	T-Handle	117-01481*	(2) 1/4" NPT	40°-120°F	5 to 125 PSIG
112-01352	R352T				1/4" Regulator - T-H	andle		

1/2" High Pressure Regulator - 10 to 250 PSI

LUBRICATORS

112-01354

• Injects a fine stream of oil into the air stream to automatically lubricate air operated tools and other devices • Extends life of downstream components

R354GH

• Precise control of oil feed with needle valve adjustment knob • Adds minimal pressure drop to the air system • Features three position non-rising knob: push to lock, pull to adjust, detach to make tamper resistant • High air flow • Precise visual adjustment control • Low flow to establish drip rate • "W" is with sight glass and metal bowl





ASCOT NO.	MFG. NO.	PIPE SIZE	MAX. FLOW SCFM	BOWL CAP.	BOWL TYPE	OPERATING TEMP.	MAX. PRESSURE	OIL DELIVERY
113-00352	L352	1/4"	16	5 Oz.	Poly	40°-125°F	150 PSIG	2 SCFM
113-01352	L352W	1/4"	16	5 Oz.	Metal	40°-175°F	200 PSIG	2 SCFM
113-00353	L353	3/8"	82	5 Oz.	Poly	40°-125°F	150 PSIG	2 SCFM
113-01353	L353W	3/8"	82	5 Oz.	Metal	40°-175°F	200 PSIG	2 SCFM
113-00354	L354	1/2"	142	5 Oz.	Poly	40°-125°F	150 PSIG	2 SCFM
113-01354	L354W	1/2"	142	5 Oz.	Metal	40°-175°F	200 PSIG	2 SCFM
113-00376	L376W	3/4"	142	10 Oz.	Metal	40°-125°F	150 PSIG	2 SCFM
113-04108	4108W	1"	175	29 Oz.	Metal	40°-160°F	250 PSIG	2 SCFM

ACCESSORIES FOR FILTERS, **REGULATORS & LUBRICATORS**

ASCOT NO.	MFG. NO.	DESCRIPTION
117-00055	EK55	.03 Micron Coalescing Filter Element Replacement
117-00329	EKF329	40 Micron Filter Element - Fits 3/4" Units
117-00355	EK35-5	5 Micron Filter Element - Fits 1/4", 3/8" & 1/2" Units
117-00935	PMKR35	Filter/Regulator Mounting Kit
117-01481	1481	1/4" Back Mount Gauge
117-11481	1481B	1/4" Back Mount Gauge - 0-300 PSI
117-01681	1681	1/8" Back Mount Gauge
117-05200	5200	Internal Drain Assembly





Hose Reels

PREMIUM INDUSTRIAL HOSE REELS

• Compact design allows reels to fit into tight locations • Corrosion resistant powder coated paint • Extended service life due to permanently lubricated bearings and

swivels • Versatile applications include easy mounts on wall, floor, ceiling or truck • Air/ Water hose included



ASCOT NO.	MFG. NO.	HOSE ID	HOSE OD	HOSE LENGTH	HOSE PSI	TEMP.
124-04435	4435 OLP	1/4"	.475	35'	300	150°F
125-04625	4625 OLP	3/8"	.600	25'	300	150°F
125-05450	5450 OLP	1/4"	.475	50′	300	150°F
125-05635	5635 OLP	3/8"	.600	35'	300	150°F
125-05650	5650 OLP	3/8"	.600	50'	300	150°F
126-05850	A5850 OLP	1/2"	.750	50'	300	150° F
126-15650*	B5650 OLP	3/8"	.600	50'	300	150°F
126-15851*	B5850 OLP	1/2"	.750	50'	300	150°F

RT SERIES HOSE REELS

- Adjustable guide arm locates to seven positions
- · Oversized main shaft increases support
- Long life drive spring
- Easy to mount due to slotted mounting holes for safer and easier installation • Air/Water hose included • Models RT650-OLPG and RT850-OLPG specifically designed for dispensing nitrogen gas



ASCOT NO.	MFG. NO.	HOSE ID	HOSE OD	HOSE LENGTH	HOSE PSI	TEMP.
124-04500	RT450-OLP	1/4"	.475	50'	300	150°F
125-06350	RT635-OLP	3/8"	.600	35'	300	150°F
125-06500	RT650-OLP	3/8"	.600	50'	300	150°F
126-08500	RT850-OLP	1/2"	.750	50'	300	150°F

HEAVY DUTY INDUSTRIAL REELS

- Compact design
- Substantial support
- Air/Water (OLP), Oil (OMP) or Grease (OHP) • All-steel construction with engineered ribs/forms
- Baked-on powder coat finish provides corrosion resistance
- MADE IN THE USA



ASCOT NO.	MFG. NO.	HOSE ID	HOSE OD	HOSE LENGTH	HOSE PSI	TEMP.
125-07650	7650 OLP	3/8"	.600	50'	300	150°F
125-07670	7670 OLP	3/8"	.600	70'	300	150°F
126-07850	7850 OLP	1/2"	.750	50′	300	150°F
125-07651	7650 OMP	3/8"	.690	50′	2600	210°F
126-07851	7850 OMP	1/2"	.820	50′	3000	210°F
124-07450	7450 OHP	1/4"	.580	50′	5000	210°F
125-07652	7650 OHP	3/8"	.730	50'	4800	210°F

DUAL PEDESTAL HOSE REELS

- Compact dual pedestal design • Features an innovative, non-welded, interlocking base • Stand up to heavy vibration, ideal for truck-mounted applications
- Dual pedestal base and guide arm are structurally reinforced
- · All-steel construction and baked-on powder coat finish • MADE IN THE USA



ASCOT NO.	MFG. NO.	HOSE ID	HOSE OD	HOSE LENGTH	HOSE PSI	TEMP.
124-75435	DP5435 OLP	1/4"	.475	35'	300	150°F
124-75450	DP5450 OLP	1/4"	.475	50'	300	150°F
124-77450	DP7450 OLP	1/4"	.475	50'	300	150°F
125-75635	DP5635 OLP	3/8"	.600	35'	300	150°F
125-75650	DP5650 OLP	3/8"	.600	50'	300	150°F
125-77650	DP7650 OLP	3/8"	.600	50'	300	150°F
126-75835	DP5835 OLP	1/2"	.750	35'	300	150°F
126-77850	DP7850 OLP	1/2"	.750	50'	300	150°F





HEAVY DUTY MOBILE BASE HOSE REELS

• Designed to accommodate up to 100' of 3/8" I.D. hose or 75' of 1/2" I.D. hose • Slightly more robust than the standard 7000 series hose reels

• The heavy duty base design, all steel construction and a baked-on powder coat finish combine to produce a rugged, corrosion-resistant product

· A newly redesigned latching mechanism provides longer service life of the latch components • The-one piece guide roller design and stainless steel pins offer greater strength and easier serviceability • The high quality, die cast aluminum hub and

two sealed ball bearings produce a smoother spool rotation and easier operation • MADE IN THE USA



ASCOT NO.	MFG. NO.	HOSE ID	HOSE OD	HOSE LENGTH	HOSE PSI	TEMP.
125-76050	HD76050 OLP	3/8"	.600	50	300	150° F
125-76070	HD76070 OLP	3/8"	.600	70	300	150° F
125-76075	HD76075 OLP	3/8"	.600	75	300	150° F
125-76100	HD76100 OLP	3/8"	.600	100	300	150° F
126-78050	HD78050 OLP	1/2"	.750	50	300	150° F
126-78075	HD78075 OLP	1/2"	.750	75	300	150° F
126-79025	HD79025 OLP	3/4"	1 075	25	250	150° F

GENERAL INDUSTRIAL AIR/WATER

• Full flow swivel and heavy gauge steel frame • All-bolted unitized construction with no welds to fatigue • Hand Crank (CA) and 12VDC Electric Motor (EA) driven • MADE IN THE USA



ASCOT NO.	MFG. NO.	HOSE ID	HOSE OD	HOSE LENGTH	PSI
126-21120	CA32112 L	1/2"	.750	200'	1000
126-21121	EA32112 L12D	1/2"	.750	200'	1000
126-31120	CA33112 L	3/4"	1.075	100'	1000
126-31121	EA33112 L12D	3/4"	1.075	100'	1000
126-31180	CA33118 L	3/4"	1.075	175'	1000

CORD REELS OPEN STYLE

• For indoor, non-weather-tight applications only • All models UL listed at 125 volt 60 hz single phase; reels without cord suitable for 220 volt

• Incandescent bulb 75 watt maximum • Cord Included • MADE IN THE USA



ASCOT NO.	MFG. NO.	WIRE SIZE AWG	NO. OF WIRES	CORD LENGTH	VOLTS	MAX. AMPS
	11	NCANDESCE	NT			
312-40351	L 4035 163 1	16	3	35'	125	10
312-40501	L 4050 163 1	16	3	50'	125	10
	S	INGLE OUTL	ET			
312-40353	L 4035 163 3	16	3	35'	125	13
312-40503	L 4050 163 3	16	3	50'	125	13
312-45453	L 4545 123 3	12	3	45'	125	15
	T	RIPLE OUTL	ET			
312-45454	L 4545 123 9	12	3	45'	125	15
312-45455	L 4545 123 9G	12	3	50'	125	15
		LED				
312-40504	L 4050 163 10 (LED)	16	3	50'	125	13

ADJUSTABLE BUMPER STOPS

• Solid molded rubber assuring long life and nonslip grip • Allow desired length of hose or cord to be permanently stored outside the reel

ASCOT NO.	MFG. NO.	DESCRIPTION
127-11004	1-HR1004	3/8" Hose, 2.5" Diameter
127-11043	1-HR1004-3	3/8" Hose, 3" Diameter
127-21043	2-HR1004-3	1/2" Hose, 3" Diameter
127-11040	1-HR1004-A	1/4" Hose, 2.5" Diameter



127-11004

NITRO-PRO NITROGEN REEL

• EZ-Coil controlled retraction for greater safety • Special "Nitrogen green" proprietary "CPC" powder-coated finish for long lasting durability • Factory-matched lubricated containerized spring motor for trouble free, enduring performance • 50' of green 3/8" I.D. nitrogen hose & adjustable hose stop • Nitrogen quality seals in the solid brass, 360-degree swivel inlet



ASCOT NO.	MFG. NO.	HOSE ID	HOSE OD	HOSE LENGTH	HOSE PSI
127-05880	EZ-P-NP-350	3/8"	5/8"	50'	300

LOW PRESSURE HOSE REELS FOR AIR AND WATER

• High quality epoxy powder coated steel construction • Sturdy 1" solid steel axle with 1" self-lubricated precision bearings • Steel base plate and support post add stiffness reducing vibration • Multi-position guide arm adjusts to 10 different mounting positions • 8-position locking ratchet secures hose at desired length • Self-retracting spring return reels • Factory balanced cartridge-style spring motor provides safe maintenance • Solid brass NPT swivel with stainless steel stud bolts to reel • MADE IN THE U.S.A.



ASCOT NO.	MFG. NO.	HOSE ID	HOSE OD	HOSE LENGTH	HOSE PSI	
124-13500	P-LP-135	1/4"	1/2"	35'	250	
124-15000	P-LP-150	1/4"	1/2"	50'	250	
124-33500	P-LP-335	3/8"	5/8"	35'	250	
125-35004	P-LP-350	3/8"	5/8"	50'	250	
126-42500	P-LP-425	1/2"	3/4"	25′	250	
126-43500	SH-N-435	1/2"	3/4"	35'	250	
126-45000	SH-N-450	1/2"	3/4"	50′	250	
126-52500	SH-N-525	3/4"	1-1/16"	25'	250	



C-SERIES LOW PRESSURE HOSE REELS

- · Reels ideally suited for plant maintenance, service trucks or other industrial functions
- Standard hose for air and water • Single set screw to access spring casing
- Drive spring mechanism lubricated for life • One piece combination latch. spring arbor, main bearing and spool support for fewer moving parts • Durable powder coated finish • MADE IN THE USA



ASCOT NO.	MFG. NO.	OPERATING PRESSURE	HOSE ID	HOSE LENGTH	SHIP WEIGHT
125-35000	LC-350	300 PSI	3/8"	50′	54 Lbs.
125-55000	LC-550	300 PSI	1/2"	50′	60 Lbs.

EVOLUTION AND CLASSIC SERIES • These field-proven hose reels are preferred for general duty, automotive dealerships and independent garages • Steel base and outlet arm, provide strength and rigidity • All reels include hose,

ASCOT NO.	MFG. NO.	OPERATING PRESSURE	HOSE ID	HOSE LENGTH	SHIP WEIGHT
125-21408	2140-008	300 PSI	3/8"	50′	44 Lbs.
125-21410	2140-010	300 PSI	1/2"	30'	46 Lbs.
125-21215	2120-015	300 PSI	3/8"	50′	60 Lbs.



125-21408

125-21215

hose stop, and a 2.5' connecting hose

Air Hoses and Accessories



COUPLED AIR HOSES

- Reinforced with heavy duty polyester cord
- 325 PSI EPDM abrasion resistant cover Bend restrictors both ends • Premium machined brass alloy fittings • -40° to +200° F





ASCOT NO.	MFG. NO.	DESCRIPTION
121-01225	98101646	Coupled 1/2" x 25' Reinforced Domestic Air Hose
121-01250	98101648	Coupled 1/2" x 50' Reinforced Domestic Air Hose
121-03825	98101640	Coupled 3/8" x 25' Reinforced Domestic Air Hose
121-03851	98101642	Coupled 3/8" v 50' Reinforced Domestic Air Hose

1/4" BULK DOMESTIC AIR HOSE

- Used in automotive, agricultural and construction applications
- 1/4" ID x 325 PSI Temp Range: -40°F to +200°F • Multi-spiral polyester yarn reinforcement makes hose easy to handle and very flexible • EPDM tube and cover resists abrasion, heat and ozone • MADE IN THE USA





ASCOT NO. MFG. NO. 121-14700

1/4" x 700' Domestic Bulk Air Hose (325 PSI) Reel

COATS REPLACEMENT AIR HOSE

• For use with Coats Tire Changers • 60" long x 1/4" diameter • AC-1 Euro-style chuck • All brass connectors • Swivel fitting • Equivalent to Coats 806871



ASCOT NO. MFG. NO. DESCRIPTION

127-86871 86871-1 60" x 1/4" Coats Replacement Air Hose (Packaged 1 per bag)

HUNTER REPLACEMENT AIR HOSE

• For use with Coats Tire Changers • 60" long x 1/4" diameter • Europeanstyle air chuck • All brass connectors • Packaged 1 per bag



ASCOT NO.

127-86872

MFG. NO. 86872-1

DESCRIPTION

60" x ¼" Hunter Replacement Air Hose (Packaged 1 per bag)





BLUE RECOIL AIR HOSE

• Highly kink-resistant, withstands twisting or crushing • Swivel fittings • 150 PSI • Polyurethane tubing • Excellent abrasion resistance • Easy to handle: 25% lighter than rubber



ASCOT NO.	MFG. NO.	DESCRIPTION
123-14012	1/4x1/4x1/4x12	1/4" Blue Recoil Air Hose - 1/4" x 1/4" Swivel Fittings (12' Length)
123-14025	1/4x1/4x1/4x25	1/4" Blue Recoil Air Hose - 1/4" x 1/4" Swivel Fittings (25' Length)
123-14050	1/4x1/4x1/4x50	1/4" Blue Recoil Air Hose - 1/4" x 1/4" Swivel Fittings (50' Length)
123-38025	3/8x1/4x1/4x25	3/8" Blue Recoil Air Hose - 1/4" x 1/4" Swivel Fittings (25' Length)
123-38050	3/8x1/4x1/4x50	3/8" Blue Recoil Air Hose - 1/4" x 1/4" Swivel Fittings (50' Length)
123-38150	3/8x3/8x3/8x25	3/8" Blue Recoil Air Hose - 3/8" x 3/8" Swivel Fittings (25' Length)

HOSE CUTTER

· Hand tool for straight, even, clean cut on heater, air conditioning and braided rubber

or plastic ho		/8" diameter		
ASCOT NO.	MFG. NO.	DESCRIPTION		137-10010
137-10010	10010	Hose Cutter		137-10010
137-10011	10011	(2) High Grade Carbon Steel Replacement Blades	1	

RED HANDLED HOSE CUTTER

- · Powder coated aluminum body
- · Heat treated stainless steel cutting blade
- Ø3-36 mm rubber and reinforced hose cutter
- · Locking mechanism for safe storage

ASCOT NO. MFG. NO. 137-11420 A11-420

DESCRIPTION Red Handled Hose Cutter 137-11420

BLOW GUNS



ASCOT NO.	MFG. NO.	NOZZLE	DESCRIPTION
128-72021	272020SH	Venturi	High-output, OSHA-compliant
128-72022	27202SIL	Silent	Quiet, OSHA Compliant
128-72023	27202PRE	Standard	Standard, non-Scratch Nozzle
128-72024	27202ECR	Air Shield	Unique Air Shield Nozzle
128-72025	27202MTL	Metal	Durable Metal Nozzle



128-72025

128-72023

Air Line Couplers and Plugs

TYPE

1/4" LINCOLN LONG NOSE

• Brass plated couplers with hardened steel balls and stainless steel springs • Plugs heat-treated to reduce wear on critical mating surfaces • Interchange with Lincoln "Long Nose Series" as well as units produced by other manufacturers



ASCOT NO.	DILL. NO.	MILTON NO.	AMFLO. NO.	SCHRADER NO.	THREAD	NPT	
	COUPLERS						
131-61486	N/A	794	C27	598392	Male	1/4"	
131-61548	123	790	C28	506329	Female	1/4"	
	ADAPTER PLUGS						
131-61550	126	791	CP27	700665	Male	1/4"	
131-61551	125	792	CP28	700664	Female	1/4"	



1/4" ARO SERIES

• Brass plated couplers with hardened steel balls and stainless steel springs • Plugs heat-treated to reduce wear on critical mating surfaces • Interchange with Aro 210 series as well as units produced by other manufacturers • Maximum working pressure 300 PSI



ASCOT NO.	DILL. NO.	MILTON NO.	SCHRADER NO.	AMFLO. NO.	THREAD	NPT
COUPLERS						
131-61526	8888	775	506599	C38	Female	1/4"
131-61527	N/A	776	3525	C37	Male	1/4"
131-08888	Push-to- Connect	775	Dill 8888	Push-to- Connect	Female	1/4"
	ADAPTER PLUGS					
131-61529	8889	778	700757	CP38	Female	1/4"
131-61528	8891	777	700776	CP37	Male	1/4"

⚠WARNING: For more information go to www.P65Warnings.ca.gov.



1/4" AUTOMOTIVE STANDARD (TRU-FLATE)

• Brass plated couplers with hardened steel balls and stainless steel springs • Plugs heat-treated to reduce wear on critical mating surfaces • Interchange with Tru-Flate 10 and 100 type series as well as units produced by other manufacturers • Maximum working pressure 300 PSI



ASCOT NO.	DILL. NO.	MILTON NO.	AMFLO. NO.	SCHRADER NO.	THREAD	NPT
COUPLERS						
131-61523	D-13	785	C2	506079	Female	1/4"
131-61524	D-12	786	C1	506009	Male	1/4"
131-62523		D-	Female	1/4"		
	ADAPTER PLUGS					
131-61539	D-3C	784	CP2	700691	Female	1/4"
131-61538	D-2C	783	CP1	700735	Male	1/4"



1/4" INDUSTRIAL INTERCHANGE SERIES

• Brass plated couplers with hardened steel balls and stainless steel springs • Plugs heat-treated to reduce wear on critical mating surfaces • Interchange with Aro, Foster, Milton as well as units produced by other manufacturers • Maximum working pressure 300 PSI



ASCOT NO.	DILL. NO.	MILTON NO.	AMFLO. NO.	SCHRADER NO.	THREAD	NPT
COUPLERS						
131-61573	102	715	C20	506089	Female	1/4"
131-61574	103	716	C21	506249	Male	1/4"
	ADAPTER PLUGS					
131-61578	110	727	CP21	700677	Male	1/4"
131-61579	109	728	CP20	700688	Female	1/4"



1/2" TRUE-FLATE SERIES

- Brass plated couplers with hardened steel balls and stainless steel springs • Plugs heattreated to reduce wear on critical mating surfaces
- Maximum working pressure 300 PSI



133-61563			133-61471						
ASCOT NO.	DILL. NO.	MILTON NO.	AMFLO. NO.	SCHRADER NO.	THREAD	NPT			
	COUPLERS								
133-61563	D-17	1815	C10	503140	Female	1/2"			
133-61564	D-16	1816	С9	503104	Male	1/2"			
133-61471	D-17R	_	C10R	_	Female	1/2"			
		ADA	PTER PLU	JGS					
133-61569	D-3F	1818	CP10	700725	Female	1/2"			
133-61568	D-2F	1817	CP9	700626	Male	1/2"			
133-61474	D-0F	1819	CP9-03	3537	Male	3/8"			
133-01855	N/A	1855	N/A	1855	Male	1/4"			



3/8" AUTOMOTIVE SERIES

• Brass plated couplers with hardened steel balls and stainless steel springs • Plugs heat-treated to reduce wear on critical mating surfaces • Maximum working pressure 300 PSI



ASCOT NO.	DILL. NO.	MILTON NO.	AMFLO. NO.	SCHRADER NO.	THREAD	NPT
		C	OUPLERS			
132-61476	D-15C	1803	C8	502191	Male	1/4"
132-61478	N/A	1804	C7	502181	Female	1/4"
132-61553	D-15C	1805	C6	502141	Female	3/8"
132-61554	N/A	1806	C5	502105	Male	3/8"
		ADA	PTER PLI	JGS		
132-61481	D-1E	1810	CP8	700835	Female	1/4"
132-61480	D-0E	1809	CP7	700750	Male	1/4"
132-61559	D-3E	1808	CP6	700647	Female	3/8"
132-61558	D-2E	1807	CP5	700752	Male	3/8"
133-01855		1855				1/4"

1/4" RETREADER SERIES



ASCOT NO.	MILTON NO.	AMFLO NO.	SCHRADER NO.	DESCRIPTION
134-61544	779	CP12	700624	Female 1/4" NPT Steel Plug (.302-32 Std.)
134-61545	787	C2RB	_	Female 1/4" NPT Brass Coupler With Sleeve
134-61487	-	C2R	598390	Female 1/4″ NPT Steel Coupler
134-61552	781	61-552	3510	Female 1/4" NPT Plug (.482 - 26-3/4")
134-61543	_	CPI-302	510121	Male 1/4" NPT Plug (.302-32 inner & outer thread)

QUICK RELEASE COUPLER

- 1/4" female Reduces the chance of an accidental air line disconnect
- Double-click push button safety



ASCOT NO.	MFG. NO.	DESCRIPTION
131-00020	NSPQ-SF-20	Quick Release Coupler

FEMALE RECAP PLUG

- Case hardened steel, plated to resist rust
- MAXIMUM INLET PRESSURE: 300 PSI
- MAXIMUM TEMPERATURE: 250° F AIR FLOW: 40 SCFM • Equivalent to Milton 731



ASCOT NO.	MFG. NO.	DESCRIPTION
131-61531	731	M-Style Female Recap Plug: .305-32

HI-FLO/HVLP COUPLER

• Designed for air tools and paint spray equipment • Provides up to 50% more air flow than conventional couplers • Hi-Flo couplers/plugs for use with sanders, grinders and high air usage tools • HVLP couplers for use with paint spray guns



ASCOT NO.	MILTON NO.	AMFLO NO.	DESCRIPTION
135-00900	764	C90	1/4" FNPT Hi-Flo/HVLP Coupler-Brass
135-00910	765	C91	1/4" MNPT Hi-Flo/HVLP Coupler-Brass
135-00980	N/A	C98	1/4" FNPT Hi-Flo Coupler-Steel
135-00901	761-1	CP90	1/4" FNPT Hi-Flo Plug-Steel
135-00911	760-1	CP91	1/4" MNPT Hi-Flo Plug-Steel



319-03732



HYDRAULIC COUPLERS

• High-flow hydraulic coupler, 10,000 PSI working pressure





	155 10005		155 10000
ASCOT NO.	MFG. NO.	DESCRIPTION	

135-10605 PVV-38-M 3/8" Male Hose Half Coupler - For Hydraulic Rams 135-10606 PVV-38-F 3/8" Female Ram Half Coupler - For Hydraulic Rams

RUBBER DUST COVER FOR HYDRAULIC COUPLERS

• Hydraulic coupler dust cap • Used to keep dirt and debris from your hydraulic coupler when not connected • Made of a durable rubber material • Equipped with a pre-slit ring

to allow coupler to slide easily over the counter • Comes standard with 8' and 10' hydraulic hoses

ASCOT NO.	MFG. NO.	DESCRIPTION	
	1	1	

319-03732 03-RDC Rubber Dust Cover for Hydraulic Couplers

HYDRAULIC QUICK CONNECT COUPLER/PLUG

- 10,000 PSI maximum operating pressure
- Safety sleeve lock prevents accidental disconnection • Heavy duty back-up ring prevents o-ring extrusion • Heat treated and plated steel for greater wear and corrosion resistance • Self-sealing poppet valves provide excellent high and low pressure seating • Coupler equivalent to Parker TC-371, AME TC-371 & ESCO 10626 • Plug equivalent to Parker TC-372, AME TC-372 & ESCO 10625





ASCOT NO.	MFG. NO.	DESCRIPTION
135-11606	FD35-1001-0606	Hydraulic Quick Connect Coupler
135-12606	FD35-1002-0606	Hydraulic Quick Connect Plug

COMBO COUPLER®

• One coupler fits 1/4" Aro Style, 1/4" Automotive Standard and 1/4" Industrial Interchange plugs



⚠WARNING: For more information go to www.P65Warnings.ca.gov.

6124
6124

ASCOT NO.	MFG. NO.	SCHRADER NO.	MILTON NO.	DESCRIPTION
135-61240	C60	-	745	1/4" Series, 1/4" NPT Female
135-61241	C61	-	746	1/4" Series, 1/4" NPT Male

PARKER E-Z TO CONNECT/ DISCONNECT COUPLING

- E-Z-Mate is an exhaust type coupler designed to exhaust air pressure prior to disconnection
- Valve sleeve acts as integral shut-off valve
- Meets ISO 4414 requirements Built-in sleeve-lok mechanically locks the valve sleeve



131-17000

ASCOT NO.	MFG NO.	BODY SIZE	THREAD SIZE
	FEMAL	E COUPLERS	
131-02514	EZ-251-4FP	1/4"	1/4-18
131-02516	EZ-251-6FP	1/4"	3/4-18
132-03716	EZ-371-6FP	3/8"	3/8-18
132-03718	EZ-371-8FP	3/8"	1/2-14
133-05018	EZ-501-8FP	1/2"	1/2-14
133-05012	EZ-501-12FP	1/2"	3/4-14
133-75112	EZ-751-12FP	3/4"	3/4-14
133-75116	EZ-751-16FP	3/4"	1-11-1/2

ASCOT NO.	MFG NO.	BODY SIZE	THREAD	NPT
		NIPPLES		
131-17000	1857	1/2"	Male	1/2"
131-18000	1858	1/2"	Female	1/2"
133-17030	1859	1/2"	Male	3/8"



RPG 10-GALLON PORTABLE AIR TANK


• Perfect for emergency tire inflation • 125 PSI maximum pressure with manifold provides plenty of usable air for inflation tasks • 4' hose and ball foot air chuck makes it easier to get to hard to reach areas • Drain port included for regular draining to help eliminate rust and to help stop compressor generated water from flowing down the air line • Heavy duty steel gauge construction • Easyto-read steel pressure gauge • Rubber pads on feet • Powder coated finish



ASCOT NO.	MFG. NO.	DESCRIPTION
107-69101	91001ASC	RPG 10-Gallon Portable Air Tank
107-00125	NS125DM	Gauge & Valve Set for DDG 10-Gal Air Tank

RPG HIGH PERFORMANCE BLOW GUN KIT

- Produces more air flow than standard blow guns, fits any hose with 1/4" NPT thread, variable flow trigger provides precise control
- Maximum working pressure 120PSI
- Kit includes high performance blow gun, ultimate flow tip, rubber tip, quiet flow nozzle, 6" extension, 3" needle and reducer



DESCRIPTION

RPG 7-Piece High Performance Blow Gun Kit



PLEWS. **EDELMANN**

SOLID BRASS FEMALE CROSSES

• Excellent for running several air lines from a common supply hose



ASCOT NO.	MFG. NO.	NPT THREAD
136-00344	344X	1/4"
136-00366	366X	3/8"

136-00344

BRASS IN-LINE SWIVELS

• Simple design is excellent to stop hoses from kinking or for use in pneumatic equipment applications



ASCOT NO.	MFG. NO.	NPT THREAD	136-02366
136-02344	344R	1/4" Male/Female NPT	
136-02366	366R	3/8" Male/Female NPT	



SOLID BRASS FEMALE TEES

• Use to run two lines from a common feed



136-01366

ASCOT NO.	MFG. NO.	NPT THREAD
136-01344	655	1/4"
136-01366	655-1	3/8"

SOLID BRASS SWIVEL

• Simple design is excellent to stop hoses from kinking or for use in pneumatic equipment applications



136-34490

ASCOT NO.	MFG. NO.	NPT THREAD
136-34490	660	1/4" Male/Female Swivel

ILTOM INDUSTRIES, INC.

STANDARD BLOW GUN

· Compact blo-gun with safety & rubber tip

ASCOT NO. MFG. NO. 128-20000 148

DESCRIPTION Blo-Gun







Hose Adapters and Fittings



UNISWIVELS

• Features a full 360° swivel to keep hose from twisting when using air operated tools and while paint spraying



136-02366

ASCOT NO.	MFG. NO.	NPT THREAD
136-03344	\$657	1/4" NPTF x 1/4" NPTM

STANDARD MALE HOSE BARB FITTINGS

• Select fitting to match hose ID • Fittings must be secured to hose with either a hose clamp or crimped-on ferrule



ASCOT NO.	MFG. NO.	NPT THREAD	HOSE ID
136-00401	600	1/4"	1/4"
136-00604	604	3/8"	1/4"
136-00406	602	1/4"	3/8"
136-00606	603	3/8"	3/8"
136-00806	806	1/2"	3/8"
136-00408	408	1/4"	1/2"
136-00608	604	3/8"	1/2"
136-00808	604-1	1/2"	1/2"
136-71404	07001-0404	1/4"	1/4"
136-71504	07001-0504	5/16"	1/4"
136-71604	07001-0604	3/8"	1/4"
136-71606	07001-0606	3/8"	3/8"
136-71806	07001-0806	1/2"	3/8"
136-71808	07001-0808	1/2"	1/2"

TLTON INDUSTRIES, INC.

REUSABLE HOSE REPAIR FITTINGS

• Makes air tight connection without using hose clamps • Must closely match hose OD (outer diameter) and ID (inner diameter) accurately before ordering • Minimum order is box of ten

STANDARD FEMALE HOSE BARB FITTING





MALE PIPE THREAD



137-00621

HOSE ID	NPT
1/4"	1/4"
1/4"	1/4"

ASCOT NO.	MFG. NO.	HOSE OD	HOSE ID	NPT
137-00418	615-8	1/2"	1/4"	1/4"
137-00439	615	9/16"	1/4"	1/4"
137-00420	617	5/8"	1/4"	1/4"
137-00621	621	21/32"	3/8"	1/4"

FEMALE PIPE THREAD



137-01621

ASCOT NO.	MFG. NO.	HOSE OD	HOSE ID	NPT
137-01418	418F	1/2"	1/4"	1/4"
137-01439	439F	9/16"	1/4"	1/4"
137-01520	520F	5/8"	5/16"	1/4"
137-01621	621F	21/32"	3/8"	1/4"
137-01623	623F	23/32"	3/8"	1/4"
137-01624	624F	21/32"	3/8"	3/8"



HOSE SPLICERS

ASCOT NO.	MFG. NO.	HOSE OD	HOSE ID	
136-71405	07014-05	5/16"	5/16"	
136-71406	07014-06	3/8"	3/8"	
136-71408	07014-08	1/2"	1/2"	
136-71440	07014-04	1/4"	1/4"	
137-11520	520S	5/8"	5/16"	
137-11621	621S	21/32"	3/8"	
137-11623	623S	23/32"	3/8"	

MALE PIPE COUPLINGS

Solid Brass NPT





ASCOT NO.	MFG. NO.	MALE NPT	MALE NPT
137-00344	646	1/4"	1/4"
137-00346	643-1	3/8"	1/4"
137-00366	643-3	3/8"	3/8"
137-00388	647-2	1/2"	1/2"

PIPE COUPLING FEMALE NPT

Solid Brass

ASCOT NO.	MFG. NO.	MALE NPT
137-01344	643	1/4" x 1/4"

BUSHINGS AND ADAPTERS

Solid Brass





ASCOT NO.	MFG. NO.	MALE NPT	FEMALE NPT
136-61264	06120-0604	1/4"	3/8"
137-01324	650	1/4"	1/8"
137-01346	651	3/8"	1/4"
137-01348	651-1	1/2"	1/4"
137-01368	652	1/2"	3/8"
137-01389	652-8	3/4"	1/2"



BRASS FERRULES

• For use with hose barb fittings • Use with hose crimper (Ascot No. 137-08550) • QUANTITY: 50 per box

ASCOT NO.	MFG. NO.	FERRULE I.D.
137-73215	7321-50	.478"
137-73225	7322-50	.500"
137-73235	7323-50	.527"
137-73255	7325-50	.562"
137-73265	7326-50	.593"
137-73275	7327-50	.625"
137-73285	7328-50	.656"
137-73295	7329-50	.687"
137-73305	7330-50	.718"
137-73315	7331-50	.750"
137-73325	7332-50	.781"
137-73335	7333-50	.812"
137-73345	7334-50	.825"
137-73355	7335-50	.850"
137-39525	3952-50	.875"
137-50291	5029A-50	.900"
137-72421	7242A-50	.937"





STANDARD HOSE CRIMPER

• Provides production capability and "big tool" crimping advantages at a much lower cost • Heavy duty ductile iron casting and hardened steel dies for long service life and positive crimping • With five dies for crimping 1/4" single braid to 3/8" double braided hose



ASCOT NO.	MFG. NO.
137-08550	1626

DESCRIPTION Standard Hose Crimper





Clamps

OETIKER 2-EAR CLAMPS

• Especially suited for industrial or heavy vibrating equipment • Medium pressure clamp that is used for maintenance and OEM applications




ASCOT NO.	MFG. NO.	NOMINAL SIZE	INCHES CLOSED-OPEN	MM CLOSED-OPEN	INNER INCHES	WIDTH OF EAR
316-00507	507	1/4"	.197-276"	5-7 mm	.236"	6.0 mm
316-00709	709	5/16"	.276354"	7-9 mm	.276"	7.0 mm
316-00911	911	7/16"	.355433"	9-11 mm	.276"	7.0 mm
316-01113	1113	1/2"	.433512"	11-13 mm	.276"	7.0 mm
316-01315	1315	9/16"	.512591"	13-15 mm	.295"	7.5 mm
316-01517	1517	19/32"	-	-	_	_
316-01518	1518	5/8"	.591708"	15-18 mm	.315'	8.0 mm
316-01720	1720	3/4"	.669787"	17-20 mm	.335"	8.5 mm
316-01922	1922	13/16"	.748866"	19-22 mm	.354"	9.0 mm
316-02023	2023	7/8"	.787905"	20-23 mm	.354	9.0 mm
316-02225	2225	15/16"	.866984"	22-25 mm	.394"	10.0 mm
316-02327	2327	1"	.905-1.063"	23-27 mm	.394"	10.0 mm
316-03740	3740	1-1/2"	_	_	_	_





Position clamp on hose as illustrated.



Give each ear a firm squeeze with your OETIKER pincers.





Where access to ear is difficult, use OETIKER's side jaw pincers.

OETIKER 2-EAR CLAMP **SERVICE KIT**

 SERVICE KIT CONTAINS THE FOLLOWING SIZES: (15) 5/16"; (15) 7/16"; (15) 1/2"; (15) 9/16"; (12) 5/8"; (12) 3/4"; (12) 7/8"; (12) 15/16"; (12) 1"; and (1) pair straight jaw pincers

ASCOT NO.	DESCRIPTION
316-91098	Complete Kit
316-01098	Pincer Only



316-91098

PINCH CLAMPS

- Made from stainless steel
- Feature a specialized tonguein-groove design to provide a tight, secure seal • Tamper evident design • Ideal for both flexible and inflexible thin-walled hoses • Smooth-edged bandsteel design prevents damage to hoses





316-00102

ASCOT NO.	MFG. NO.	DESCRIPTION
316-00012	PEC12	1/2" Pinch Clamp
316-00058	PEC58	5/8" Pinch Clamp
316-00078	PEC78	7/8" Pinch Clamp
316-00716	PEC716	7/16" Pinch Clamp
316-00916	PEC916	9/16" Pinch Clamp
316-02332	PEC2332	23/32" Pinch Clamp
316-00102	CSC-102	Handheld Pinch Clamp Crimper



VEHICLE REPAIR SOLUTIONS



THE POWER YOU NEED. THE QUALITY YOU DESERVE.



Impact Wrenches (CP)

Sanders & Blue Tork (CP)

Air Ratchets (CP)

Buffers & Grinders (CP)

Air Drills (CP)

Air Tools & Accessories (RPG)

Impact Wrenches (IR)

Cordless Tools (IR)

Cordless Tools (Milwaukee)

Hammers, Grinders & Drills (IR)

Air Tool Lubricants & Conditioners

Accessories & Work Stations

⚠WARNING: For more information go to www.P65Warnings.ca.gov.

200L



Impact Wrenches

3/8" HEAVY DUTY AIR IMPACT WRENCH

• One hand push button forward/reverse power regulator

· Handle exhaust directs air away from the work area • 360° air inlet swivel prevents hose kinks • APPLICATIONS: general repair, transmission work, exhaust systems and body shops • ULTIMATE TORQUE: 200 ft./lb.

ASCOT NO. 152-00724

MFG. NO. CP724H

DESCRIPTION

3/8" Heavy Duty Air Impact Wrench



3/8" HEAVY DUTY AIR IMPACT WRENCH

• The most powerful 3/8" of its class for general maintenance • Maximize operator comfort with an extremely light and well balanced design • Most convenient and unique reverse technology in the market • ULTIMATE TORQUE: 415 ft./lb.

ASCOT NO. 152-07729

MFG. NO. CP7729

DESCRIPTION

3/8" Heavy Duty Air Impact Wrench

3/8" SUPER DUTY ANGLE IMPACT WRENCH

• High Durability • Compact • Powerful

• Comfort • Great Control • Easy operation • Single handed forward/ reverse operation • 3 positions in forward and 1 in reverse • 185 ft./lb. (250 Nm) of maximum torque in reverse



COMPACT & **POWFRFUI**

DESCRIPTION

3/8" Super Duty Angle Impact Wrench



ASCOT NO. MFG. NO. 152-07727

CP7727

1/2" SUPER DUTY ANGLE IMPACT WRENCH • High durability • Compact • Powerful

- Comfort Great control Easy operation
- Single handed forward/reverse operation • 3 positions in forward and 1 in reverse
- 220 ft./lb. (300 Nm) of maximum

torque in reverse

ASCOT NO. 153-07737

MFG. NO. CP7737

DESCRIPTION

1/2" Super Duty Angle Impact Wrench



153-07737

1/2" SUPER DUTY AIR IMPACT WRENCH • Tackle the tough jobs with the power and speed

of this true workhorse • Patented clutch provides smooth operation and extreme durability • One hand push button forward reverse

power regulator • 4 positive power settings in forward and ultimate power in reverse • Compact design with comfortable contoured handle • ULTIMATE TORQUE: 610 ft./lb.

ASCOT NO.	MFG. NO.	DESCRIPTION
153-07492	CP749	1/2" Impact Wrench
153-17492	CP749-2	2" Extended Anvil

1/2" HEAVY DUTY AIR IMPACT WRENCH

• One hand push button forward/reverse power regulator • 4 positive power setting

• Ultimate power in reverse • Differential regulator allows the operator to match the required power to the iob • Patented oil bath Dyna-Pact clutch delivers smooth operation and extended durability • Handle exhaust with 360° air inlet swivel to prevent kinks • Power and economy for general repair, transmission work, exhaust systems and body shops

• ULTIMATE TORQUE: 425 ft./lb.

MFG. NO. ASCOT NO. CP734H 153-00734

KIT INCLUDES: CP734H, (1) Set of 5 SAE Sockets: 1/2", 5/8", 3/4", 7/8", 15/16'







153-077748



1/2" SUPER DUTY AIR IMPACT WRENCH-TIRE TOOL

• Patented spring hammer clutch for smooth operation and extended durability . Low air consumption and high torque make this tool very efficient • ULTIMATE TORQUE: 665 ft./ lb. • Comfort and control with new ergonomic grip and trigger • SUITED FOR ALL MAINTENANCE APPLICATIONS: Light vehicle tire changing operations, light vehicle mechanical repair, MRO applications

ASCOT NO.	MFG. NO.	DESCRIPTION
153-00736	CP7736	1/2" Super Duty Air Impact Wrench - Tire Tool
153-07336	CP7736-2	2" Extended Anvil

1/2" DRIVE STUBBY IMPACT WRENCH

• BEST POWER TO WEIGHT RATIO: 450 ft./ lb. (610 Nm) • Ultra compact and easy to use • Durable with a steel front cover and aluminum body • One hand operation forward - reverse by either left or right-handed users • 3 setting positions • Jumbo hammer







The 1/2" Drive Stubby Impact Wrench in use.

ASCOT NO. MFG. NO. 153-07732 CP7732

DESCRIPTION

1/2" Drive Stubby Impact Wrench

1/2" SUPER **DUTY AIR IMPACT** WRENCH-TIRE TOOL

• 960 ft./lb. of torque (1,300 Nm) • Hard anodized end plates • Hard chromium aluminum cylinder • Twin hammer mechanism

· Lightweight due to the Composite motor housing • COMPACT: Only 6.6" long

 Curved handle with rubber material resistant to most chemicals used in workshops • Full teasing trigger • 360° swivel air inlet • Friction ring socket retainer



The 1/2" Super Duty Air Impact Wrench-Tire Tool in use.

153-77492

153-77482

ASCOT NO.	MFG. NO.	DESCRIPTION
153-07748	CP7748	1/2" Super Duty Air Impact Wrench-Tire Tool
153-77482	CP7748-2	2" Extended Anvil

1/2" HEAVY DUTY AIR IMPACT WRENCH

• Side-To-Side (S2S) forward/reverse functionality • Perfectly balanced to reduce strain on wrist and forearm • Twin hammer mechanism • ULTIMATE TORQUE: 955 ft./lb



CT CE	FEATURES S2S (SIDE- TO-SIDE)

ASCOT NO.	MFG. NO.	DESCRIPTION
153-07749	CP7749	1/2" Impact Wrench
153-77492	CP7749-2	2" Extended Anvil





Impact Wrenches (cont.)

3/4" HEAVY DUTY AIR IMPACT WRENCH

• Smoothest operating 3/4" impact on the market • One hand push button forward/reverse power regulator • Handle exhaust with 360° air inlet swivel • APPLICATIONS: spring work, truck and bus maintenance, farm machines & construction equipment • ULTIMATE TORQUE: 1,000 ft./lb.



3/4" HEAVY DUTY AIR IMPACT WRENCH

- Reduced Length at only 7.9" All controls within reach Variable speed trigger
- One-hand power adjustment One-hand reverse system 1440 ft./lb. (1950 Nm) of maximum torque • Composite motor housing • Twin



3/4" SUPER DUTY AIR IMPACT WRENCH - "D" HANDLE

• LIGHTWEIGHT: 3/4" at only 14.3 lb. • 1300 ft./lb. (1760 Nm maximum torque in reverse) • Twin hammer mechanism • Steel motor • Intuitive Forward/Reverse lever & power regulator on both sides • 4-position power settings on both sides • Side handle with soft-touch grip • Down exhaust . Aluminum housing . Composite cover on the



ASCOT NO.	MFG. NO.	DESCRIPTION
154-27763	CP7763D	1" Short Shank
154-37763	CP7763D-6	6" Extended Anvil

1" HEAVY DUTY AIR IMPACT WRENCH

- Chicago Pneumatic's strongest and most powerful 1" Impact Wrench Operator productivity • Convenient reverse valve • Ideal for high volume tire work on trucks, buses, and heavy equipment • 1" impact wrench with 7" extended anvil
- Rocking dog clutch 4-position power settings throttle for ease of use



ASCOT NO.	MFG. NO.	DESCRIPTION
155-50000	CP5000	7" Extended Anvil

1" SUPER DUTY AIR IMPACT WRENCH

• 14.5 lb. (6.6 kg) • Twin hammer mechanism • Steel motor • Intuitive forward/ reverse lever & power regulator on both sides • 4-position power settings on both sides • Side handle with soft touch grip • Down exhaust • Aluminum housing • Composite cover on the clutch housing • Socket retainer ring



ASCOT NO.	MFG. NO.	DESCRIPTION
155-07773	CP7773D	1" Short Shank
155-77736	CP7773D-6	6" Extended Anvil

1" HEAVY DUTY AIR **IMPACT WRENCH**

- High performance clutch provides longer life under tough conditions
- High-efficiency 6 vane motor for maximum performance Bottom exhaust directs exhaust away from the operator • Three-position power regulator with directional control • ULTIMATE TORQUE: 1,620 ft./lb.



155-07778	CP7778	1" Short Shank
155-77786	CP7778-6	6" Extended Anvil
155-27786	CP7778SP-6	#5 Spline with 6" Extended Anvil







1" Heavy Duty Air Impact Wrench



- Pinless closed reinforced rocking dog impact mechanism
- Socket retainer ring combined with hole retainer
- Ergonomic side handle
- · Full teasing trigger
- Regulator with integrated forward/reverse with 3-position power settings in both directions

ASCOT NO.	MFG. NO.	DESCRIPTION
155-07782	CP7782	1" Short Anvil
155-77826	CP7782-6	6" Extended Anvil
155-17782	CP7782-SP6	#5 Spline with 6" Extended Anvil

1" HEAVY DUTY AIR IMPACT WRENCH

- High Operator Comfort-Ergonomic D-Handle with full teasing trigger HIGH DURABILITY: Pinless closed reinforced rocking dog mechanism in oil bath • SHOCK ABSORBING: Rubber bumper protecting both applications and tool
- (included) POWERFUL AND LIGHT: 1770 ft./lb. (2400 Nm) in reverse



ASCOT NO.	MFG. NO.	DESCRIPTION
155-07783	CP7783	1" Short Shank
155-77836	CP7783-6	6" Extended Anvil

1" HEAVY DUTY AIR IMPACT WRENCH

• LIGHTWEIGHT: Only 6.9 lb. (3.15 kg) thanks to a composite motor housing for an improved operator comfort • Socket retainer ring combined with hole retainer • Twin hammer mechanism • ALL CONTROLS WITHIN REACH: Variable speed trigger, One-hand power adjustment, One-hand reverse system • 360° swivel air inlet • 1440 ft./lb. (1950 Nm in reverse)

ASCOT NO.	MFG. NO.	DESCRIPTION
155-07779	CP7779	1" Impact Wrench
155-17779	CP7779-6	6" Extended Anvil

1" SUPER DUTY AIR **IMPACT WRENCH**

· Rocking dog clutch for smooth operation

and extreme durability

⚠WARNING: For more information go to www.P65Warnings.ca.gov.

- Teasing throttle for easy bolt starting
- Convenient reverse valve for easy directional changes Choice of professional mechanics for high volume tire work on trucks, buses and heavy equipment • ULTIMATE TORQUE: 1,400 ft./lb.

ASCOT NO.	MFG. NO.	DESCRIPTION
155-07971	CP797	1" Short Shank
155-07976	CP797-6	6" Extended Shank
156-79716	CP797SP-6	6" Extended Shank and #5 Spline



MFG. NO.	DESCRIPTION
CP797	1" Short Shank
CP797-6	6" Extended Shank
CP797SP-6	6" Extended Shank and #5 Spline
	CP797 CP797-6



Sanders & Blue Tork

HEAVY DUTY HIGH-SPEED SANDER

• Built-in regulator and variable speed throttle for precise speed control • Rugged, energy efficient 1/2 HP motor • APPLICATIONS: Ideal for small jobs or hard to reach spots including paint removal, shaping filler patches, smoothing and rust removal • FREE SPEED: 14,000 RPM



MINI DISC SANDER KIT

• KIT INCLUDES: CP7202 Mini Disc Sander plus (1) 3" backing pad, (10) 3" 80, 100 & 120 grit sanding discs, (1) 3" fine, medium and coarse surface prep disc & a spindle wrench packed in a heavy duty carrying case • FREE SPEED: 15,000 RPM



158-07202

ASCOT NO. 158-00778

MFG. NO. CP9778

DESCRIPTION

Heavy Duty High-Speed Sander

ASCOT NO. MFG. NO. DESCRIPTION 158-07202 CP7202D Mini Disc Sander Kit



1" Non-Impact Wrench (Blue Tork)

- Two pneumatic motors for rundown and final tightening
- Preset and adjustable shut off for torque control
- QUALITY: Precise, accurate tightening to the manufacturer's recommended torque and angle specifications
- ENVIRONMENT IMPROVEMENTS: by increasing durability of the tools, we reduce waste
- ERGONOMICS: very low noise level, virtually no vibration

- **EFFICIENCY: Precise and accurate** tightening, less fatigued operators
- MAXIMUM TORQUE: 660 ft./lb.

ASCOT NO. MFG. NO. DESCRIPTION	
168-07600 CP7600xB Non-Reversible Sing	le Torque Preset
168-07602 CP7600xB-R Reversible Single To	rque Preset
168-07603 CP7600xB-R4P Reversible 4 Torque	Preset Selector





Air Ratchets

QUICK REFERENCE CHART

CP No.	Ascot No.	Sq. Drive (mm)	Std Bolt Size (mm)	Net Wt. (kg)	Avg Air Cons. (CFM)	Air Inlet (in.)	Min. Hose Size (in.)	Working Torque (ft./lbs.)	Max Torque (ft./lbs.)
CP826	151-00826	1/4" (6)	1/4" (6)	1.13 (0.51)	3.5	1/4"	3/8" (10)	5-15 (7-20)	15 (20)
CP828	151-00828	3/8" (10)	3/8" (10)	2-5/8 (1.2)	4	1/4"	3/8" (10)	10-50 (14-68)	50 (68) 150 RPM
CP7829	152-07829	3/8" (10)	3/8" (10)	1.235 (2.72)	4	1/4"	3/8" (10)	10-55 (15-68)	95 (70)
CP7830Q	152-07830	3/8" (10)	3/8" (10)	2.7 (1.2)	5 (142)	1/4"	3/8" (10)	10-90 (14-136)	90 (122)

1/4" SUPER DUTY AIR RATCHET

· Exceptional durability with an advanced head design that virtually eliminates slippage • Urethane grip for comfort and control • Faster rundown with 250 RPM • APPLICATIONS: Under-dashboard work, small engine repair and body shops • ULTIMATE TORQUE: 15 ft./lb.



ASCOT NO.	MFG. NO.	DESCRIPTION
ASCUT NU.	MFG. NO.	DESCRIPTION

CP826 1/4" Super Duty Air Ratchet 151-00826

3/8" HEAVY DUTY AIR RATCHET

· Advanced motor, full caged gear, and head design • Only 10.7in / 272mm long • Better access to restricted areas • 2.7 lb. / 1.2 kg • Adjustable side exhaust avoids blowing dirt and dust • Ergonomic composite grip insulates operator's hand from cold • Designed for a variety of applications from heavy ones such as transmission and suspension work to light ones such as engine repair, dashboard work and general maintenance • ULTIMATE TORQUE: 70 ft./lb.



ASCOT NO.	MFG. NO.	DESCRIPTION
152-07829	CP7829	3/8" Heavy Duty Air Ratchet
153-07829	CP7829H	1/2" Heavy Duty Air Ratchet

3/8" EXTREME DUTY AIR RATCHET

• Adjustable side exhaust • LOW NOISE LEVEL: Only 79 dBA • One of the highest torques available on the market • CP's Patented TriSpring anti-slip head design

ASCOT NO.	MFG. NO.	DESCRIPTION	152-07830
152-07830	CP7830Q	3/8" Super Duty Rato	net
153-07830	CP7830HQ	1/2" Super Duty Ratch	net

3/8" QUIET AIR RATCHET

• APPLICATIONS: exhaust systems, small engines, water and fuel pumps and radiator and air conditioner removal and replacement

• New advanced, patented head design • Patented ergonomic square-handle design for a comfortable grip • Efficient 1/2 HP motor and triple idler planetary gear system • ULTIMATE TORQUE: 50 ft./lb.

ASCOT NO.	MFG. NO.	DESCRIPTION	152-00828
152-00828	CP828	3/8" Quiet Air Ratchet	
153-08281	CP828H	1/2" Quiet Air Ratchet	



The 3/8" Air Ratchet in use.



Needle Scaler, Cutter, Tire Buffers

NEEDLE SCALER

- Ideal for surface preparation work
- · Adjustable sleeve allows needle clearance based on the application • 19 1/8" steel needles with high resistance to wear
- · Easily converts to a weld flux chipping hammer • BLOWS PER MINUTE: 4,800

ASCOT NO.
157-07120

MFG. NO. CP7120

DESCRIPTION Needle Scaler



HIGH SPEED CUTTER

· Adjustable speed regulator for precise control • Lock off throttle to prevent accidental start up • Rear exhaust directs air away from work area • MAX RPM: 22,000



LOW SPEED TIRE BUFFER KIT

· Quick change slip chuck for fast and easy change of buffing wheel • Adjustable speed regulator for precise control • Lock off throttle to prevent accidental start ups • Rear exhaust directs air away from work area • 2,800 RPM





· Jacobs chuck for holding buffing accessories • Lock-off throttle • APPLICATIONS: tire patchwork, roughing areas for recapping and cleaning tire moldings

• FREE SPEED: 22.000 RPM



158-00873

ASCOT NO.	MFG. NO.	DESCRIPTION
158-00871	CP871K	Includes Over Hose
158-01871	CP871	High Speed Tire Buffer Only

Grinders & Surface Conditioning Discs

157-00874

2" QUICK CHANGE SURFACE CONDITIONING DISCS

• Embedded with abrasive grain to eliminate fraying of edges, resist loading and provide a consistent finish • Ideal for flat or contoured surfaces • APPLICATIONS: Light deburring, surface preparation, blending scratches, removing rust, corrosion and oxidation, removing stains from stainless steel, finishing aluminum and stainless steel • Available in fine, medium or coarse

ASCOT NO.	MFG. NO.	DESCRIPTION
417-39120	3912BLUEF	2" Quick Change Surface Conditioning Discs: Blue (Fine)
417-39121	3912MARNM	2" Quick Change Surface Conditioning Discs: Maroon (Medium)
417-39122	3912BRWNC	2" Quick Change Surface Conditioning Discs: Brown (Coarse)
417-39202	392002	Backing Pad for 2" Surface Conditioning Discs





417-16210

Grinders & Surface Conditioning Discs (cont.)

GREEN ZIRCONIA DISCS

• Twist-to-lock backing • Offers longer life and more aggressive results than zirconia or aluminum oxide • Flexible discs resist chipping, snagging and cracking • For use on air grinders and are compatible with all 3M style, Type "R" backing pads • Especially good on extra hard metals • 20,000 RPM • 25 per box

ASCOT NO.	MFG. NO.	DESCRIPTION
417-12612	12612	2" Disc, 24 Grit (25 per box)
417-12613	12613	2" Disc, 36 Grit (25 per box)
417-12614	12614	2" Disc, 50 Grit (25 per box)
417-12615	12615	2" Disc, 80 Grit (25 per box)
417-12616	12616	3" Disc, 24 Grit (25 per box)
417-12617	12617	3" Disc, 36 Grit (25 per box)
417-12618	12618	3" Disc, 50 Grit (25 per box)
417-12619	12619	3" Disc, 80 Grit (25 per box)



2" SURFACE **CONDITIONING DISCS**

• Best used on aluminum parts • USA MADE • QUANTITY: 25 per box • MAXIMUM **OPERATING SPEED: 25,000**



	QTY./BOX

ASCOT NO.	MFG. NO.	DESCRIPTION	QTY./BOX
417-13003	620TE-1	2" Conditioning Discs: Brown (Coarse)	25
417-13004	622TE-1	2" Conditioning Discs: Maroon (Medium)	25
417-13005	620TE-1-50	2" Conditioning Discs: Brown (Coarse)	50

MINI ANGLE DIE GRINDER

· Compact, lightweight design for easy maneuverability

• 90° angle head allows flexibility in confined areas • Complete with 1/4" and 6mm collet

• APPLICATIONS: high speed blending, smoothing, porting, and deburring in confined areas • MAX RPM: 22,500

ASCOT NO.	MFG. NO.	DESCRIPTION
157-00875	CP875	Mini Angle Die Grinder



• Compact, lightweight design for easy maneuverability • Adjustable speed regulator for precise control • Complete with 1/4" and 6mm collet • APPLICATIONS: high speed blending, smoothing, porting, and deburring in confined areas • MAX RPM: 30,000

ASCOT NO. MFG. NO. DESCRIPTION 157-00876 CP876 Mini Die Grinder



• Used for paint or coating removal • Features the quick and easy twist-to-lock attachment system • Open-web construction impregnated with silicon carbide to provide aggressive and long-lasting performance • Threedimensional web has a soft edge, allowing it to remove paint and other coatings in those unreachable creases and dents while removing very little metal • Ideal for stripping paint without damaging metal, especially on aluminum • QUANTITY: 10 per Box

ASCOT NO.	MFG. NO.	DESCRIPTION	
417-16210	16210	Purple 2" Strip-Brite Pad	
417-16211	16211	Purple 3" Strip-Brite Pad	

PROFESSIONAL STUD/HUB BRUSH KIT

- Ideal for hub and stud cleaning job with ease QUICK AND EASY: Change brushes in seconds • Includes a 1/2" drive adapter
- Powered by a cordless drill Replacement brushes available



402-32613

ASCOT NO.	MFG. NO.	DESCRIPTION
402-32610	203610-ASC	Stud/Hub Brush Kit

ASCOT NO.	MFG. NO.	DESCRIPTION

REPLACEMENT COMPONENTS FOR STUD/HUB BRUSH KIT							
	402-32611	203611-ASC	Plastic Hub/Stud Tool & Adapter				
	402-32613	203613-ASC	4-Pack of Replacement 14mm Stud Brushes				
	402-32614	203614-ASC	4-Pack of Replacement 22mm Stud Brushes				
	402-32615	203615-ASC	4-Pack of Replacement Passenger Hub Brushes				
	402-32616	203616-ASC	4-Pack of Replacement Truck Hub Brushes				



157-00876

Drills



1/4" REVERSIBLE MINI AIR DRILL

- · Composite housing with thermoplastic rubber handle grip
- · Wings on right & left sides to guide the forefinger • Large teasing trigger and progressive valve allowing more control to start holes • Low speed gear box
- · Flat back part for better pushing action while drilling and tapping • Reverse lever on the top for easier access • Handle exhaust allowing the air to flow away from the operator • Supplied with high quality industrial Jacobs® chucks for longer use • keyed Metal • APPLICATIONS: Excellent for drilling, honing, reaming and hole sawing • FREE SPEED: 3,300 RPM

ASCOT NO. MFG NO 157-07302 CP7300RC DESCRIPTION

1/4" Reversible Mini Air Drill

157-07302

1/4" MINI AIR DRILL

· Composite housing with thermoplastic rubber handle grip • Wings on right & left sides to guide the forefinger • Large teasing trigger and progressive valve allowing more control to start holes • Low speed gear box • Flat back part for better pushing action while drilling and tapping • Handle exhaust allowing the air to flow away from the operator • Supplied with high quality industrial Jacobs® chucks for longer use • keyed Metal • APPLICATIONS: Excellent for drilling, honing, reaming and hole sawing • FREE SPEED: 3,300 RPM

ASCOT NO. 157-17302

MFG. NO. CP7300C

DESCRIPTION 1/4" Mini Air Drill



157-17302

3/8" REVERSIBLE DRILL

- Teasing throttle for precise control
- APPLICATIONS:

Screwdriving, honing and heavy drilling • FREE SPEED: 2,600 RPM



ASCOT NO. MFG. NO. DESCRIPTION CP789-R26 157-78926 3/8" Reversible Drill

157-78926

3/8" REVERSIBLE ANGLE DRILL

• Composite housing with thermoplastic rubber handle grip • Lock-off throttle for more controlled BUILT-IN applications • Built-in Forward-FORWARD-Reverse ring • Compact low **REVERSE** profile head to get into confined spaces • Handle exhaust allowing the air to flow away from the operator. Supplied with high quality industrial Jacobs® chucks for longer use • APPLICATIONS: Excellent for drilling and screw driving in confined areas • FREE SPEED: 2,000 RPM



157-01879

ASCOT NO. 157-01879

MFG. NO. CP879C

DESCRIPTION 3/8" Reversible Drill



1/2" REVERSIBLE DRILL • Teasing throttle for precise control

• APPLICATIONS: heavy drilling, reaming, hole sawing and jobs requiring a lot of torque • FREE SPEED: 500 RPM

ASCOT NO. 157-00789

MFG. NO. CP789-HR


DESCRIPTION 1/2" Reversible Drill





Air Tool Accessories

HAMMER ACCESSORIES

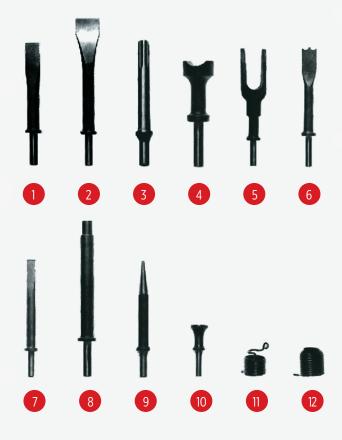

NDEX NO.	ASCOT NO.	MFG. NO.	DESCRIPTION
1	171-47050	A-047050	Rivet Cutter
2	171-47051	A-047051	Wide Cutting Chisel
3	171-47052	A-047052	Bushing Splitter
4	171-47057	A-047057	U-Joint & Tie Rod Tool
5	171-47059	A-047059	1" Separator Fork
5	171-47061	A-047061	1-1/4" Separator Fork
6	171-47071	A-047071	Twin Blade Cutter
7	171-47073	A-047073	Cold Chisel
8	171-47074	A-047074	Straight Punch
9	171-47078	A-047078	Tapered Punch
10	171-47091	A-047091	1-1/4" Smoothing Hammer
11	171-47095	A-047095	Quick-Change Retainer
	171-47096	A-047096	Bee-Hive Retainer
10	171-47270	CA-047270	2' Leader Hose
12	171-47300	CA-047300	Quick Change Coupler
	171-47032	CA-047302	Nipple

▲WARNING: For more information go to www.P65Warnings.ca.gov.





RPG 1" DRIVE & #5 SPLINE SUPER DUTY AIR IMPACT WRENCH

- 6" extended anvil
- Steel end plates
- WORKING TORQUE RANGE: 1,600-1,800 ft./lb.
- FREE SPEED: 4,500 RPM
- MAXIMUM TORQUE: 1,800 ft./lb.

RPG 1" DRIVE MINI PLUS AIR IMPACT WRENCH

- 6" extended anvil
- 3-position power setting
- Rubber-coated side handle for added comfort
- Powered by the twin hammer clutch
- FREE SPEED: 5,000 RPM
- MAXIMUM TORQUE: 2,000 ft./lb.

RPG 1" & #5 SPLINE DRIVE SUPER DUTY IMPACT WRENCH

- 6" extended anvil
- 3-position forward and reverse
- High efficiency 6-vane motor
- Swoop-back side handle for maneuverability and balance
- Pinless clutch mechanism
- WORKING TORQUE RANGE: 1,800-2,000 ft./lb.
- FREE SPEED: 5,000 RPM
- MAXIMUM TORQUE: 2,000 ft./lb.

IMPACT WRENCH SPECIFICATIONS

ASCOT NO.	MFG. NO.	SQUARE DRIVE	FREE SPEED (RPM)	MAX TORQUE (FT./LB.)	AIR PRESSURE (PSI)	AIR CON. AVG (CFM)	AIR INLET (NPT)	HOSE SIZE	LENGTH	WEIGHT (LB.)
155-12856	A2856	1"	5,000	2,000	_	12	1/2"	3/4"	20.5"	27.6
155-17786	A778-6	1"	4,500	1,800	90	8.4	1/2"	3/4"	20.3"	26.59
155-26464	A26464	1"	5,000	1,800	90	9	1/2"	3/4"	19.2"	17.86
156-12856	A2856SP	#5 Spline	5,000	2,000	_	12	1/2"	3/4"	20.5"	27.6
156-17786	A778SP-6	#5 Spline	4,500	1,800	90	8.4	1/2"	3/4"	20.3"	26.59







RPG 1/2" DRIVE SUPER DUTY AIR IMPACT WRENCH

- 2" extended anvil
- FREE SPEED: 8000 RPM
- MAXIMUM TORQUE: 600 ft./lb.
- Proven design and the most popular configuration in the tire service
- Powered by the durable and high performing twin hammer mechanism
- · Handle exhaust

RPG 1/2" DRIVE COMPOSITE IMPACT WRENCH W/ EXTENDED ANVIL

- Convenient one-hand operated forward/reverse push button
- · Four-setting torque adjustment switch
- Compact with a total length of only 7.2"
- Twin hammer mechanism provides smooth balance
- Feather trigger for precise speed control
- Energy efficient motor for maximum performance & long life
- Swivel air inlet prevents hose from twisting



IMPACT WRENCH SPECIFICATIONS

ASCOT NO.	MFG. NO.	SQUARE DRIVE	FREE SPEED (RPM)	MAX TORQUE (FT./LB.)	AIR PRESSURE (PSI)	AIR CON. AVG (CFM)	AIR INLET (NPT)	HOSE SIZE	LENGTH	WEIGHT (LB.)
153-12260	A2131-2COMP	1/2"	7,500	685	90	5	1/4"	3/8"	7.2"	4.5
153-23120	A2312	1/2"	8,000	600	90	4	1/4"	3/8"	8-1/8"	5.6
153-23121	SS-A2312	1/2"	8,000	600	90	4	1/4"	3/8"	6.1"	5.9





RPG Parts & Accessories



175-10026







ASCOT NO. MFG. NO. DESCRIPTION

REPLACEMENT PARTS FOR A778-6 1" DRIVE IMPACT WRENCH				
175-10026	#26	Set of 6 Rotor Blades for A778- 6 1" Drive Impact Wrench		
175-10037	#37	Hammer for A778-6 1" Drive Impact Wrench		
175-10040	#40	Hammer Cage for A778-6 1" Drive Impact Wrench		
175-10043	#43	Replacement Side Handle Kit for A778- 6 1" Drive Impact Wrench		
176-18406	A778-6TK	Tune-Up Kit for A778-6 1" Drive Impact Wrench		





175-18406



ASCOT NO.	MFG. NO.	DESCRIPTION
175-23104	JB-04Blue	Blue Protective Boot for RPG A2312 Impact Wrenches
175-82651	H-082651	1" Impact Wrench Retainer Clip O-Ring
175-83071	P-08371	O-Ring for 1/2" Impact Wrench Retainer Clips





RPG LOW SPEED TIRE **BUFFER WITH QUICK CHANGE SLIP CHUCK**

- Brass bushings provide performance and durability in tough working conditions
- Includes whip hose and exhaust hose
- Quick change slip chuck for fast and easy change of buffing wheel • Built-in regulator • Lock off throttle to prevent accidental start ups • Rear exhaust directs air away from the work area • Ideal for patchwork, roughing areas for recapping and cleaning tire moldings • Overhose Kit also Available Separately (175-00873)





RPG HIGH SPEED TIRE BUFFER WITH **OVERHOSE KIT**

• Jacobs chuck for holding buffing accessories • Lock-off throttle • FREE SPEED: 22,000 RPM • APPLICATIONS: Tire patchwork, roughing areas for recapping and cleaning tire moldings • Includes overhose kit



RPG HIGH SPEED BUFFER KIT WITH QUICK **CHANGE CHUCK**

• Quick change chuck for holding buffing accessories • Lock-off throttle • FREE SPEED: 22,000 RPM • APPLICATIONS: Tire patchwork, roughing areas for recapping and cleaning tire moldings • Includes overhose kit







Quick Chuck Adapter

For 5/16" Shank

ASCOT NO.	MFG. NO.	DESCRIPTION
REPLACE	MENT PARTS	FOR AIR BUFFERS
175-00873	A-873K-OH	Overhose Kit for Tire Buffers
175-18713	A8713-TA	Trigger Assembly for Tire Buffers
175-28713	SQC01	Replacement 7/16" Quick Change Slip Chuck
ACCE	SSORIES FOR	AIR BUFFERS
173-00018	QC18	Quick Chuck Adapter W/ Collar
173-00019	QC19	Quick Chuck Adapter
	QCIS	W/ Spacer, 1" x 3/8" Thread
173-00020	QC20	W/ Spacer, 1" x

TIRE BUFFER SPECIFICATIONS

ASCOT NO.	MFG. NO.	DESCRIPTION	FREE SPEED (RPM)	LENGTH
158-10873	A873K	Low Speed Tire Buffer with Quick Change Chuck	2,800	1.75"
158-10871	A871K	High Speed Tire Buffer with Overhose kit	22,000	2.5"
158-11871	A871K-QC	High Speed Buffer Kit with Quick Change Chuck	22,000	1.75"

▲WARNING: For more information go to www.P65Warnings.ca.gov.

173-00023


QC23



RPG 1/2" REVERSIBLE AIR DRILL

RPG 1/4" AIR SCREWDRIVER









PARTS & ACCESSORIES

ASCOT NO. MFG. NO. DESCRIPTION

REPLACEMENT PARTS FOR 1/2" REVERSIBLE AIR DRILL				
175-01035	253340	Side Handle Kit for A1035 Air Drill		
175-11035	H025	Air Hose Exhaust Kit for A1035 Air Drill		



AIR TOOL SPECIFICATIONS

ASCOT NO.	MFG. NO.	FREE SPEED (RPM)	AIR PRESSURE (PSI)	AIR CON. AVG (CFM)	AIR INLET (NPT)	HOSE SIZE	LENGTH	WEIGHT (LB.)
157-01035	A1035	500	90	4	1/4"	3/8"	7.5"	2.86
157-01038	A1038	2,200	90	6	1/4"	3/8"	8"	2.42



RPG 3"CUT-OFF TOOL

• Adjustable speed regulator for precise control • Lockoff throttle to prevent accidental start-up • Rear exhaust directs air away from work area • Durable gears for top performance and long life • FREE SPEED: 22,000 RPM



RPG 1/4" MINI ANGLE DIE GRINDER

- Compact, lightweight design for easy use APPLICATIONS: High speed blending, smoothing, porting and deburring in confined areas
- Right angle for easy maneuvering FREE SPEED: 22,000 RPM



RPG WHEEL WEIGHT ADHESIVE REMOVAL TOOL

• High torque motor to cut through stubborn wheel weight adhesive, body pinstripes, etc. • High RPM to prevent pad from bogging down • Pad made of a tough and long-lasting material • Rubberinsulated motor housing for hand comfort • Lock-off trigger for added safety • Includes eraser pad • SPINDLE THREAD: 5/16"-24



ASCOT NO. MFG. NO. DESCRIPTION

REPLACEMENT PARTS FOR WHEEL WEIGHT ADHESIVE TOOL

157-03253 A143252-6 Replacement Eraser Pads for Wheel Weight

Adhesive Removal Tool (6 per Package)



AIR TOOL SPECIFICATIONS

ASCOT NO.	MFG. NO.	FREE SPEED (RPM)	AIR PRESSURE (PSI)	AIR CON. AVG (CFM)	AIR INLET (NPT)	HOSE SIZE	LENGTH	WEIGHT (LB.)
157-03252	A143252	3,700	90	4	1/4"	3/8"	7.9"	1.8
157-10874	A874	22,000	90	5	1/4"	3/8"	7.25"	1.75
157-10875	A875	22,000	90	5	1/4"	3/8"	5"	1

⚠WARNING: For more information go to www.P65Warnings.ca.gov.



Impact Wrenches

1/2" Super Duty Air Impact Wrench

- Most popular tool in its class
- Offers the sheer power and performance features to tackle the toughest of jobs
- Durable and economical
- TORQUE RANGE: 25-350 ft./lb.

ASCOT NO.	MFG. NO.	DESCRIPTION
153-00231	IR-231HA	Standard Anvil
153-02312	IR-231HA-2	Extended Anvil



1/2" SUPER DUTY AIR IMPACT WRENCH

· APPLICATIONS: For tire-changing, shock and spring work, front-end work and other heavy automotive and truck work • Pumps out 500 ft./lb. of torque at a free speed of 7.000 RPM • IR-244A-2 with a two-inch extended anvil for use with flip sockets

ASCOT NO.	MFG. NO.	DESCRIPTION
153-00244	IR-244A	Standard Anvil
153-02442	IR-244A-2	Extended Anvil

1/2" ULTRA **DUTY TITANIUM AIR** IMPACT WRENCH

• Titanium weighs less and provides greater durability • Enhanced Twin Hammer mechanism for fast removal of frozen bolts • Push button forward/reverse controls for one-handed operation • TORQUE RANGE: 50-600 ft./lb., 625 ft./lb.

max (forward)), 700 ft./lb. max (re	verse)
ASCOT NO.	MFG. NO.	DESCRIPTION
153-02235	IR-2235TiMAX	Standard Anvil
153-12235	IR-2235TiMAX-2	2" Extended Anvil
153-32235	IR-2235QTiMAX	Quiet Version
153-22235	IR-2235QTiMAX-2	Quiet Version with 2" Extended Anvil
153-42235	IR-2235TiMAX-2	2" Extended Anvil

1/2" SUPER DUTY AIR IMPACT WRENCH

• Punish the toughest bolts with 780 ft./lb. of max reverse torque and 1,100 ft./lb. of nut-busting torque, all powered by Ingersoll Rand's finely tuned motor and twin-hammer impact mechanism • At only 4.3 pounds, the 2135QXPA is as light as

it is powerful so your hand tires less, letting you get more work done • Ingersoll Rand's Quiet Technology reduces the sound of the tool, sparing your ears without sacrificing a single ounce of power

ASCOT NO.	MFG. NO.	DESCRIPTION
153-22135	IR-2135QXPA	Standard Anvil
153-32135	IR-2135QXPA-2	Extended Anvil

3/4" SUPER DUTY AIR IMPACT WRENCH

• Non-biased motor delivers 1,050 ft./ lb. of maximum torque in both forward and reverse • Two power settings in forward and reverse • Variable speed trigger • Lighter than other 3/4" impacts in its class • Handle-vented exhaust directs air away from the operator • Silenced exhaust reduces tool noise while in use

ASCOT NO. MFG. NO. DESCRIPTION IR-259 154-00259 3/4" Super Duty Air Impact Wrench



153-12235





(IR) Ingersoll Rand

3/4" SUPER DUTY AIR **IMPACT WRENCH**

• Powerful 3/4" wrench • Combines compact size with high output • Ideal for everything from spring work to pinion nut and track pad removal and major engine teardowns • Jumbo hammer mechanism delivers up to 1,100 ft./ lb. of torque smoothly, with less vibration

ASCOT NO.	MFG. NO.	DESCRIPTION
154-00261	IR-261	Standard Anvil
154-02613	IR-261-3	3" Extended Anvil
154-02616	IR-261-6	6" Extended Anvil



1" HEAVY DUTY AIR IMPACT WRENCH


• Improved 1" drive tool perfect for truck and heavy equipment maintenance • Offers power and convenience at an affordable price

· Compact, lightweight and perfect for working on suspension components

• TORQUE RANGE: 100-1000 ft./lb.

ASCOT NO.	MFG. NO.	DESCRIPTION	
155-00295	IR-295	Standard Anvil	
156-02951	IR-295-S	#5 Spline Drive	

3/4" MAXIMUM IMPACT AIR IMPACT WRENCH



enough to access tight spa and designed to withstan rugged environments • Ai 16% more efficient than its and an easy-to-clean inlet less downtime, better tool and less money spent on compressed air

• TORQUE RANGE: 200-900 ft./lb.

Air Impact Wrench everse torque from 4 lb. and is compact	10 minutes
paces • Built to last and tough use in an air motor that's	G
ts predecessor at screen means of performance,	154-22145
, perioritaries,	

ASCOT NO.	MFG. NO.	DESCRIPTION
154-12145	IR-2145QiMAX	Standard Anvil
154-22145	IR-2145QiMAX-3	3" Extended Anvil
154-32145	IR-2145QiMAX-6	6" Extended Anvil

3/4" ULTRA DUTY AIR IMPACT WRENCH

· Offers all of the ergonomic, power and durability enhancing features as the IR-2161 but with a 6" extended anvil for those hard to reach applications • Jumbo hammer mechanism • Up to 1,200 ft./lb. of torque • Trouble-free, longer performance aided by the pressure-feed lube system • Compact and only 7-5/8" long • Handle exhaust 154-21617

⚠WARNING: For more information go to www.P65Warnings.ca.gov.

ASCOT NO. MEG NO DESCRIPTION 154-21617 IR-2161XP-6 3/4" Ultra Duty Air Impact Wrench

1" D-HANDLE IMPACT WRENCH

• SOLID STEEL IMPACT MECHANISM: Deliver 2,100 ft./lb. of torque • HIGHLY ENGINEERED DESIGN: Delivers the power you need over the life of the tool • STEEL CORE DESIGN: Nothing's been proven to last longer • CHEMICAL RESISTANT HOUSING & STEEL CORE: Stands up to drops and harsh work environments • LIGHTWEIGHT: 25% lighter than the industry's leading 1" wrench • 360° ADJUSTABLE HANDLE: The side handle rotates fully around the tool as the job demands • SWIVEL HOSE CONNECTION: Keeps cords from getting tangled so you can move freely around the garage • 6" ANVIL EXTENSION: Increases accessibility in hard to reach places







Impact Wrenches (cont.)



- · Combines exceptional power, durability and operator convenience
- Delivers 1450 ft./lb. of maximum torque at 90 psi (1770 ft./lb. max torque at 120 psi) with a 5000 RPM free speed and four-position regulator 360° swivel inlet
- Chemical resistant boot
- Available in 6" extended anvil and 6" extended #5 spline anvil A1:089 or high production truck tire changing

ASCOT NO.	MFG. NO.	DESCRIPTION	
155-28560	IR-285B	Standard Anvil	
155-02856	IR-285B-6	6" Extended Anvil	
156-28566	IR-285BS-6	#5 Spline Super Duty Apvil	

155-02856

1" SUPER DUTY AIR IMPACT WRENCH • 1" drive wrench with 1,000 ft./lb. torque to handle tough jobs in cramped spaces • Built-in pressure-feed lube system, adjustable side handle and built-in oil reservoir that provides continuous misting of the air motor • Available in 6" extended anvil and 6" extended #5 spline drive anvil for high production truck tire changing

ASCOT NO.	MFG. NO.	DESCRIPTION
155-00280	IR-280	Standard Anvil
155-02806	IR-280-6	6" Extended Anvil
156-28006	IR-280-S6	#5 Spline Super Duty Anvil

1" SUPER DUTY AIR **IMPACT WRENCH**

- · Designed for getting into cramped spaces with three-way adjustable handle
- Ideal for spring work, tractor pads, bus maintenance and off-road/farm equipment
- TORQUE RANGE: 150-1000 ft./lb. (1600 maximum)

ASCOT NO.	MFG. NO.	DESCRIPTION
155-00290	IR-290	Standard Anvil
156-02901	IR-290-S	#5 Spline



1" ULTRA DUTY AIR IMPACT WRENCH

• APPLICATIONS: Most powerful 1" wrench for spring work, tractor pads, bus maintenance and off-road/farm equipment

• MAXIMUM TORQUE: 2000 ft./lb.

ASCOT NO.	MFG. NO.	DESCRIPTION
155-00293	IR-293	Standard Anvil
156-02931	IR-293-S	#5 Spline Drive

1" ULTRA DUTY AIR IMPACT WRENCH

- High power-to-weight ratio
- Full power reverse 3-position power regulator • 360° swivel inlet
- MAXIMUM TORQUE: 1250 ft./lb.



ASCOT NO. MFG. NO. 2171XP 155-21710

DESCRIPTION Standard Anvil









IR Cordless Tools

1/2" CORDLESS IMPACT WRENCH

- 780 ft./lb. reverse torque and 1100 ft./lb. nut-busting torque from a tool weighing just 6.8 lb., best power to weight ratio in its class.
- High-efficiency rare earth magnet motor, high-capacity variable speed trigger, all-metal drive train, and metal-reinforced housing enable this tool to stand up to the toughest jobs.
- Optimized balance combined with an ergonomic handle and soft touch over-molded grip provide increased comfort in extended use.







ASCOT NO.	MODEL	BATTERIES INCLUDED	DRIVE SIZE	ANVIL	MAX TORQUE FT./LB.	FREE SPEED (RPM)	BPM	LENGTH IN.	WEIGHT
153-71521	W7152	1	1/2" (Socket Retaining Ring)	Standard	1000 (1,360)	0-1900	2450	6.7	8.1 lb.
153-72522	W7252	1	1/2" (Socket Retaining Ring, 2" Ext)	2" Extended	1000 (1,360)	0-1900	2450	8.1	8.1 lb.

1" CORDLESS IMPACT WRENCH

- Remove hoses & trip hazards to keep operators & technicians safe
- World's Most Powerful 1" Cordless Impact Wrench with best in class power-to-weight ratio
- 250 bolts per charge tackle a full day's worth of work
- 3,000 ft-lbs of nut busting torque, 2,200 ft-lbs of tightening torque
- IP56 rated for tough environmental conditions
- IQv Power Control System includes 3 modes: MAX Power, MID, and Snug
- 360° adjustable D-handle: rotates fully around the tool as the job demands









153-96911

ASCOT NO.	MODEL	BATTERIES INCLUDED	DRIVE SIZE	ANVIL	MAX TORQUE FT./LB.	FREE SPEED (RPM)	BPM	LENGTH IN.	WEIGHT
153-94911	W9491-K4E	1	1" Square	Standard	2600 ft./lbs.	890	1170	20-1/8"	38.3
153-96911	W9691-K4E	1	1" Square	6" Extended	3000 ft./lbs.	890	1170	26-1/8"	39.9

▲WARNING: For more information go to www.P65Warnings.ca.gov.



Milwaukee Cordless Tools


CORDLESS 1/2" DRIVE IMPACT WRENCH

- 4 CUSTOMIZABLE MODES: Provides multiple fastening torque outputs designed for sedans, light trucks and box trucks
- POWERSTATE™ BRUSHLESS MOTOR: Delivers up to 750 ft./ lb. of fastening torque and 1,100 ft./lb. of nut-busting torque
- LONG MOTOR LIFE: POWERSTATE™ Brushless Motor delivers maximum power and long motor life
- FASTER TIRE SERVICE: Enables users to perform faster tire service by removing the hassle of pneumatic hoses, compressors, and torque sticks
- PART OF THE M18™ SYSTEM: Featuring over 175+ Tools

1" DRIVE EXTENDED ANVIL D-HANDI F IMPACT WRENCH

- POWERSTATE™ Brushless Motor delivers up to 2,000 ft-lbs of nut-busting torque and 1,900 ft-lbs of fastening torque
- Install up to 200 1-1/4" bolts on a single HIGH OUTPUT™ HD12.0Ah battery
- The 4-Mode DRIVE CONTROL™ provides you with greater control over the output speed and power of the MILWAUKEE® High Torque Impact Wrench
- The ONE-KEY™ Technology allows you to customize, track, and manage the impact wrench with the ability to set a repeatable torque output for maximum control



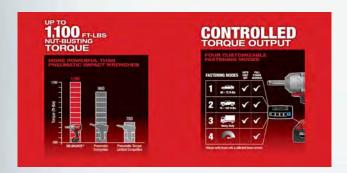

ASCOT NO.	MFG. NO.	DESCRIPTION
153-76920	2769-20	Cordless 1/2" Drive Impact Wrench – 2" Extended Anvil (Bare Tool)
153-76922	2769-22	Cordless 1/2" Drive Impact Wrench - 2" Extended Anvil (Kit)



ASCOT NO.	MFG. NO.	DESCRIPTION
155-86920	2869-20	1" Drive Extended Anvil D-Handle Impact Wrench (Bare Tool)
155-86922	2869-22	1" Drive Extended Anvil D-Handle Impact Wrench (Kit)





CORDLESS LOW SPEED BUFFER KIT

- · Dedicated buffing and drilling
- 2-Mode Drive Control™
- · Drilling Mode: 1,200 RPM
- · Buffing Mode: 2,500 RPM
- Runtime to complete up to 30 flat repairs on a single XC4.0Ah battery
- · Premium rubber overmold withstands corrosive materials and provides increased comfort when in use
- Compatible with all M12™ batteries & chargers

158-40922

- POWERSTATE™ Brushless Motor
- REDLINK PLUS™ Electronic Intelligence:
- REDLITHIUM™ batteries:
- Kit includes: Low Speed Tire Buffer, M12™ REDLITHIUM™ CP2.0 Battery, M12™ REDLITHIUM™ XC 4.0 Extended Capacity Battery Pack, M12™ Lithium-ion Battery Charger, Quick Change Adapter, Carrying Case

ilwaukee

M12 FLIEL

COMMERCIAL TIRE FLAT REPAIR KIT

- Designed to deliver you increased productivity for high volume commercial flat repairs that commercial tire technicians demand
- Kit includes: M12 FUEL™ Low Speed Tire Buffer (2409-20), M12 FUEL™ 1/2" Drill Driver (Tool Only) (2503-20), Quick Change Adapter, M12™ REDLITHIUM™ CP2.0 Battery (48-11-2420), M12™ REDLITHIUM™ XC 4.0 Extended Capacity Battery Pack(48-11-2440), M12™ Lithium-ion Battery Charger (48-59-2401) & Carrying Case







ASCOT NO.	MFG. NO.	DESCRIPTION
158-40920	2409-20	Cordless Low Speed Buffer
158-40922	2409-22	Cordless Low Speed Buffer Kit

ASCOT NO. MFG. NO. DESCRIPTION 158-45922 2459-22 Commercial Tire Flat Repair Kit





Milwaukee Power Tools (cont.)

CORDLESS 1/4" HIGH SPEED RATCHET KIT

Our M12 FUEL™ 1/4" High Speed Ratchet Kit is part of the latest addition to our best-in-class lineup of ratchets. This MILWAUKEE® cordless ratchet kit features the fastest speed while installing and removing fasteners. The most compact head size in its class gives you more access in tight spaces. A steel yoke housing and POWERSTATE™ Brushless Motor deliver the superior durability that you expect from Milwaukee. The M12 FUEL™ High Speed Ratchets are an ideal addition to any technician tool chest, allowing you to be more productive than any other battery-powered ratchet.

CORDLESS 3/8" RATCHET TOOL KIT

• MOST POWERFUL: Delivers industry leading torque output of up to 40 ft./lb. • MOST COMPACT: Up to 20% smaller head size • MOST DURABLE: Worlds 1st brushless ratchet provides 2x longer motor life • Best-in class torque to head size ratio • Premium metal components for longer durability



ASCOT NO. MFG. NO. DESCRIPTION 172-56622 2566-22 Cordless 1/4" Ratchet Tool Kit



DESCRIPTION ASCOT NO. MFG. NO. 172-55721 2557-21 Cordless 3/8" Ratchet Tool Kit

M18 CORDLESS TIRE INFLATOR

- Fastest 18V Cordless Tire Inflator: Top off 33" light truck tires in under 1 minute
- Truefill™ Technology: Auto pressure check feature activates to ensure PSI target is achieved, automatic shut-off at selected PSI prevents overinflation
- Tire capacity: Premium components and unmatched durability to handle tires over 100 PSI, rated for 150 PSI max
- Optimized for passenger, light truck and other medium duty tires
- PSI memory preset: Save your most used PSI rating with up to 4 PSI slots
- On-board hose & nozzle storage: easily store 36" hose and attachments
- Accessories: Includes all brass Schrader chuck, inflation needle, inflator nozzle & Presta chuck
- · Anti-vibration feet: minimize tool walk while in use
- Fits all M18[™] Batteries

DESCRIPTION ASCOT NO MEG NO 477-84820 2848-20 M18 Cordless Tire Inflator







M18 LITHIUM 3.0AH HIGH **OUTPUT BATTERY**

• REDLINK™ INTELLIGENCE: Our battery circuitry provides optimized performance and overload protection using total system communication between tool, battery and charger • BEST-IN-CLASS CONSTRUCTION: Offers long-lasting performance and the best protection against jobsite, weather and environmental conditions • FUEL GAUGE ONBOARD: Displays remaining run-time • VERSATILITY: Powers all 175+ M18[™] cordless solutions • Compatible with all M18[™] tools • 2 year battery warranty

M18 LITHIUM 5.0AH **BATTERY PACK**

• REDLINK™ INTELLIGENCE: Provides optimized performance and overload protection using total system communication between tool, battery and charger • BEST-IN-CLASS CONSTRUCTION: Offers long-lasting performance and durability • FUEL GAUGE ONBOARD: Displays remaining runtime for less downtime on the job • ALL-WEATHER PERFORMANCE: Delivers fade free power in extreme jobsite conditions • VERSATILITY: Powers more than 175+ Milwaukee® M18™ cordless power tools • Ground transport only

M18 LITHIUM HD12.0 HIGH **OUTPUT BATTERY**

• The M18 REDLITHIUM™ HIGH OUTPUT™ HD12.0 is the best performing cold weather pack ever made, providing increased power in extreme cold weather conditions (below OF / -18C) • Provides the most work per charge of any professional power tool battery in the industry, driving full corded replacement on the jobsite • The REDLITHIUM™ HIGH OUTPUT™ HD12.0 battery is fully compatible with 150+ M18™ solutions



ASCOT NO. 345-11835

MFG. NO. 48-11-1835

DESCRIPTION M18 Lithium High Output Battery CP3.0 ASCOT NO. 345-11850

▲WARNING: For more information go to www.P65Warnings.ca.gov.

MFG. NO. 48-11-1850 DESCRIPTION M18 Lithium 5.0AH Battery Pack

ASCOT NO 345-11812

MFG NO 48-11-1812 DESCRIPTION M18 Lithium High Output Battery HD12.0



M12 LITHIUM BATTERIES

- REDLINK™ INTELLIGENCE: Provides optimized performance and overload protection using total system communication between tool, battery and charger • BEST-IN-CLASS CONSTRUCTION: Offers long-lasting performance and durability • ALL-WEATHER PERFORMANCE: Delivers fade-free power in extreme job site conditions
- VERSATILITY: Powers 70+ Milwaukee M12 cordless solutions

ASCOT NO.	MFG. NO.	DESCRIPTION
345-12430	48-11-2430	M12 Lithium 3.0 Compact Battery
345-12440	48-11-2440	M12 Lithium XC4.0
345-12460	48-11-2460	M12 Lithium XC6.0



Air Hammers & Die Grinders

SUPER DUTY AIR HAMMER

· APPLICATIONS: For front-end and heavy exhaust work, riveting, king pin removal, bushing driving and bolt shearing . Controls starting strokes precisely with an extra-sensitive tease throttle · Super duty power, at up to 1,725 blows per minute • CHISEL SHANK DIAMETER: .401"



ASCOT NO. MFG. NO. 159-00132 IR-132

DESCRIPTION

Super Duty Air Hammer

HEAVY DUTY ANGLE AIR DIE GRINDER

- · For work in confined areas
- Features a right angle head
- · APPLICATIONS: For grinding, porting, polishing, de-burring, breaking sharp edges • Selflocking throttle lever • Positive grip 1/4" capacity collet chuck



ASCOT NO. MFG. NO. 157-00302 IR-302B

DESCRIPTION

Heavy Duty Angle Air Die Grinder



157-00302

NEEDLE SCALER

 APPLICATIONS: For surface preparation work involving the cleaning or removal of paint, rust, dirt or weld slag • Durable, dependable and economical



DURABLE & ECONOMICA

ASCOT NO. 157-00125

MFG. NO. IR-125

DESCRIPTION Needle Scaler



HEAVY DUTY AIR DIE GRINDER

· APPLICATIONS: Designed for porting, light weld grinding and breaking sharp edges • 25,000 RPM • Self-locking throttle lever • Positive grip 1/4" capacity collet chuck with two collet wrenches

ASCOT NO. 157-00308

MFG. NO. IR-308B

DESCRIPTION Heavy Duty Air

Die Grinder



AIR HAMMER KITS

• Five-piece chisel set in a plastic pouch with .401" shank diameters • INCLUDES: Edging Tool, Tail Pipe Cutter, Straight Chisel, Cutting Chisel and Pouch



ASCOT NO.	MFG. NO.	DESCRIPTION
171-01151	IR-115K	IR-115 Air Hammer Kit
171-01161	IR-116K	IR-116 Air Hammer Kit
171-01171	IR-117K	IR-117 Air Hammer Kit

SUPER DUTY MINI AIR DIE GRINDER

• APPLICATIONS: For grinding, edgebreaking, de-burring, porting and polishing • Right-angle configuration

• Compact, lightweight and easy to handle



MFG. NO. ASCOT NO. IR-307B 157-00307

EASY TO HANDLE

DESCRIPTION Super Duty Mini Air Die Grinder









Finishing Tools & Air Drills

3/8" HEAVY DUTY AIR DRILL

• Planetary gear reduction balances the load on bearings and gears, increasing tool life • Variable speed throttle makes starting holes easy • Positive action trigger stop reduces maximum speed at any time



TIRE BUFFERS

• APPLICATIONS: For quick work of patchwork and roughing up low areas for recapping, tire scuffing and cleaning tire moldings

157-00327

• Lever style tease trigger with lock-off for easy operation







157-17802



• APPLICATIONS: Designed for drilling, hole sawing, cylinder honing and other jobs that call for a 1/2" size • Industrial grade 1/2" chuck, ball and needle bearing construction and double reduction planetary gearing for longer life • No-load speed of 500 RPM and auxiliary side handle



ASCOT NO.	MFG. NO.	DESCRIPTION
157-00327	IR-327	High Speed Tire Buffer
157-01327	IR-327LS	Low Speed Tire Buffer, includes Over Hose

ASCOT NO.	MFG. NO.
157-07803	IR-7803A
157-17803	IR-7803RA

DESCRIPTION Standard Air Drill Reversible Air Drill

157-17803

⚠WARNING: For more information go to www.P65Warnings.ca.gov.

Finishing Tools & Air Drills (cont.)



HEAVY DUTY AIR ANGLE SANDER 7" PAD

• Heavy-duty motor handles tough jobs • Lightweight at only 4.5 lb. (2.04 kg.) • Ball Bearing construction for increased tool life • APPLICATIONS: rouging body filler, removing rust, and smoothing welds



ASCOT NO. MFG. NO. DESCRIPTION

157-00313 IR-313A Heavy Duty Air Angle Sander 7" Pad

HEAVY DUTY DUAL ACTION QUIET AIR SANDER 6" PAD

- A built-in silencer muffles noise as you work
- APPLICATIONS: Quality sander used for feather edging, metal preparation and finish work on body filler



158-00311

SURFACE CONDITIONING KIT

• KIT INCLUDES: IR301 1/4" angle head die grinder in a blow molded plastic case with two coarse and two medium grit 3" 3M Rolco™ surface conditioning pads, two coarse, two medium grit 2" 3M Rolco™ surface conditioning pads and a disc holder



158-03012

MFG. NO. IR-301-2MK

DESCRIPTION Surface Conditioning Kit

ASCOT NO. 158-00311

MFG. NO. IR-311A

DESCRIPTION

Heavy Duty Dual Action Quiet Air Sander 6" Pad

BUYER'S GUIDE ASCOT SUPPLY CORPORATION





3/8" SUPER DUTY AIR IMPACT WRENCH

• Titanium hammer case • 280 ft./lb. of torque will remove even the toughest nuts and bolts • APPLICATIONS: Transmissions, brakes, exhaust, body repair and underhood

3/8" SUPER DUTY AIR IMPACT WRENCH

• Tremendous power and longer life • APPLICATIONS: Popular choice of professional mechanics for under car, under hood and bench work • Handle exhaust directs air away from work • TORQUE RANGE: 20-150 ft./lb., 180 max.





▲WARNING: For more information go to www.P65Warnings.ca.gov.







ASCOT NO.	MFG. NO.	DESCRIPTION
150 00010	ID 212	7/0" 6 0

152-00212 | IR-212 | 3/8" Super Duty Air Impact Wrench

Air Tool Lubricants & Conditioner

BLASTER AIR TOOL CONDITIONER

· APPLICATIONS: Thoroughly cleans internal pneumatic tool parts, restoring them to peak performance and prolonging tool life • Breaks loose deposits that create friction and impede smooth operation • Provides long-lasting lubrication • Protects tools from freezing down to -25°F • 12 cans per case



ASCOT NO.	MFG. NO.	DESCRIPTION
181-00404	16-ATC	Blaster Air Tool Conditioner – 11 Oz.
181-01404	ATC-TS	Blaster Air Tool Conditioner - 3.5 Oz. Aerosol



SUPER RED PNEUMATIC AIR TOOL LUBRICANT

· APPLICATIONS: Dissolves gum & varnish formation • Prevents gum & varnish formation • Ensures smoother starts • Special rust & oxidation inhibitor • Clean and free running • 12 bottles per case



ASCOT NO. MFG. NO. DESCRIPTION 0406 Super Red Pneumatic 181-00406 Air Tool Oil, 32 Oz.



BLASTER AIR TOOL OIL/LUBE

• APPLICATIONS: Provides lubrication & prolongs tool life • Improves tool performance • Formulated for use with in-line oilers • 12 cans per case



ASCOT NO. MFG. NO. 181-00016 16-ATL

DESCRIPTION Blaster Air Tool Oil/Lube - 16 Oz.



MARVEL AIR TOOL OIL

• APPLICATIONS: Specially formulated for use in all piston type rotary air tools and in-line air lubricators • Prevents rust formation while providing positive lubrication for smooth starting and longer tool life • Assures maximum performance by dissolving gum and sludge • 6 bottles per case



ASCOT NO. MFG. NO. DESCRIPTION MM085 181-00085 32 Oz.







Air Tool Accessories

AIR TOOL **LUBRICANTS**

ASCOT NO.	MFG. NO.	DESCRIPTION
181-10510	105-LBK1	4 Oz. IR 105 Grease, 4 oz. IR10 Oil & Grease Gun Head
181-10540	105-4T	(6) 4 oz. Tubes - IR 105 Grease Refills
181-11510	115-LBK1	4 oz. IR 115 Grease, 4 oz. IR10 Oil & Grease Gun Head
181-11540	115-4T	(6) 4 oz. Tubes - IR 115 Grease Refills
181-12228	R000A2-228	Grease Gun
328-10001	100-1	1 lb. Grease for Impact Wrenches

AIR TOOL COVERS

• Vinyl boots also absorb some of the tool vibration and protect air impact ratchets, wrenches and drills from external damage

IR TOOL NO.	KIT NO.	ASCOT TOOL NO.
212	212-Boot	176-20232
211	211-P32	176-21132
231C, 231HA-2	231-Boot	176-23122
2235	2235M-Boot	176-13532
244A, 244A-2	244-Boot	176-24432
261, 261-2, 271	261-Boot	176-26132
285B-6, 285BS-6, 285B	285-Boot	176-28532
259	259-Boot	176-25925
2135QXPA, 2135QXPA-2	2135M-Boot	176-21350

HAMMER MECHANISM TUNE-UP KIT

- INCLUDES: the anvil, hammer (or pins) and gaskets for the impact mechanism
- 110-TK1 includes only the cam ball, two anvil pins and anvil spring

IR TOOL NO.	KIT NO.	ASCOT TOOL NO.
231C, 244A	231-THK1	176-00231
231-2HA-2, 244A-2	231-THK2	178-01231
2235TiMAX	2235-THK1	178-02235
2135QXPA-2	2135-THK1	178-02335



181-10510

178-02135

RETAINING RINGS

IR TOOL NO.	ASCOT TOOL NO.	DESCRIPTION
231-425A	175-31425	Socket Retainer for IR231, 231-2
R1A-159	175-01590	Retainer O-Ring for IR 231, 231-2
291-425	175-91425	Socket Retainer for IR-281, 285
291-426	175-81426	Retainer O-Ring for IR-281, 285

MOTOR TUNE-UP KITS

• INCLUDES: the vanes, gaskets and seals for a complete tune-up • 231-TK3 also includes ball bearings

IR TOOL NO.	KIT NO.	ASCOT TOOL NO.
212	212-TK2	176-10212
231C, 231HA-2	231-TK3	176-10221
235	235-TK3	176-12313
244A, 244A-2	244-TK2	176-10244
261, 271	261-TK2	176-10261
280 Series	280-TK2	176-10280
7803A, 7803RA	7803-TK1	176-17803
285B-6	285B-TK1	176-10285
2235TiMAX	2235-TK1	176-22235
2135QXPA, 2135QXPA-2	2135-TK2	176-32135

IMPACT WRENCH ACCESSORIES

ASCOT NO.	MFG. NO.	DESCRIPTION
175-23142	IR 231-425	IR 1/2" Impact Wrench Retainer Clip
175-33104	231-Boot	Red Protective Boot for IR 231HA-2 Impact Wrenches
175-82651	H-082651	1" Impact Wrench Retainer Clip O-Ring
175-83071	P-08371	O-Ring for 1/2" Impact Wrench Retainer Clips



INDUSTRIAL STRENGTH SILICONE LUBRICANT

 Teflon[™] fluoropolymer enhances performance • Longlasting lubrication • Won't accumulate • dust & dirt

• QUANTITY: 12 pe



r case			- /
			- 1

ASCOT NO.	MFG. NO.	DESCRIPTION 3	28-00016
328-00016	16-SL	Blaster Silicone Lubricant – 11 Oz	Z.



Work Stations

TOOL CADDY TIRE TOOL STAND

• Provides easy and fast access to all those tools needed quickly when changing tires such as torque sockets, valve stem pullers, hub cap tools, air impact guns and torque sticks • Reduces installation time • Makes tire changing easier & work stations more organized • Reduces the number of trips for the technician by having all tools needed at their fingertips • WEIGHT: 35 lb.

ASCOT NO.	MFG. NO.	DESCRIPTION
319-50015	MTTS	Tool Caddy Tire Tool Stand

MOBILE WHEEL **WORK STATION**

• Features gas-strut assisted boom that supports the weight of those heavy impact wrenches • The suspended impact wrench is capable of rotating to the operator desired position • Features side and rear storage compartments designed to organize sockets, tire irons, lubricants, hoses and various wheel parts • Air wrench is supported and held in desired position • Air wrench suspension boom allows for directional freedom and reduces damage

ASCOT NO.	MFG. NO.	DESCRIPTION
515-00555	WS-005	Mobile Wheel Work Station

TIRE TOOL STATION

• Organize your tools • Universal top tray with slots for torque sockets, etc. • Dual cradles for impact guns, 1/4" airline connections • INCLUDES: (2) 25' x 3/8" recoil hoses with 1/4" swivel fittings

ASCOT NO.	MFG. NO.	DESCRIPTION
515-02400	2400	Tire Tool Station





Impact Socket Sets

Individual Impact Sockets

Torque Wrenches & Accessories

Loose Nut Prevention

Wheel Centering Products

Lug Nut Removal Products

Wheel Attaching Hardware

Tire & Wheel Service Tools

Stud & Hub Cleaning Tools

SERVICE SERVICE



Impact Socket Sets

1/2" [DRIVE		
ASCOT NO.	MFG. NO.	DESCRIPTION	DETAILS
163-22219	122019K2	1/2" Drive 4-Piece Flank Bite Damaged Nut Remover Socket Set	Contains 17mm, 19mm, 21mm, 22mm Individual sockets also available seperately: 17mm (163-22017), 19mm (163-22019), 21mm (163-22021), 22mm (163-22022) New Flank Bite design works on up to an industry leading 90% rounded lug nut
57-12050	1205D	1/2" Drive 5-Piece Deep Thin Wall Flip Set	Contains 3/4" x 13/16", 19mm x 21mm, 7/8" x 15/16", 17mm x 19mm, 3" extension
67-12051	000524	1/2" Drive 5-Piece 1/2 Size Flip Socket Set	Coated with a rust and corrosion resistant black oxide finish Coated with a rust and corrosion resistant black oxide finish
63-02849	2849	1/2" Drive Extra Thin Wall 9-Piece SAE & Metric Wheel Protector Socket Set	Contains 6 SAE Sockets: 3/4" (light green), 13/16" (purple), 7/8" (green), 15/16" (brown), 1" (silver) and 1-1/16" (black) Contains 3 Metric Sockets: 17mm (blue), 19mm (yellow) and 21mm (red)
63-01150	1150	1/2" Drive 13-Piece SAE Set	• Contains 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1", 1-1/16", 1-1/8", 1-1/4"
63-01151	1151D	1/2" Drive 13-Piece Deep Set	Contains 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1", 1-1/16", 1-1/8", 1-1/4"
53-01152	1152M	1/2" Drive 14-Piece Metric Standard Set	Contains 10mm, 11mm, 12mm, 13mm, 14mm, 15mm, 16mm, 17mm, 18mm, 19mm, 21mm, 22mm, 26mm, 27mm
63-01153	1153MD	1/2" Drive 14-Piece Metric Deep Set	Contains 10mm, 11mm, 12mm, 13mm, 14mm, 15mm, 16mm, 17mm, 18mm, 19mm, 21mm, 22mm, 26mm, 27mm
63-05153	1153DD	1/2" Drive 29-Piece Metric and SAE 6 Point Deep Impact Socket Set	Contains (Deep SAE) 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1", 1-1/16", 1-1/8" and 1-1/4" Contains (Deep Metric) 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 26 and 27mm Contains (Deep Flip) 3/4" x 13/16" deep & 19mm x 21mm
63-02668	2668	1/2" Drive Master 39-Piece SAE Impact Socket Set	Contains (Std) 7/16", 1/2",9 /16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1", 1-1/16", 1-1/8", 1-3/16", 1-1/4", 1-5/16", 1-3/8", 1-7/16" and 1-1/2" Contains (Deep) 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1", 1-1/16", 1-1/8", 1-3/16", 1-1/4", 1-5/16", 1-3/8", 1-7/16" and 1-1/2" Universal
163-02669	2669	1/2" Drive Master 39-Piece Metric Impact Socket Set	Contains (Std) 9mm, 10mm, 11mm, 12mm, 13mm, 14mm, 15mm,16mm, 17mm, 18mm, 19mm, 20mm, 21mm, 22mm, 23mm, 24mm, 26mm, 27mm and 30mm Contains (Deep) 9mm, 10mm, 11mm, 12mm, 13mm, 14mm, 15mm, 16mm, 17mm, 18mm, 19mm, 20mm, 21mm, 22mm, 24mm, 26mm, 27mm and 30mm Universal Joint





Impact Socket Sets

3/4"	DRIVE		
ASCOT NO.	MFG. NO.	DESCRIPTION	DETAILS
164-04626	4626	3/4" Drive 4-Piece Budd Wheel Socket Set	Contains 1-1/2" hex x 13/16 square budd wheel impact socket, 35mm x 17mm square budd wheel impact socket, 41mm x 21mm square budd wheel impact socket and 33mm deep
164-02185	2185M	3/4" Drive 5-Piece Metric Standard Truck Set	Contains 4 pts. Budd wheel standard length, 17mm, 27mm, 30mm, 35mm, 35mm standard
164-02181	2181D	3/4" Drive 8-Piece SAE Deep Set	Contains 1", 1-1/16", 1-1/8", 1-1/4", 1-5/16", 1-3/8", 1-7/16", 1-1/2"
164-02110	2110	3/4" Drive 10-Piece Truck Set	Contains 13/16" Square, 1-1/16", 1-1/8", 1-1/4" Thin Wall Deep, 1-1/2" Budd Wheel, 17mm & 21mm Square, 33mm, 35mm & 41mm Deep



1" DRIVE & MISCELLANEOUS SETS

ASCOT NO.	MFG. NO.	DESCRIPTION	DETAILS
169-01234	1234A	4-Piece Impact Adapter Socket Set	• Contains 1/2" (F) x 3/4" (M) adapter, 3/4" (F) x 1" (M) adapter, 3/4" (F) x 1/2" (M) adapter, 1" (F) x 3/4" (M) adapter
165-05626	5626	1" Drive 5-Piece Budd Wheel Socket Set	Contains 1-1/2" hex x 13/16" square budd wheel impact socket, 35mm x 17mm square budd wheel impact socket, 38mm x 20mm square budd wheel impact socket, 41mm x 21mm square budd wheel impact socket and 33mm deep
165-03197	3197M	1" Drive 7-Piece Metric Truck Set	Contains 17mm, 21mm, 4 pts. budd wheel standard length, 27mm, 33mm, 36mm, 41mm deep
165-03119	3119	1" Drive 9-Piece Large Truck Socket Set	Contains 13/16" & 15/16" square, 33mm, 1-1/2", 1-5/8", 1-3/4", 1-7/8", 2" & 2-1/2" deep sockets
165-03190	3190	1" Drive 9-Piece SAE Truck Set	Contains 13/16", 4 points budd wheel standard length, 7/8", 15/16", 1", 1-3/16", 1-1/2" deep with inside lip, 1-1/16", 1-1/8", 1-1/4" thin wall deep
166-04191	4191	#5 Spline Drive 9-Piece SAE Truck Set	Contains 13/16", 4 points budd wheel standard length, 7/8", 15/16", 1", 1-3/16", 1-1/2" deep with inside lip, 1-1/16", 1-1/8", 1-1/4" thin wall deep







Individual Impact Sockets

	ASCOT NO.	MFG. NO.	DESCRIPTION
			METRIC
	163-10100	1010M	1/2" Drive x 10mm Std.
	163-10111	1011M	1/2" Drive x 11mm Std.
	163-10120	1012M	1/2" Drive x 12mm Std.
	163-10130	1013M	1/2" Drive x 13mm Std.
	163-10142	1014M	1/2" Drive x 14mm Std.
	163-10150	1015M	1/2" Drive x 15mm Std.
	163-10162	1016M	1/2" Drive x 16mm Std.
IS	163-10170	1017M	1/2" Drive x 17mm Std.
Š	163-10182	1018M	1/2" Drive x 18mm Std.
SO	163-10190	1019M	1/2" Drive x 19mm Std.
5	163-10210	1021M	1/2" Drive x 21mm Std.
Ճ	163-10221	1022M	1/2" Drive x 22mm Std
Ξ	163-10262	1026M	1/2" Drive x 26mm Std.
2	163-10270	1027M	1/2" Drive x 27mm Std.
STANDARD IMPACT SOCKETS			SAE
ΣŢ	163-10140	1014	1/2" Drive x 7/16" Std.
DR	163-10160	1016	1/2" Drive x 1/2" Std.
	163-10180	1018	1/2" Drive x 9/16" Std.
1/2"	163-10200	1020	1/2" Drive x 5/8" Std.
	163-10220	1022	1/2" Drive x 11/16" Std.
	163-10240	1024	1/2" Drive x 3/4" Std.
	163-10260	1026	1/2" Drive x 13/16" Std.
	163-10280	1028	1/2" Drive x 7/8" Std.
	163-01030	1030	1/2" Drive x 15/16" Std.
	163-10320	1032	1/2" Drive x 1" Std.
	163-10360	1036	1/2" Drive x 1-1/8" Std.
	163-10400	1040	1/2" Drive x 1-1/4" Std.

	ASCOT NO.	MFG. NO.	DESCRIPTION
			METRIC
WALL	163-10172	1017MEDT	1/2" Drive x 17mm Extra Thin Wall
× ×	163-10183	1018MEDT	1/2" Drive x 18mm Extra Thin Wall
KET	163-10191	1019MEDT	1/2" Drive x 19mm Extra Thin Wall
	163-10211	1021MEDT	1/2" Drive x 21mm Extra Thin Wall
EXTRA ACT SO	163-10223	1022MEDT	1/2" Drive x 22mm Extra Thin Wall
A C	163-10230	1023MEDT	1/2" Drive x 23mm Extra Thin Wall
A M			SAE
1/2"	163-10241	1024EDT	1/2" Drive x 3/4" Extra Thin Wall
-	163-10261	1026EDT	1/2" Drive x 13/16" Extra Thin Wall
	163-10282	1028EDT	1/2" Drive x 7/8" Extra Thin Wall

1/2" DRIVE 17MM EXTRA THIN WALL **DEEP MERCEDES SOCKET**

• Features a 17mm x 6-point "flower petal design" • Suited for rugged impact use and features a detent ball hole in the base to allow for secure attachment to those tools • Works on 2012 and newer model year Mercedes Benz S-Class as well as those select 2007 and newer model year CL-Class, GL-Class, GLK-Class, GLS-Class and others that use 17mm convex "flower petal" lug bolts • Protective sleeve to prevent damage to the wheel • Designed for use with 1/2-Inch Square Drives

ASCOT NO.	MFG. NO.	DESCRIPTION
467 46474	40471450714	. (0 !! 0 !

163-10174 1017MEDTM 1/2" Drive 17mm Extra Thin Wall Deep Mercedes socket



	MFG. NO.	DESCRIPTION
		METRIC
163-10101	1010MD	1/2" Drive x 10mm Deep
163-10121	1012MD	1/2" Drive x 12mm Deep
163-10131	1013MD	1/2" Drive x 13mm Deep
163-10143	1014MD	1/2" Drive x 14mm Deep
163-10151	1015MD	1/2" Drive x 15mm Deep
163-10163	1016MD	1/2" Drive x 16mm Deep
163-10171	1017MD	1/2" Drive x 17mm Deep
163-22017	122019K2-17	1/2" Drive x 17mm Deep
163-01018	1018MD	1/2" Drive x 18mm Deep
163-01019	1019MD	1/2" Drive x 19mm Deep
163-22019	122019K2-19	1/2" Drive x 19mm Deep
163-01021	1021MD	1/2" Drive x 21mm Deep
163-22021	122019K2-21	1/2" Drive x 21mm Deep
163-10222	1022MD	1/2" Drive x 22mm Deep
163-22022	122019K2-22	1/2" Drive x 22mm Deep
163-10263	1026MD	1/2" Drive x 26mm Deep
163-10271	1027MD	1/2" Drive x 27mm Deep
163-10283	1028MD	1/2" Drive x 28mm Deep
163-01032	1032MD	1/2" Drive x 32mm Deep
163-01033	1033MD	1/2" Drive x 33mm Deep
		SAE
163-10141	1014D	1/2" Drive x 7/16" Deep
163-10161	1016D	1/2" Drive x 1/2" Deep
163-10181	1018D	1/2" Drive x 9/16" Deep
163-10201	1020D	1/2" Drive x 5/8" Deep
163-01022	1022D	1/2" Drive x 11/16" Deep
163-01024	1024D	1/2" Drive x 3/4" Deep
163-01026	1026D	1/2" Drive x 13/16" Deep
163-10281	1028D	1/2" Drive x 7/8" Deep
163-10300	1030D	1/2" Drive x 15/16" Deep
163-11032	1032D	1/2" Drive x 1" Deep
163-01034	1034D	1/2" Drive x 1-1/16" Deep
163-01036	1036D	1/2" Drive x 1-1/8" Deep
163-10401	1040D	1/2" Drive x 1-1/4" Deep
163-01048	1048D	1/2" Drive x 1-1/2" Deep
163-15260	1526SD	1/2" Drive x 13/16" Square 8-Point

	ASCOT NO.	MFG. NO.	DESCRIPTION
			METRIC
	167-12110	1211D	1/2" Dr. x 11mm x 12mm Chrome Deep Flip
S	167-12179	1271DT	1/2" Dr. x 17mm x 19mm Deep Thin Flip
	167-12910	1291	1/2" Dr. x 19mm x 21mm Std. Flip
Š	167-12911	1291D	1/2" Dr. x 19mm x 21mm Deep Flip
T S	167-12912	1291DT	1/2" Dr. x 19mm x 21mm Deep Extra Thin Flip
Ä	167-18195	1A7535	1/2" Dr. x 18.5mm x 19.5mm Deep Flip
Σ	167-21215	1A7538	1/2" Dr/ x 21mm x 21.5mm Deep Flip
₽	167-21225	1A7542	1/2" Dr. x 21.5mm x 22.5mm Deep Flip
A H	167-22225	1A7540	1/2" Dr. x 22mm x 22.5mm Deep Flip
/2" DR FLIP IMPACT SOCKETS			SAE
1/2	167-12460	1246D	1/2" Dr. x 3/4" x 13/16" Deep Flip
	167-12461	1246DT	1/2" Dr. x 3/4" x 13/16" Deep Extra Thin Flip
	167-12490	1249D	1/2" Dr. x 7/8" x 15/16" Deep Flip
	167-12510	1251D	1/2" Dr. x 1" x 1-1/16" Deep Flip



WHEEL SERVICE PRODUCTS



3/4" DR IMPACT SOCKETS

ASCOT NO.	MFG. NO.	DESCRIPTION
164-02017	2017MS	3/4" Drive x 17mm Square
164-02019	2019MS	3/4" Drive x 19mm Square
164-02020	2020MS	3/4" Drive x 20mm Square
164-02021	2021MS	3/4" Drive x 21mm Square
164-02024	2024D	3/4" Drive x 3/4" Deep
164-02026	2026S	3/4" Drive x 13/16" Square
164-02028	2028D	3/4" Drive x 7/8" Deep
164-02030	2030	3/4" Drive x 15/16" Std.
164-02032	2032D	3/4" Drive x 1" Deep
164-02033	2033MD	3/4" Drive x 33mm Deep
164-02034	2034DT	3/4" Drive x 1-1/16" Deep Thin Wall
		METRIC
164-20270	2027M	3/4" Drive x 27mm Std.
164-20271	2027MD	3/4" Drive x 27mm Deep
164-20301	2030M	3/4" Drive x 30mm Std.
164-20330	2033M	3/4" Drive x 33mm Std.
164-02035	2035M	3/4" Drive x 35mm Std.
164-20350	2035MD	3/4" Drive x 35mm Deep
164-20360	2036MD	3/4" Drive x 36mm Deep
164-02041	2041MD	3/4" Drive x 41mm Deep
		SAE
164-20260	2026D	3/4" Drive x 13/16" Deep
164-20300	2030D	3/4" Drive x 15/16" Deep
164-02036	2036DT	3/4" Drive x 1-1/8" Deep Thin Wall
164-20401	2040D	3/4" Drive x 1-1/4" Deep
164-20402	2040DT	3/4" Drive x 1-1/4" Deep Thin Wall
164-02038	2038D	3/4" Drive x 1-3/16" Deep
164-02042	2042D	3/4" Drive x 1-5/16" Deep
164-02044	2044D	3/4" Drive x 1-3/8" Deep
164-02046	2046D	3/4" Drive x 1-7/16" Deep
164-20480	2048	3/4" Drive x 1-1/2" Std.
164-20481	2048D	3/4" Drive x 1-1/2" Deep
164-20482	2048DR	3/4" Drive x 1-1/2" Limited Depth
164-02052	2052D	3/4" Drive x 1-5/8" Deep
164-02056	2056D	3/4" Drive x 1-3/4" Deep
164-02060	2060D	3/4" Drive x 1-7/8" Deep
164-02323	2323C	3/4" Drive x 1-1/2" Hex x 13/16" Square

	ASCOT NO.	MFG. NO.	DESCRIPTION
			METRIC
	166-04033	4033MD	#5 Spline x 33mm Deep
	166-04035	4035MDT	#5 Spline x 35mm Deep Thin Wall
ETS	166-04041	4041MDT	#5 Spline x 41mm Deep Thin Wall
SPLINE DR IMPACT SOCKETS			SAE
T S(166-04026	4026S	#5 Spline x 13/16" Square
PAC	166-04034	4034DT	#5 Spline x 1-1/16" Deep Thin Wall
Σ	166-40360	4036D	#5 Spline x 1-1/8" Deep
P	166-40361	4036DT	#5 Spline x 1-1/8" Deep Thin Wall
Z	166-04038	4038	#5 Spline x 1-3/16" Std.
SPI	166-04040	4040DT	#5 Spline x 1-1/4" Deep Thin Wall
#2	166-04042	4042DT	#5 Spline x 1-5/16" Deep Thin Wall
	166-04048	4048D	#5 Spline x 1-1/2" Deep w/Inside Lip
	166-40480	4048DT	#5 Spline x 1-1/2" Deep Thin Wall
	166-04323	4323C	#5 Spline x 13/16" Square x 1-1/2" Hex

	ASCOT NO.	MFG. NO.	DESCRIPTION
			METRIC
	165-03017	3017MS	1" Drive x 17mm Square
	165-03019	3019MS	1" Drive x 19mm Square
	165-03020	3020MS	1" Drive x 20mm Square
	165-03021	3021MS	1" Drive x 21mm Square
	165-03027	3027MD	1" Drive x 27mm Deep
	165-30302	3030MD	1" Drive x 30mm Deep
	165-03033	3033MD	1" Drive x 33mm Deep
	165-03035	3035MD	1" Drive x 35mm Deep
	165-30381	3038MD	1" Drive x 38mm Deep
	165-30410	3041MDT	1" Drive x 41mm Deep Thin Wall
	165-03041	3041MD	1" Drive x 41mm Deep
	165-03321	3321MC	1" Drive 41mm x 21mm Square
	165-03517	3517MC	1" Drive x 35mm Deep x 17mm Sq.
	165-03820	3820MC	1" Drive x 38mm Deep x 20mm Sq.
			SAE
	165-03026	3026S	1" Drive x 13/16" Square
ETS	165-03030	3030S	1" Drive x 15/16" Square
Š	165-03034	3034DT	1" Drive x 1-1/16" Thin Wall Deep
T S(165-03042	3042D	1" Drive x 1-5/16" Deep
I" DR IMPACT SOCKETS	165-03044	3044D	1" Drive x 1-3/8" Deep
Σ	165-03046	3046D	1" Drive x 1-7/16" Deep
Ä	165-03052	3052D	1" Drive x 1-5/8" Deep
-	165-03054	3054D	1" Drive x 1-11/16" Deep
	165-03056	3056D	1" Drive x 1-3/4" Deep
	165-03060	3060D	1" Drive x 1-7/8" Deep
	165-03323	3323C	1" Drive 1-1/2" Hex x 13/16" Square
	165-30280	3028	1" Drive x 7/8" Std.
	165-30281	3028D	1" Drive x 7/8" Deep
	165-30300	3030	1" Drive x 15/16" Std.
	165-30301	3030D	1" Drive x 15/16" Deep
	165-30320	3032	1" Drive x 1" Std.
	165-30321	3032D	1" Drive x 1" Deep
	165-30361	3036D	1" Drive x 1-1/8" Deep
	165-30362	3036DT	1" Drive x 1-1/8" Deep Thin Wall
	165-30380	3038D	1" Drive x 1-3/16" Deep
	165-30401	3040D	1" Drive x 1-1/4" Deep
	165-30402	3040DT	1" Drive x 1-1/4" Deep Thin Wall
	165-30420	3042DT	1" Drive x 1-5/16" Deep Thin Wall
	165-30481	3048D	1" Drive x 1-1/2" Deep w/Inside Lip
	165-30482	3048DR	1" Drive x 1-1/2" Deep - Standard

	ASCOT NO.	MFG. NO.	DESCRIPTION
	169-01002	1002E	1/4" Drive x 2" Chrome Extension
	169-01003	1003E	1/2" Drive x 3" Extension
S	169-01005	1005E	1/2" Drive x 5" Extension
띮	169-01020	1020A	1/2" Drive Female x 3/4" Male Adapt.
ΑÞ	169-02006	2006E	3/4" Drive x 6" Extension
A P	169-02010	2010A	3/4" Drive Female x 1/2" Male Adapt.
S S	169-02030	2030A	3/4" Drive Female x 1" Male Adapt.
Ö	169-20100	2010E	3/4" Drive x 10" Extension
Ä	169-02013	2013E	3/4" Drive x 13" Extension
EXTENSIONS & ADAPTERS	169-03006	3006E	1" Drive x 6" Extension
	169-03010	3010E	1" Drive x 10" Extension
IMPACT	169-03013	3013E	1" Drive x 13" Extension
=	169-03020	3020A	1" Drive Female x 3/4" Male Adapt.
	169-04010	4010A	#5 Spline Female x 3/4" Male Adapt.
	169-04020	4020A	#5 Spline Female x 1" Male Adapt.

Torque Wrenches & Accessories

PASSENGER CAR AND LIGHT TRUCK TORQUE SOCKETS

• Sockets properly torque wheel nuts to exact factory specs • Prevents warping of rotors, which causes brake pulsation • Eliminates broken studs and nuts • Avoids damage to aluminum alloy wheels • Stops customer complaints about over-tightened lug nuts • Strobe marks stop turning at the CORRECT torque



	ASCOT NO.	MFG. NO.	DESCRIPTION
	495-30322	KTI30322A	10-Piece 1/2" Drive Torque Socket Set. SET INCLUDES: Green, Red, Yellow, Blue, Grey, Light Brown, Brown, White, Turquoise, Light Green
	495-30323	KTI30323A	10-Piece 1/2" Torque Sticks For Auto and Light Truck. SET INCLUDES: Mud, Off-White, Light Yellow, Light Tan, Quartz, Red Orange, Charcoal, Orange, Light Blue, Light Purple
	495-30950	KTI30950	5-Piece 1/2" Drive Torque Socket Set. SET INCLUDES: Grey, Light Brown, White, Turquoise, Charcoal
	495-30960	KTI30960	6-Piece 1/2" Drive Torque Socket Set. SET INCLUDES: Green, Red, Yellow, Off White, Light Yellow, Orange"

ASCOT NO.	MFG. NO.	DESC.	DRIVE	SIZE	TORQUE	OTHER
	PASSENGE	R CAR & LIGHT TRU	JCK TORQUE	SOCKETS: KIT CO	ONTENTS	
495-30304	KTI30304A	Green	1/2"	17mm	55 ft./lb.	
495-30305	KTI30305A	Red	1/2"	17mm	80 ft./lb.	
495-30306	KTI30306A	Yellow	1/2"	19mm (3/4")	65 ft./lb.	Deep Well
495-30307	KTI30307A	Blue	1/2"	19mm (3/4")	80 ft./lb.	Deep Well
495-30308	KTI30308A	Grey	1/2"	19mm (3/4")	100 ft./lb.	
495-30309	KTI30309A	Black	1/2"	21mm	60 ft./lb.	
495-30310	KTI30310A	Light Brown	1/2"	21mm	80 ft./lb.	
495-30311	KTI30311A	Brown	1/2"	21mm	100 ft./lb.	
495-30312	KTI30312A	White	1/2"	22mm (7/8")	120 ft./lb.	Deep Well
495-30313	KTI30313A	Turquoise	1/2"	22mm (7/8")	140 ft./lb.	Deep Well
495-30327	KTI30327A	Light Blue	1/2"	22mm (7/8")	100 ft./lb.	
495-30328	KTI30328A	Charcoal	1/2"	21mm	147 ft./lb.	Deep Well
495-30329	KTI30329A	Off White	1/2"	17mm	90 ft./lb.	
495-30334	KTI30334A	Light Yellow	1/2"	17mm	113 ft./lb.	
495-30336	KTI30336A	Orange	1/2"	22mm (7/8")	75 ft./lb.	
495-30337	KTI30337A	Dark Green	1/2"	22mm (7/8")	60 ft./lb.	
495-30338	KTI30338	Pearl Copper	1/2"	22mm (7/8")	110 ft./lb.	
495-30339	KTI30339	Pink	1/2"	22mm (7/8")	154 ft./lb.	
495-30340	KTI30340A	Mud	1/2"	14mm	80 ft./lb.	
495-30341	KTI30341A	Quartz	1/2"	19mm (3/4")	120 ft./lb.	
495-30342	KTI30342A	Light Tan	1/2"	19mm (3/4")	90 ft./lb.	
495-30343	KTI30343A	Red Orange	1/2"	21mm	110 ft./lb.	
495-30898	KTI30898A	Light Purple	1/2"	21mm	160 ft./lb.	
495-30899	KTI30899A	Light Green	1/2"	24mm	140 ft./lb.	Deep Well
495-30912	KTI30912	Purple	1/2"	19mm (3/4")	110 ft./lb.	Deep Well

HEAVY DUTY TRUCK TORQUE EXTENSIONS



- Heavy duty truck extensions can convert sockets into Torque Sockets
- Available in 3/4" and 1" drives



Heavy Duty Truck Torque Extensions

ASCOT NO.	MFG. NO.	DESCRIPTION
495-16000	LT1600M	3/4" Dr. Truck Torque Extension - 475 ft./lb.
495-16001	LT1600N	3/4" Dr. Truck Torque Extension - 250 ft./lb.
495-16002	LT1600Q	3/4" Dr. Truck Torque Extension - 175 ft./lb.
495-16003	LT1600U	3/4" Dr. Truck Torque Extension - 350 ft./lb.
495-16014	LT1600P	1" Drive Truck Torque Extension - 475 ft./lb.
495-16015	LT1600R	1" Drive Truck Torque Extension - 250 ft./lb.
495-16016	LT1600S	1" Drive Truck Torque Extension - 350 ft./lb.
495-16017	LT1600T	1" Drive Truck Torque Extension - 175 ft./lb.

169-13413



3/4" X 1" X 13" TORQUE WRENCH EXTENSION

ASCOT NO.	MFG. NO.	DESCRIPTION
169-13413	13413E	3/4" Dr. x 1" Dr. x 13" Impact Extension
168-12997	12297	3/4" Drive Block for Flex Hinge Torque Wrench
168-12999	12299	1" Drive Block for Flex Hinge Torque Wrench





168-02880

MEDIUM/HEAVY DUTY **TORQUE SOCKETS**

· Sockets properly torque wheel nuts to exact factory specs • Prevents warping of rotors, which causes brake pulsation • Eliminates broken studs and nuts • Avoids damage to aluminum alloy wheels • Stops customer complaints about overtightened lug nuts • Strobe marks stop turning at the CORRECT torque • Includes heavy duty case





ASCOT NO.	MFG. NO.	DESCRIPTION
495-30400	KTI30400A	4-Piece Heavy Duty Truck Torque Socket Set. SET INCLUDES: HD Red, HD Brown, HD Black and HD Yellow
495-30940	KTI30940	4-Piece 1" Drive Truck Torque Socket Set. SET INCLUDES: 1-1/4" 1" Drive Torque Hex 250 ft./ lb. Red, 33mm 1" Drive Torque Hex 475 ft./lb. Brown, 1-1/2" 1" Drive Torque Hex 475 ft./lb. Black; 13/16" 1" Drive Torque Sq. 475 ft./lb. Yellow

ASCUI NO.	MFG. NO.	DESC.	DRIVE	SIZE	TORQUE	OTHER
М	EDIUM/HEA	VY DUTY T	ORQUE S	OCKETS: k	IT CONTENT	S
495-30908	KTI30908A	HD Red	1"	1-1/4"	250 ft./lb.	
495-30909	KTI30909A	HD Brown	1"	33mm	475 ft./lb.	
495-30910	KTI30910A	HD Black	1"	1-1/2"	475 ft./lb.	
495-30911	KTI30911A	HD Yellow	1"	13/16"	475 ft./lb.	
495-30913	KTI30913A	HD Grey	1"	33mm	550 ft./lb.	
495-30914	KTI30914A	HD Grey	1"	33mm	550 ft./lb.	Extended
495-30918	KTI30918A	HD Red	3/4"	1-1/4"	250 ft./lb.	
495-30919	KTI30919A	HD Brown	3/4"	33mm	475 ft./lb.	

⚠WARNING: For more information go to www.P65Warnings.ca.gov.



10-PIECE 1/2" DRIVE TORQUE LIMITING SOCKET SET



DESCRIPTION ASCOT NO. MFG. NO

10-Piece Torque Limiting Socket Set 168-02880 12880

ASCOT NO. MFG. NO. DESCRIPTION

10-PIECE 1/2" DRIVE TORQUE LIMITING SOCKET SET: KIT CONTENTS				
168-21755	121755M	1/2" Drive 17mm - 55 ft./lb. Torque Socket - Green		
168-21780	121780M	1/2" Drive 17mm - 80 ft./lb. Torque Socket - Red		
168-21910	121910M	1/2" Drive 19mm (3/4") - 100 ft./lb. Torque Socket - Gray		
168-21965	121965M	1/2" Drive 19mm (3/4") - 65 ft./lb. Torque Socket - Yellow		
168-21980	121980M	1/2" Drive 19mm (3/4") - 80 ft./lb. Torque Socket - Blue		
168-22180	122180M	1/2" Drive 21mm - 80 ft./lb. Torque ocket - Light Brown		
168-22212	122212M	1/2" Drive 22mm (7/8") - 120 ft./lb. Torque Socket - White		
168-22214	122214M	1/2" Drive 22mm (7/8") - 140 ft./lb. Torque Socket - Turquoise		
168-22610	122610	1/2" Drive 13/16" - 100 ft./lb. Torque Socket - Brown		
168-23014	123014	1/2" Drive 15/16" - 140 ft./lb. Torque Socket - Light Green		

1/2" DRIVE 22MM **TORQUE SOCKETS** • Constructed from heat treated spring steel • Solid one-piece construction • Deep well 168-22110 ASCOT NO. MFG. NO. DESCRIPTION 168-22110 122110M 1/2" Drive 22mm 110 ft./lb. Torque Socket - Copper APPLICATIONS: Buick LaCrosse 2010+, Regal 2011+, Cadillac XTS 2011+, Chevrolet Camaro 2011+, Saab 9-4X 2010+ 168-12254 122115M 1/2" Drive 22mm 154 ft./lb. Torque Socket - Pink APPLICATIONS: Toyota Land Cruiser 2004-06, 2008+, Tundra 168-12254



Torque Wrenches & Accessories (cont.)

2022 LUG NUT TORQUE APPLICATION CHART

- Wall chart measuring 26-3/4" x 39-1/4" Provides lug nut specifications for cars and light trucks to Model Year 2022 • For use with Original Equipment wheels • Laminated for durability
- Shipped in a protective mailing tube

*Appearance of chart may vary



ASCOT LUG NUT TORQUE CHART 2022 0.00 Fee 0.00 0 0.00 Fee 0.00 0 0.00 Fee 0.00 0

168-02022

ASCOT NO. MFG. NO. DESCRIPTION

TC2022 Lug Nut Torque Application Chart

1/2" DRIVE TORQUE WRENCH

- Dual direction Locking collar prevents accidental setting adjustment • Easy-to-read laser marked scale • Blow molded case with calibration certificate
- RANGE: 25-250 ft./lb. OVERALL LENGTH: 25"

ASCOT NO.

MFG. NO.

DESCRIPTION 1/2" Drive Torque Wrench 68-00425

-00250

1/4" DRIVE TORQUE WRENCH

- Easy-to-read and set for error-free adjustments
- Automatic locking torque adjustment Ideal for TPMS applications • Blow molded case • RANGE: 10-150 in./lbs.



ASCOT NO.

MFG. NO.

DESCRIPTION

168-00652

AS-652H 1/4" Drive Torque Wrench

SPLIT BEAM TORQUE WRENCHES

• +/-4% accuracy • Non coil-spring mechanism, no need to return to zero after use, which results in longer tool life • Knob-type torque adjustment for faster and energy saving efficiency • Torque setting easily read through the window scale • TPR cushion handle is oil resistant, the handle provides comfort and ease of control • Loud click sound and strong impulse when required torque is reached





ASCOT NO.	MFG. NO.	DESCRIPTION
168-00250	250-SB	1/2" Drive 250 ft./lb. Split Beam Torque Wrench
168-00600	600-SB	3/4" Drive 600 ft./lb. Split Beam Torque Wrench

FLEX HINGE STYLE TORQUE WRENCH

- Robust construction ACCURATE RESULTS: ±4%
- Adjustable torque settings DUAL SCALED: ft./lb. and N.m • The large break angle improves accuracy by reducing the possibility of over-torquing • Cam control of the mechanism gives a controlled break • Every wrench supplied with a calibration certificate • Durable storage case • 2 ADAPTERS INCLUDED: 3/4" to 1", 3/4" to 3/4"

MFG. NO. ASCOT NO 168-60011 60011

DESCRIPTION

600 ft./lb. Flex Hinge Style Torque Wrench





1" DRIVE TRUCK **TORQUE EXTENSIONS**

- 1" drive square ends
- Once the proper torque is reached the extension will absorb any excess torque



ASCOT NO.	ITEM	MFG. NO.	DESCRIPTION
495-16004	Α	1600-P	1" Drive 475 ft./lb. Torque Limiting Extension
495-16005	В	1600-R	1" Drive 250 ft./lb. Torque Limiting Extension
495-16006	С	1600-S	1" Drive 350 ft./lb. Torque Limiting Extension
495-16007	D	1600-T	1" Drive 175 ft./lb. Torque Limiting Extension
495-16008	Е	1600-W	1" Drive 650 ft./lb. Torque Limiting Extension
495-16009	F	1600-Y	1" Drive 550 ft./lb. Torque Limiting Extension

167-01721

ASCOT 4 & 6-PIECE WHEEL TORQUE **WRENCH SET**

• One-way, not bi-directional

• +/- 4% accuracy • Cushioned ratchet head • Color coded presets





ASCOT NO.	MFG. NO.	DESCRIPTION
168-13000	13000	4-Piece Preset Wheel Torque Wrench Set
168-16000	16000	6-Piece Preset/Adjustable (5 Preset - 1 Adjustable) Wheel Torque Wrench Set

ASCOT NO. DESCRIF	IPTION
-------------------	--------

	ASCOT 4-PIECE KIT CONTENTS
168-12080	80 ft./lb. Preset Torque Wrench - Blue
168-12100	100 ft./lb. Preset Torque Wrench - Gray
168-12120	120 ft./lb. Preset Torque Wrench - White
168-12140	140 ft./lb. Preset Torque Wrench - Aqua
163-91217	1/2" Dr. x 17mm Chrome Socket
163-91219	1/2" Dr. x 19mm Chrome Socket
163-91221	1/2" Dr. x 21mm Chrome Socket
163-91234	1/2" Dr. x 3/4" Chrome Socket
163-91236	1/2" Dr. x 13/16" Chrome Socket
163-91278	1/2" Dr. x 7/8" Chrome Socket
169-12006	Wall Board

ASCOT NO.	DESCRIPTION

	ASCOT 6-PIECE KIT CONTENTS
168-12065	65 ft./lb. Preset Torque Wrench - Yellow
168-12080	80 ft./lb. Preset Torque Wrench - Blue
168-12100	100 ft./lb. Preset Torque Wrench - Gray
168-12120	120 ft./lb. Preset Torque Wrench - White
168-12140	140 ft./lb. Preset Torque Wrench - Aqua
163-91217	1/2" Dr. x 17mm Chrome Socket
163-91219	1/2" Dr. x 19mm Chrome Socket
163-91221	1/2" Dr. x 21mm Chrome Socket
163-91234	1/2" Dr. x 3/4" Chrome Socket
163-91236	1/2" Dr. x 13/16" Chrome Socket
163-91278	1/2" Dr. x 7/8" Chrome Socket
168-12106	1/2" Dr. x 6" Chrome Extension
168-12250	250 ft./lb. Single Direction Micro-Adjustable Torque Wrench
169-12006	Wall Board
168-96509	1/2" Preset Torque Wrench Repair Kit

1/2" DR 3-PIECE IMPACT **TORQUE SOCKET SET**

• Thicker design provides superior strength and durability • Prevents risk of nut damage • Weight is reduced by 20% • Torque design extends product's service life • Protects wheel rim from abrasion

ASCOT NO. MFG. NO. DESCRIPTION 167-01721 ITS3 1/2" DR 3-Piece Impact Torque Socket Set



• Set includes all 5 extension sockets listed below • Provides the ability to torque wheel nuts on passenger cars to the correct specification • Set comes in a durable plastic blow molded case • Individual extensions sold separately

168-12450

ASCOT NO. MFG. NO. DESCRIPTION 168-12450 2450 1/2" DR 5-Piece Torque Extension Set

ASCOT NO. MFG. NO. DESCRIPTION

1/2" DR 5-PIECE TORQUE EXTENSION SET: KIT CONTENTS		
168-12465	2465	65 ft./lb. Extension - Yellow
168-12480	2480	80 ft./lb. Extension - Blue
168-12410	24100	100 ft./lb. Extension - Gray
168-12412	24120	120 ft./lb. Extension - White
168-12414	24140	140 ft./lb. Extension - Aqua

▲WARNING: For more information go to www.P65Warnings.ca.gov.



Torque Wrenches & Accessories (cont.)



1" BLUE TORK

• Two pneumatic motors for rundown and final tightening • Preset and adjustable shut off for torque control • ERGONOMICS: Very low noise level, virtually no vibration • EFFICIENCY: Precise and accurate tightening, less fatigued operators • ENVIRONMENT IMPROVEMENTS: by increasing durability of the tools, we reduce waste • QUALITY: Precise, accurate tightening to the manufacturer's recommended torque and angle specifications • MAXIMUM TORQUE: 660 ft./lb.







ASCOT NO.	MFG. NO.	DESCRIPTION
168-07600	CP-7600xB	Non-Reversible Single Torque Preset
168-07602	CP-7600xB-R	Reversible Single Torque Preset
168-07603	CP-7600vR-R4P	Reversible / Torque Preset Selector

FRL UNIT FOR BLUE TORK

• INCLUDES: Industrial grade filter; Regulator; Single point lubricator; 25' hose with capillary tube; 1 Quart of special tool oil approved for the Blue Tork



ASCOT NO.	MFG. NO.
117-58625	586-254-1000

DESCRIPTION
FRL Unit for Blue Tork

117-58625

PRESET TRUCK CLICKER STYLE TORQUE WRENCH

Preset at 475 ft./lb. • Designed for fleet applications • Massive 4-1/2' length for high torque applications • Supplied with handy storage bag for sockets and extensions

• Both the wrench and the bag have reflective strips for safe highway night use

NU CONTE	
MASSIVE 4-1/2' LENGTH	FOR FLEET APPLICATIONS
ELIVOITI	

ASCOT NO.	MFG. NO.	DESCRIPTION
168-47501	1-475	1" Drive x 475 ft./lb. Preset Torque Wrench
168-96111	9610-0111RK	1" Torque Wrench Repair Kit

168-12250

MICRO-ADJUSTABLE TORQUE WRENCH

Dual scale, calibrated dual direction • Positive lock with spring loaded pull down lock ring • Fast, accurate and easy to set • Easy-to-read Laser marked scale • Ergonomic comfort-grip • Most feature Quick Release buttons which provide good socket retention as well as easy socket removal • RANGE: 50-250 ft./lb. • ACCURACY: ± 4% clockwise ± 6% CCW of indicated value, CW, from 20% to 100% of full scale

ASCOT NO.

MFG. NO.

DESCRIPTION

168-12250 2503MFRRH 1/2" Drive Micro-Adjustable Torque Wrench



SCALE



PRESET VALVE NUT TORQUE WRENCHES

- Wrench flexes when proper torque setting is reached
- Prevents overtightening of the valve grommet
- Cushioned handle
- Sizes and preset torque settings laser etched on shaft
- +/- 4% accuracy

ASCOT NO.	MFG. NO.	DESCRIPTION
168-00058	NSPTW58	5/8" Preset Torque Wrench for TR540-550 Series Valve Hex Nuts
168-00916	NSPTW916	9/16" Preset Torque Wrench for TR570 Series Valve Hex Nuts






168-60011

⚠WARNING: For more information go to www.P65Warnings.ca.gov.

FLEX HINGE STYLE TORQUE WRENCH

• Robust construction • ACCURATE RESULTS: +/-4% • Adjustable torque settings • DUAL SCALED: ft./lb. and NM • The large break angle improves accuracy by reducing the possibility of over torquing • Cam control of the mechanism gives a controlled break

• Every wrench supplied with a calibration certificate • Durable storage case









168-60025



TORQIT BATTERY-POWERED TORQUE WRENCH

- Durable and Portable Precision Torque Four models from 120 ft./ lb. to 3.000 ft./lb. • LITHIUM ION 8.0 AH RECHARGEABLE BATTERY: Full charge in under 60 minutes • Every Unit Calibrated In ISO17025 Laboratory
- 13-Month Warranty from date of purchase MADE IN THE USA



ASCOT NO. MFG. NO. DESCRIPTION

168-67510 67510 Torqlt Battery-Powered Torque Wrench

TORQUE FIN TORQUE WRENCH STABILIZER

• Links with, stabilizes, and properly aligns manual torque wrenches to ensure accurate torque • Saves time and money • Easy to use • Reduces risk of injury and liability due to wheel-off accidents • Works with most commercial torque wrenches and truck tires • Durable and lightweight



ASCOT NO. 168-67250

MFG. NO. 67250

Torque Fin Torque Wrench Stabilizer



Torque Wrenches & Accessories (cont.)

INDUSTRIAL TORQUE WRENCH

• Norbar's New Industrial Torque Wrench • SPLIT DESIGN: Allows for easy, behind-the-seat storage in service vehicles • SMALLER CARRYING CASE: Easy to transport, and less expensive to ship back-and-forth for calibration and service • Removal of calibrated nuts means less expensive to calibrate • Adjusting scale in the handle is large and easy to read • Calibration is as easy as replacing the paper scale with a new paper scale • Ratchets are no longer a welded component, making them replaceable when worn or damaged - this means fewer wrenches scrapped • Operator handle designed to 'quide' the technicians hand into the proper position



Norbar's Industrial Torque Wrench in use.







168-42760

ASCOT NO.	MFG. NO.	DESCRIPTION
168-42760	120110	4AR-N, 3/4" Drive, 150-600 ft./lb. Range
168-42761	120110.01	4AR-N, 1" Drive, 150-600 ft./lb. Range
168-57600	120115	5R-N, 3/4" Drive, 200-750 ft./lb. Range
168-57601	120115.01	5R-N, 1" Drive, 200-750 ft./lb. Range

PNEUMATIC TORQUE MULTIPLIER

• OPERATING RANGE: 147 to 738 ft./lb. (200 to 1000 Nm) • 'Soft Start' trigger control aids socket location, and allows gradual and safe reaction location • Extended reaction is ideal for reaching recessed nuts • FAST: 1000 Nm version has a free speed of 140 rpm for rapid bolt run-down • For safety, gearbox can rotate independently from the handle so that reaction forces are not transmitted back to the operator • Light weight for ease of handling • NON IMPACTING: Low vibration levels make these tools comfortable and safe to use • On Bi-Directional tools, the direction control knob is locked while the tool is running to prevent accidental damage to the gearbox • QUIET: Less than 85 dB(A) when under load • Square drive is quickly and easily replaceable



ASCOT NO. 168-18141 MFG. NO.

PTME-72-2000-B 1"

DESCRIPTION

1" Square Drive Bi-Directional Pneumatic Multiplier

NORBAR TRUCHECK2

- Allows torque tool performance to be monitored and tools kept in peak condition
- Limited settable options, Ideal for non-expert users with click type torque wrenches
- Inbuilt Micro USB 2.0 port enables power from any USB power source
- Software can be updated remotely, without the need to return the product to Norbar
- Supplied with traceable calibration certificate in clockwise direction. A

counter-clockwise calibration is available at additional cost

ASCOT NO.

MFG. NO.

DESCRIPTION

168-43528 43528

Norbar TRUCHECK2 Torque Wrench Checker





PRECISION INSTRUMENTS

MICROMETER TORQUE WRENCHES

- EXTREMELY ACCURATE: Within 3% of reading from 20% of full scale to full scale clockwise and counter-clockwise
- EXCLUSIVE PATENTED CALIBRATION MECHANISM: This patented mechanism allows for calibration in both the clockwise and counter-clockwise directions, plus with regard to spring rate, without the disassembly of the wrench. This protects against contamination of the working mechanism, and make calibration quick and easy
- EXCLUSIVE PATENTED ROLLER-RELEASE: This patented feature removes over 95% of the friction inherent in other click wrenches thereby extending life and providing for more reliable operation. • ALL "M" SERIES MEETS OR EXCEEDS ALL APPLICABLE REQUIREMENTS OF: ANSI / ASME B107.14M, GGG-W-00686C, BS6073: 1988, IS06789

ASCOT NO.	MFG. NO.	DESCRIPTION
168-01200	M1R200H	1/4" Drive
168-02101	M2R100F	3/8" Drive
168-03252	M3R250F	1/2" Drive

SPLIT-BEAM CLICK TORQUE WRENCHES

• EXTREMELY ACCURATE: within 4% of reading from 20% of full scale to full scale • Setting torque on adjustable wrenches is fast and easy because there is no spring tension on the adjustment knob • Torque setting locks on adjustable wrenches for repetitive applications • Wrench length designed to provide the leverage required for maximum torque applications. Also provides the needed reach for those hard to get at places

ASCOT NO.	MFG. NO.	DESCRIPTION	FT./LB.
168-02100	C2FR100F	3/8" Drive	100
168-03250	C3FR250F	1/2" Drive	250
168-03251	CP3FR250F	1/2" Preset	250
168-04400	C4D600F	3/4" Drive	600
168-05600	C5D600F	1" Drive	600





MICROMETER TORQUE WRENCH

- Range is 25 to 250 ft./lb. HEAVY DUTY RATCHET: Fewer and stronger teeth UNIDIRECTIONAL TORQUEING: Tightens in right hand direction only, does not tighten in left hand direction for improved performance
- ERGONOMICALLY DESIGNED HANDLE MADE FROM MODIFIED SILICONE: Tear resistant, oil and solvent resistant
- Protective head cover made from modified silicone Comes in plastic storage case MADE IN USA

ASCOT NO.	MFG. NO.	DESCRIPTION
168-97354	97354A	Micrometer Torque Wrench: 25-250 ft./lb.

MICROMETER TORQUE WRENCHES

- Push-through ratchet instead of a reversible ratchet Asymmetric design of clicker and ratchet mechanism creates a more robust construction and durable wrench • Improved lock collar design is easier to grip
- ACCURACY: +/- 4% in both directions and improves impact resistance MADE IN USA

ASCOT NO.	MFG. NO.	RANGE (INCREMENT)	DRIVE
495-97353	CEN97353A	30-250 ft./lb.	1/2" push-through drive
495-97355	CEN97355A	100-600 ft./lb.	3/4" push-through drive
495-97362	CEN97362	30-150 ft./lb.	1/2" flex head push-through drive
495-97352	CEN97352A	20-100 ft./lb.	3/8" flex head push-through drive
495-97351	CEN97351A	20-250 in./lb.	3/8" push-through drive
495-97361	CEN97361B	20-200 in./lb.	1/4" push-through drive





WHAT IS TORQUE?

Torque is the measurement of twisting force that is applied to a lug nut to create bolt tension.

WHAT IS CLAMPING FORCE?

Clamping force is the result of bolt tension and it is the physical property that holds the wheels on the vehicle.

DOES THE CORRECT TOROUE GUARANTEE THE CORRECT CLAMPING FORCE?

No. Clamping force cannot be measured in the field, so technicians must use the correct torque to approximate the amount of clamping force.

Since there are a number of factors that determine how much clamping force is generated per foot pound of torque, technicians should always follow the RIST procedure developed by the Tire Industry Association (TIA).



stands for remove debris from mating surfaces





stands for inspect all of the components





stands for snug the lug nuts in a star pattern





stands for torque the fasteners to specification



Hub-Pilot Wheel: 450-500 ft/lbs. oiled | Stud-Pilot Wheel: 450-500 ft/lbs. dry | Demountable Rim: 200-260 ft/lbs. dry

TOROUE SPECIFICATIONS

TIA is the industry leader in commercial truck tire and wheel service education. Since Occupational Safety and Health Administration (OSHA) Regulation 29 CFR 1910.177 requires training for all employees that service truck tires, fleets must make sure that every technician who installs, removes or handles truck tires in any way has compliant training. TIA developed the Fleet Tire Service OSHA Compliance Program so the trucking industry could provide in-house technician training that exceeds the minimum requirements established by 29 CFR 1910.177.

For more information on TIA training or the RIST procedure, visit TIA's website: http://www.tireindustry.org/training.asp or call 800-876-8376, ext. 106.



DESCRIPTION

Loose Nut Prevention





CHECKPOINT LOOSE LUG NUT INDICATORS*

- A simple and cost-effective solution that helps prevent a catastrophic loss caused by loose lug nuts when used as part of a total torque program
- When fitted on properly torqued lug nuts and inspected by a driver or technician, CHECKPOINT clearly and visually indicates if the wheel nuts have moved
- · If the arrows have moved from the point-topoint or daisy-chain pattern, this indicates that they have loosened and need attention
- · Facilitates the driver's check for lug nut movement
- · Early warning for mechanic or driver of excessive heat caused by possible brake or bearing problems; designed to melt in excessive heat
- Demonstrates fleet's commitment to vehicle road worthiness and safety to the public



ASCOT NO.

MFG. NO.





	CH	ECKPOINT
402-20017	CPY17MM	CHECKPOINT 17mm Fluorescent Yellow Loose Lug Nut Indicator
402-20018	CPY18MM	CHECKPOINT 18mm Fluorescent Yellow Loose Lug Nut Indicator
402-20019	CPY19MM	CHECKPOINT 19mm Fluorescent Yellow Loose Lug Nut Indicator
402-20020	CPY20MM	CHECKPOINT 20mm Fluorescent Yellow Loose Lug Nut Indicator
402-20021	CPY21MM	CHECKPOINT 21mm Fluorescent Yellow Loose Lug Nut Indicator
402-20078	CPY22MM	CHECKPOINT 22mm (7/8") Fluorescent Yellow Loose Lug Nut Indicator
402-20023	CPY23MM	CHECKPOINT 23mm Fluorescent Yellow Loose Lug Nut Indicator
402-20024	CPY24MM	CHECKPOINT 24mm Fluorescent Yellow Loose Lug Nut Indicator
402-20001	CPY25MM	CHECKPOINT 25mm (1") Fluorescent Yellow Loose Lug Nut Indicator
402-20026	CPY26MM	CHECKPOINT 26mm Fluorescent Yellow Loose Lug Nut Indicator
402-20027	CPY27MM	CHECKPOINT 27mm Fluorescent Yellow Loose Lug Nut Indicator
402-20028	CPY28MM	CHECKPOINT 28mm Fluorescent Yellow Loose Lug Nut Indicator
402-20029	CPY29MM	CHECKPOINT 29mm Fluorescent Yellow Loose Lug Nut Indicator
402-20030	CPY30MM	CHECKPOINT 30mm Fluorescent Yellow Loose Lug Nut Indicator
402-20114	CPY31MM	CHECKPOINT 31mm (1-1/4") Fluorescent Yellow Loose Lug Nut Indicator
402-20032	CPY32MM	CHECKPOINT 32mm Fluorescent Yellow Loose Lug Nut Indicator
402-20033	CPY33MM	CHECKPOINT 33mm Fluorescent Yellow Loose Lug Nut Indicator
402-20034	CPY34MM	CHECKPOINT 34mm Fluorescent Yellow Loose Lug Nut Indicator
402-20035	CPY35MM	CHECKPOINT 35mm Fluorescent Yellow Loose Lug Nut Indicator
402-20036	CPY36MM	CHECKPOINT 36mm Fluorescent Yellow Loose Lug Nut Indicator
402-20015	CPY38MM	CHECKPOINT 38mm (1-1/2") Fluorescent Yellow Loose Lug Nut Indicator
402-20040	CPY40MM	CHECKPOINT 40mm Fluorescent Yellow Loose Lug Nut Indicator
402-20041	CPY41MM	CHECKPOINT 41mm Fluorescent Yellow Loose Lug Nut Indicator
402-20044	CPY44MM	CHECKPOINT 44mm Fluorescent Yellow Loose Lug Nut Indicator
402-20046	CPY46MM	CHECKPOINT 46mm Fluorescent Yellow Loose Lug Nut Indicator

*The use of CHECKPOINT Loose Lug Nut Indicators does not guarantee wheel-offs will not occur.


⚠WARNING: For more information go to www.P65Warnings.ca.gov.



Loose Nut Prevention (cont.)



ASCOT NO.	MFG. NO.	DESCRIPTION	ASCOT NO.	MFG. NO.	DESCRIPTION
	CHEC	KPOINT HI-TEMP			DUSTITE
402-21019	СРОНҮ19ММ	CHECKPOINT 19mm Orange Hi-Temp Loose Lug Nut Indicator	402-24027	CPDTY27MM	Dustite Yellow 27mm Loose Lug Nut Indicator
402-21021	CPOHY21MM	CHECKPOINT 21mm Orange Hi-Temp Loose Lug Nut Indicator	402-24028	CPDTY28MM	Dustite Yellow 28mm Loose Lug Nut Indicator
402-21022	CPOHY22MM	CHECKPOINT 22mm Orange Hi-Temp Loose Lug Nut Indicator	402-24030	CPDTY30MM	Dustite Yellow 30mm Loose Lug Nut Indicator
402-21030	СРОНҮ30ММ	CHECKPOINT 30mm Orange Hi-Temp Loose Lug Nut Indicator	402-24032	CPDTY32MM	Dustite Yellow 32mm Loose Lug Nut Indicator
402-21031	СРОНҮ31ММ	CHECKPOINT 31mm Orange Hi-Temp Loose Lug Nut Indicator	402-24033	CPDTY33MM	Dustite Yellow 33mm Loose Lug Nut Indicator
402-21032	СРОНҮ32ММ	CHECKPOINT 32mm Orange Hi-Temp Loose Lug Nut Indicator	402-24038	CPDTY38MM	Dustite Yellow 38mm Loose Lug Nut Indicator
402-21033	СРОНҮЗЗММ	CHECKPOINT 33mm Orange Hi-Temp Loose Lug Nut Indicator	402-24133	CPDTSG33MM	Dustite Silver Gray 33mm Loose Lug Nut Indicator
402-21036	СРОНҮ36ММ	CHECKPOINT 36mm Orange Hi-Temp		DUST	ITE LONG REACH
402-21038	СРОНҮ38ММ	CHECKPOINT 38mm Orange Hi-Temp	402-25032	CPDTLRY32MM	Dustite Long Reach Yellow 32mm Loose Lug Nut Indicator
402-21040	CPOHY40MM	CHECKPOINT 40mm Orange Hi-Temp	402-25033	CPDTLRY33MM	Dustite Long Reach Yellow 33mm Loose Lug Nut Indicator
402-21041	CPOHY41MM	CHECKPOINT 41mm Orange Hi-Temp	402-25133	CPDTLRSG33MM	Dustite Long Reach Silver Gray 33mm Loose Lug Nut Indicator
402-21044	СРОНУ44ММ	CHECKPOINT 44mm Orange Hi-Temp	402-25021	CPDTLRY21MM	Dustite Long Reach Yellow 21mm Loose Lug Nut Indicator
402-21046	СРОНҮ46ММ	Loose Lug Nut Indicator CHECKPOINT 46mm Orange Hi-Temp Loose Lug Nut Indicator	402-25022	CPDTLRY22MM	Dustite Long Reach Yellow 22mm Loose Lug Nut Indicator
	PC	DINT TO POINT			
402-20133	СРСҮРРЗЗММ	CHECKPOINT Caution Yellow Point to			
402-20333	CPTRPP33MM	Point 33MM Loose Lug Nut Indicator CHECKTORQUE Point to Point 33MM Red Loose Lug Nut Indicator			
402-23133	СРОНТРРЗЗММ	Checkpoint Point to Point 33MM Orange			
		Hi-Temp Loose Lug Nut Indicator			
	Q	SHEWAWY.	DUCTIF		
		CHECKPOINT	DUSTITE		DUSTITE LONG REACH







ROLLOCK - LOOSE NUT PREVENTION

- Cost effective way to prevent wheel nuts from loosening
- Galvanized steel product locks wheel nuts in place APPLICATION: ROLLOCK is for use on 19.5 & 22.5 Hub-Piloted Wheels (8 or 10 hole) • ROLLOCK IS EASY TO REMOVE: Unscrew the Wheel Nut in normal manner and the ROLLOCK clamp will easily come off

LUG LOCK WHEEL NUT RETAINERS

- Use the resistance between two nuts to minimize their ability to rotate and loosen • Flexible and easy to install, fits over two adjacent nuts • Field tested at high and low rotation levels • Lab tested in severe vibration conditions
- APPLICATION: Designed to be used on wheels with 33mm nuts on 3.5" stud centers • Compatible with a complete wheel mounting safety program • Other sizes and colors available











The Rollock is a cost effective way to prevent nuts from loosening.

▲WARNING: For more information go to www.P65Warnings.ca.gov.





The Lug Lock Wheel Nut Retainers in use.

ASCOT NO.	MFG. NO.	DESCRIPTION
402-62000	62000	Rollock, 4-1/8" Spacing, 30-33mm Nut
402-62500	62500	Rollock, 3-1/2" Spacing, 30-33mm Nut

ASCOT NO. MFG. NO. 402-62600 62600

DESCRIPTION 3 1/2" Spacing, 350 degrees






Wheel Centering Products

WHEEL CENTERING PRODUCTS FOR HUB PILOTED WHEELS

- 1 Increases fuel mileage
- 2 Increases tire life
- 3 Decreases tire vibration
- 4 Cuts rebalancing costs
- 5 Reduces "wheel-off" condition
- 6 Reduces tire cupping

Wheel Vibrations? Wheel Hop? Brake Pedal Pulsations? Erratic Tire Wear? Excessive Fuel Consumption?

If you are experiencing these problems, it may be because your wheels aren't centered on the hub. And if your wheels aren't centered, you will continue to experience these problems. With Specialty Products' Wheel Centering Products, you can re-center your wheel, and eliminate all of these problems.

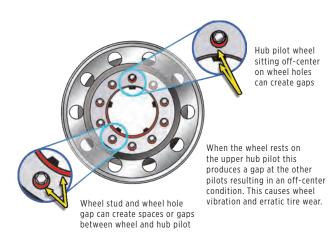

How it works

If your hub piloted wheel is sitting on the hub stud off-center (as shown in the illustration to the left) you need these parts and tools to avoid wheel hop and excess tire wear, and to increase your fuel mileage. The theory behind the hub pilot is it centers the wheel. The fact is gravity causes the weight of the wheel to rest only on the upper pilots creating a gap in the bottom pilots. Even the smallest gap results in an egg shaped motion upon rotation. This uneven motion creates rolling resistance which causes tire vibration, increased fuel consumption and erratic tire wear. The bottom line is, you can't balance an egg.

"EZ ON" WHEEL CENTERING TOOL SET

Simply slide the 3 centering tapered tools over the wheel studs at the 12, 8, and 4 o'clock positions; mount wheel and add lugnuts; remove the tools and replace remaining lugnuts, torquing to manufacturer specifications. The wheel is now completely centered. Problem Solved!

- Threadless Design
- Saves Installation Time
- Tapered Nose Eases Wheel Mounting • Single Set

• APPLICATION: For Steer, Drive & Trailer Axles



Our new threadless design allows the installer to quickly and easily center the wheels to the hub. And our tapered design makes it easy to mount the wheel over the hub.

ASCOT NO.	MFG. NO.	DESCRIPTION
491-32111	32111	"EZ On" Wheel Centering Tool Set

"EZ ON" WHEEL & BRAKE DRUM CENTERING SLEEVES

- These sets center both steer axle HD wheels and brake drums to minimize wheel vibrations, brake pedal pulsations and wheel hop
- APPLICATION: For both Aluminum and Steel steer wheels and a variety of brake drum types







			_
ASCOT NO.	MFG. NO.	DESCRIPTION	491-32124
491-32120	32120	Aluminum 1.25" hole/.5" depth	
491-32121	32121	Aluminium 1.25" hole/.25" to .3125" depth	
401-72124	72124	Stool 1 25" hole / 5" donth	





O-LINE-ER WHEEL STUD ALIGNMENT TOOL

- Makes it easy to line up wheel studs with holes in rim for easy installation • Decreased installation time • Increase worker productivity
- Reduce risk of injury from struggling with heavy tires and rims

O-LINE-ER #GTO-01TB

491-00101

ASCOT NO.

MFG. NO.

DESCRIPTION

491-00101 GTO-01TB O-Line-Er Wheel Stud Alignment Tool





The O-Line-Er Wheel Stud Alignment Tool makes it easy to line up wheel studs with holes in rim for easy installation.

"SOLUTION A" WHEEL **CENTERING PIN SETS**

- Reusable Shop Tool Hardened Steel
- Threaded Inside for Easy Removal
- Sold in sets of 3 with storage case

ASCOT NO.	MFG. NO.	DESCRIPTION
491-02666	A-2666	Steer & Drive axles, 5" length, Steel & Aluminum wheels, will center 1" brake drums
491-01573	A-1573	Steer & Drive axles and some trailers, 4" length, Steel & Aluminum Wheels
491-01339	A-1339	Steer axles, 3" length, Steel & Aluminum wheels







491-01573 491-02666



"SOLUTION B" INTERNAL CENTERING SLEEVES

• Threaded Inside for best positioning and retention • Stays on wheels • Zinc plated to resist corrosion • All brake drum numbers are subject to change without warning due to manufacturer changes beyond our control • Sold in sets of 6 per axle



ASCOT NO.	MFG. NO.	DESCRIPTION		GUNITE#	
491-01504	B-1504-GA	1.25" Diameter Hole,	3573X	3687X	3758X
		1/2" Hole Depth	3596X	3710X	3774X
		3597X	3786X	3800X	
		3598X	3721AX		
			3686X	3726X	

ASCOT NO.	MFG. NO.	DESCRIPTION	CONN	1ET #
491-01825	B-1825-CON-A	1.34-1.37" diameter hole, 1/2" hole depth	107507	1001783
			10005331	10033071
			10005332	10037815
			10009920	

491-01860 B-1860-CON-A 1.28" Diameter Hole, 107164 10001780 65161B 65548B 107193 10001781 65167B 65554B 107453 10001783 61528B 65710B	ASCOT NO.	MFG. NO.	DESCRIPTION	CONN	1ET#	WEE	3B #
107193 10001781 65167B 65554B 65710B	491-01860	B-1860-CON-A		107164	10001780	65161B	65548B
			1/2" Hole Depth	107193	10001781	65167B	65554B
107862 65547R				107453	10001783	61528B	65710B
107002				107862		65547B	

ASCOT NO.	MFG. NO.	DESCRIPTION	GUNITE #	MOTOR WHEEL CENTRIFUSE #	ARVIN MERITOR #	
491-01594	B-1594-CA	1.25" Diameter Hole,	9001X	90089BK	53-123512-002	
		1/4" Hole Depth	9000X	89870BK	53-123542-002	
			9035X	9035X	90174BK	53-123627-002
				91265B	53-123-589-002	
				90600B	53-123-608-002	
				90137B		



Lug Nut Removal Products

3-PIECE TWIST SOCKET LUG **NUT REMOVAL SYSTEM**

• Removal of damaged 3/4" and 19mm, 13/16" and 21mm lug nuts • Two dual-sided twist sockets have a fluted design which gives the sockets a tight grip to remove the most difficult locking and damaged lug nuts from the socket • Works with 1/2" impact gun or breaker bar

for service calls • Includes an extractor punch





ASCOT NO.	MFG. NO.	DESCRIPTION
492-04200	4200A	Dual Sided Twist Socket Lug Nut Remover
492-04300	4300	3-Piece Twist Socket Lug Nut Removal System

1/2" DR. 4-PIECE FLANK BITE DAMAGED NUT REMOVER SOCKET SET

• INCLUDES THE FOLLOWING SIZES: 17mm, 19mm, 21mm, 22mm



ASCOT NO.
107 22210

MFG. NO. 122019K2 DESCRIPTION

1/2" DR 4-Piece Flank Bite Damaged Nut Remover Socket Set

5-PIECE 1/2" DRIVE TWIST SOCKET SET

- Designed to easily remove damaged, rounded nuts
- Use with 1/2" drive impact wrench or breaker bar
- · CR-MO steel for long life
- · Heavy duty blow molded case
- INCLUDES: 17mm, 19mm, 21mm & 22mm twist sockets plus a 50mm extractor punch



			DESCRIPTION
4	92-00502	TSS5	5-Piece 1/2" Driv

SCOT NO.	MFG. NO.	DESCRIPTION
REPLA	OCKETS FOR TSS5 SET	
92-05021	TSS5-1	17mm Replacement Twist Socket
92-05022	TSS5-2	19mm Replacement Twist Socket
92-05023	TSS5-3	21mm Replacement Twist Socket
92-05024	TSS5-4	22mm Replacement Twist Socket
92-05025	TSS5-5	Twist Socket Set Extractor Punch
	92-05021 92-05022 92-05023 92-05024	92-05021 TSS5-1 92-05022 TSS5-2 92-05023 TSS5-3 92-05024 TSS5-4



1/2" DRIVE DUAL-SIDED SOCKET LUG NUT REMOVER TOOL

• Dual flip 1/2" drive impact design • Removes missing and distorted lug nuts with chrome caps







492-01240

ASCOT NO.	MFG. NO.	DESCRIPTION
492-01240	LT 1240	Chrysler/Dodge 21mm chrome cap lug nuts (21/21.5mm)
492-01250	LT 1250	GM & Chrysler 19mm chrome caps (18.5/19.5mm)
492-01260	LT 1260	Chrysler/Dodge 22mm chrome cap lug nuts (22/22.5mm)

TWIST SOCKET REMOVAL KIT

• This kit easily removes damaged nuts, studs, pipe nipples and bolts • Comes mounted on a 1/2" rail, individually packaged



492-04400

ASCOT NO. MFG. NO. 492-04400

DESCRIPTION

1/2" Drive 6-Piece Twist Socket Removal Kit

5-PIECE LOCKING LUG NUT TWIST SOCKET REMOVAL KIT

- Removes locked or damaged lug nuts without a key • Now in 4 sizes for maximum coverage
- Lug nuts are usually reusable Works with a breaker bar or other related tool • Comes mounted on a 1/2" rail, individually packaged



492-04240

ASCOT NO. MFG. NO. 492-04240

DESCRIPTION

LT 4240 5-Piece Locking Lug Nut Twist Socket Removal Kit





NUT BUDDY LUG NUT REMOVER

• Loosens the most stubborn wheel nuts • APPLICATION: Use on commercial or agricultural wheels • GEAR RATIO: 58:1 • RATED OUTPUT TORQUE: 2950 ft/lbs. • TWO SOCKETS INCLUDED: 1-1/2" (38mm) and 1-5/16" (33mm)



ASCOT NO. MFG. NO. DESCRIPTION

404-67300 67300 Nut Buddy Lug Nut Remover



8-PIECE LUG NUT & WHEEL STUD CHECKER SET

Wheel stud thread size gauge includes both male and female threads for checking lug nuts, wheel locks and wheel studs • Size permanently stamped onto each gauge • Color coded for easy identification



INCLUDES: Purple (M12x1.25), Orange (M12x1.50), Pink (M12x1.75), Black (M14x1.50), Silver (M14x2), Red (9/16x18), Green (7/16x20) & Blue (1/2x20)

ASCOT NO. MFG. NO. DESCRIPTION

493-00801 8TGCS 8-Piece Lug Nut & Wheel Stud Thread Checker Set

SAVE-A-STUD RETHREAD KIT - AUTOMOTIVE

• Damaged studs can be renewed in minutes without removing the caliper, rotor, or stud • A 30-second solution to an hour-long job • Solves the problem of removing and replacing damaged wheel

studs • Lifetime warranty

• Individual sizes also available







ASCOT NO. MFG. NO. DESCRIPTION 493-30100

30100 Save-A-Stud Rethread Kit - INCLUDES: 7/16", 1/2", 9/16", 5/8", 12mm - 1.25", 12mm - 1.5", 14mm - 1.5"

9-PIECE SAVE-A-STUD RETHREAD KIT

· Repairs damaged wheel studs • 9-Piece Rethread Kit • For passenger, light truck, and

· Individual dies available





⚠WARNING: For more information go to www.P65Warnings.ca.gov.

KIT CONTENTS

SAE: 7/16"-20, 1/2"-20, 9/16"-18, 5/8"-18

METRIC: 12mm-1.25, 12mm-1.50, 12mm-1.75, 14mm-1.50, 14mm-2.00

ASCOT NO.

MFG. NO.

DESCRIPTION

493-31210 31210

9-Piece Save-A-Stud Rethread Kit

SAV-A-STUD RETHREAD KIT - TRUCK

· Repairs wheel studs, spindles and standard threaded studs •

Lifetime warranty





ASCOT NO.	MFG. NO.	DESCRIPTION
493-30120	30120	Save-A-Stud Plus Rethread Kit (9 pcs.) - INCLUDES: 9/16" - 18, 5/8" - 18, 14mm - 1.5, 14mm - 2.0, 7/16" x 20, 1/2" - 20 Right, 12mm - 1.25, 12mm - 1.5, 12mm - 1.75
493-30125	30125	Save-A-Stud Plus HD (3 pcs.) - INCLUDES: 3/4" - 16" Right, 3/4" - 16" Left, 22 - 1.5mm





Lug Nut Removal Products (cont.)

16-PIECE LOCKING LUG KEY SET

- Heat treated chrome vanadium steel construction
- Thin wall sockets prevent damage to wheels
- Double hex head design fits most lug wrenches
- Easily removes locking lug nuts
- Extra long lug keys keep your wrench away from the wheel preventing nicks and scratches


· Packed in blow molded case with color sleeve



HEX: 11mm, 12mm, 14mm, 15mm, 16mm, 17mm, 18mm, 19mm, 20mm

SOCKETS INCLUDED: (2) 5/8", 41/64", 45/64", (2) 15/32", 19/32", (2) 11/16", 3/4", 7/16", 5/8", (2) 1/2", 13/16", 9/16"

ASCOT NO.	MFG. NO.	DESCRIPTION
402-01283	CHT1283	16-Piece Locking Lug Key Set
402-28301	1283-1	7-Spline Small Diameter Lug Nut Socket - 3/4" Inner Diameter
402-28302	1283-2	7-Spline Small Diameter Lug Nut Socket - 11/16" Inner Diameter
402-28303	1283-3	7-Spline Small Diameter Lug Nut Socket - 5/8" Inner Diameter
402-28304	1283-4	5-Spline Small Diameter Lug Nut Socket - 5/8" Inner Diameter
402-28305	1283-5	10-Point Star Lug Nut Key - 1/2" Tip Outer Diameter
402-28306	1283-6	8-Point Star Lug Nut Key - 5/8" Tip Outer Diameter
402-28307	1283-7	8-Point Star Lug Nut Key - 7/16" Tip Outer Diameter
402-28308	1283-8	8-Point Star Lug Nut Key - 1/2" Tip Outer Diameter
402-28309	1283-9	6-Spline Small Diameter Lug Nut Socket - 45/64" Inner Diameter
402-28310	1283-10	6-Spline Small Diameter Lug Nut Socket - 41/64" Inner Diameter
402-28311	1283-11	High Tech Hex Lug Nut Key - 15mm Hex Size
402-28312	1283-12	High Tech Hex Lug Nut Key - 9/16" Hex Size
402-28313	1283-13	High Tech Hex Lug Nut Key - 12mm Hex Size
402-28314	1283-14	High Tech Fluted Hex Lug Nut Key - 12mm Hex Size
402-28315	1283-15	12-Spline Small Diameter Lug Nut Socket - 13/16" Inner Diameter
402-28316	1283-16	12-Spline Small Diameter Lug Nut Socket - 11/16" Inner Diameter

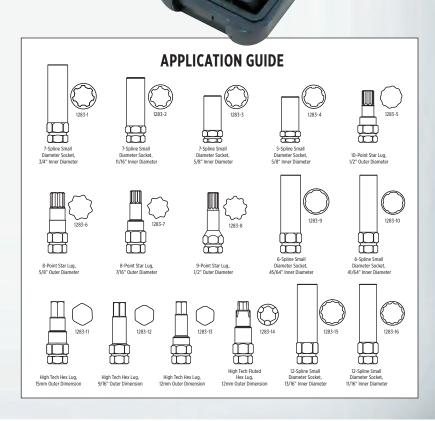



E 4Ken-Tool[®]

4-PIECE LUG NUT REMOVER **IMPACT SOCKET SET**

· APPLICATION: Use for removing wheel locks or damaged lug nuts • Patented, internal tapered reverse threads lock onto damaged nut and easily pulls off using impact wrench • Convenient compact storage case • INCLUDES THE FOLLOWING 1/2" DRIVE SIZES: 3/4", 13/16", 1", 1-1/8" • MADE IN USA





492-30254



ASCOT NO MFG. NO.

492-30254

30254

DESCRIPTION

4-Piece Lug Nut Remover Impact Socket Set INCLUDES: 3/4", 13/16", 1", 1-1/8" (1/2" Drive)

4-PIECE HEAVY DUTY WHEEL STUD REMOVER SET

• APPLICATION: Removes damaged wheel studs and inner Budd nuts • Patented, internal tapered reverse threads lock onto damaged stud or nut and easily pulls off using impact wrench • Wheel Stud Removers are 3/4" hex drive • Budd Nut Removers are 1-1/8" hex drive • Convenient compact storage case, 6.5" x 4.5" x 2.75"; 3.5 lbs • SET INCLUDES THE FOLLOWING SIZES: 5/8", 3/4", 1-1/8" Budd wheel inner nut left hand thread, 1-1/8" Budd wheel inner nut right hand thread • MADE IN USA







492-30649



DESCRIPTION

ASCOT NO. 492-30649

MFG NO

30649

4-Piece Heavy Duty Wheel Stud Remover Set INCLUDES: 5/8", 3/4", 1-1/8" Budd left hand, 1-1/8" Budd right hand





Lug Nut Removal Products (cont.)

1/2" DRIVE 9-PIECE WHEEL LOCK REMOVAL KIT

• APPLICATION: For Ford, Chrysler & GM Vehicles as well as standard and oversized OEM and aftermarket wheel locks for other domestic and imported cars and light trucks

1/2" DRIVE 13-PIECE WHEEL LOCK REMOVAL KIT

• APPLICATION: For Ford, Chrysler & GM Vehicles as well as standard and oversized OEM and aftermarket wheel locks for other domestic and imported cars and light trucks



	KIT CONTENTS					
401-02840	2840	9-Piece Wheel Lock Remover Kit				
401-28401	28401	Individual Wheel Lock Remover for Ford and Chrysler Hubcap Locks				
401-28402	28402	Individual Wheel Lock Remover for Ford Wheel Locks and 18mm GM Lug Nuts				
401-28403	28403	Individual Wheel Lock Remover for Corvette, GM, N & F Body Wheel Locks				
401-28404	28404	Individual Wheel Lock Remover for Oversize McGard Wheel Locks				
401-28405	28405	Individual Wheel Lock Remover for McGard Wheel Locks & GM Hubcap Locks				
401-28406	28406	Individual Wheel Lock Remover Extractor Punch				
401-28407	28407	Individual Wheel Lock Remover for Chrysler Hubcap Locks				
401-28408	28408	Individual Wheel Lock Remover for GM Hubcap Locks				
401-28409	28409	Individual Wheel Lock Remover for GM Spline Hubcap Locks				

ASCOT NO.	MFG. NO.	DESCRIPTION
401-02840	2840	Deluxe Hubcap Wheel Lock Removal System

KIT CONTENTS						
Ford, Chrysler & Large	Oversized McGuard Wheel Lock Adapter					
GM Lock Remover	Punch					
GM Spline Hublock Adapter	Late Model Chrysler Lock Adapter					
Standard GM Hubcap Locks Stripped 18mm/GM Wheel	1/2" Dr. 18mm Nut/Corvette GM Lock Remover 3/4", 19mm, OS Wheel Lock Remove					
					Cover Adapter	
Corvette-GM N& F Body Adapter					7/8" OS Wheel Lock Remover	
Standard Ford & GM/ Large Wheel Adapter	1/2" x 3" Impact Extension					

ASCOT NO.	MFG. NO.	DESCRIPTION
401-02841	12840-13	1/2" Drive 13-Piece Wheel Lock Removal Kit



COMMERCIAL TRUCK CHROME LUG NUT PULLER

• Thick carbon steel material provides strength for heavy duty applications • Round shape handle provides comfort and ease of operation • Suitable for all heavy duty truck lug nut applications • Two hole design can be switched to expand range and size of application • Coated jaws protect painted, aluminum or chrome plated lug nuts from damage





ASCOT NO. MFG. NO.

402-03116 202603-HD DESCRIPTION

Commercial Truck Chrome Lug Nut Puller



CHROME LUG NUT COVER REMOVER

- Coated to prevent scratching or damage to chrome, coated or painted lug covers
- Cushioned grip to prevent slippage







ASCOT NO. 402-30606

MFG. NO. 30606

DESCRIPTION Chrome Lug Nut Cover Remover

HEAVY DUTY PROFESSIONAL CHROME NUT PULLER

- · Coated to prevent scratching or damage to chrome, coated or painted lug covers
- Cushioned grip to prevent slippage NO ADJUSTMENT REQUIRED: Fits all 33mm & 11/2" covers • Similar to Ken Tool 30606



ASCOT NO. 402-03016

MFG. NO. 202603

DESCRIPTION

Heavy Duty Professional Chrome Nut Puller with Cushion Handle



Wheel Attaching Hardware

HUB CENTRIC NUT

By filling the void between the stud hole, "clocking" is eliminated, and problems caused by clocking, such as wheel offs and wheel hub vibrations, are eliminated.

- · Hub Centric Nut fills void standard flange nuts don't
- Stops rim from shifting forwards or backwards
- Eliminates "clocking" caused by standard wheel nuts not filling wheel hole completely
- · Metric 2-piece hub centering nut

MFG. NO.

X10-PN22B


- Elongated neck for centering the wheel to the hub
- · Certified American Steel
- Each part tested for thread, fit and finish
- · QUANTITY: 50 per box




WHEEL ASSEMBLY WITH


ASCOT NO.

491-00133

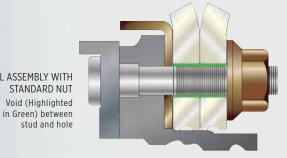



WHEEL ASSEMBLY WITH HUB **CENTRIC NUT** Hub Centric Nut fills void between stud and hole

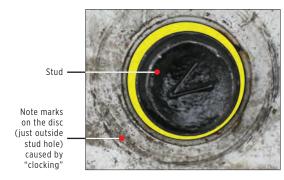

DESCRIPTION

Yellow highlight shows void between stud and stud

> Hub Centric Nut fills void between stud and hole



This nut had been torqued to specifications and retorqued per factory settings.





SKIRT NUTS

• Stops wheel/hub vibrations and many tire wearing problems • Stops wheel movement (clocking) on the face of the hub • Eliminates wasted fuel caused by rolling resistance or "drag" • Special graphite coating prevents nut from rusting onto the hub • QUANTITY: 25 per box










491-02906







491-02919



There is a fairly large tolerance between the diameter of each stud hole and the diameter of the stud itself.



491-02928

ASCOT NO.	MFG. NO.	DESCRIPTION
491-02301	GL-2301	Haltec 33mm 2-Piece Flange Nut: • 130 per Case • Inner Thread M22-1.5 • For Uni-Mount 10-Hole Systems
491-02906	GL-2906	Haltec 6mm Sleeve Nut: Steel Steers
491-02919	GL-2919	Haltec 19mm Sleeve Nut: • Aluminum Steers • Steel/Steel Drives • Steel Outer/Aluminum Inner Drives
491-02928	GL-2928	Haltec 28mm Sleeve Nut: • HD Aluminum • Super Single • Wide Base • Aluminum Outer/Steel Inner Drives
491-02939	GL-2939	Haltec 39mm Sleeve Nut: Dual Aluminum Drive Axle



491-02939

33MM SKIRT NUT

• Original Skirt Nut • Replaces standard M22 flange nuts on 11.25" hub-piloted wheels • Partially penetrates the stud hole and prevents clocking and vibration • QUANTITY: 100 per case







491-01133

ASCOT NO. MFG. NO. DESCRIPTION SN-M22 33mm Skirt Nut 491-01133

WHEEL SERVICE PRODUCTS



Wheel Attaching Hardware (cont.)

GRADE 8 DISC WHEEL HARDWARE-INNER CAP NUTS

ASCOT NO. FOR SIRCO	SIRCO NO.	ASCOT NO. FOR GLP	GLP NO.	OUTER THREAD	INNER THREAD	OVERALL LENGTH	SIMILAR TO:			
491-00708	708AR	491-01001 (RH)	GL-1001	1 1/8" - 16	3/4" - 16	2 7/32"	Budd 10708	Euclid 7895R	Leland W-11	Steel/Steel
491-00709	709AL	491-01002 (LH)	GL-1002	1 1/8" - 16	3/4" - 16	2 7/32"	Budd 10709	Euclid 7895L	Leland W-12	Steel/Steel
491-00896	896R	491-01003 (RH)	GL-1003	1 1/8" - 16	3/4" - 16	2 9/16"	Budd 35336	Euclid 7896R	Leland W-620	Steel/Alum
491-01896	896L	491-01004 (LH)	GL-1004	1 1/8" - 16	3/4" - 16	2 9/16"	Budd 35337	Euclid 7896L	Leland W-621	Steel/Alum
491-00897	897R	491-01005 (RH)	GL-1005	1 1/8" - 16	3/4" - 16	3 1/16"	Budd 22621	Euclid 7897R	Leland W-616	Steel/Alum
491-01897	897L	491-01006 (LH)	GL-1006	1 1/8" - 16	3/4" - 16	3 1/16"	Budd 22622	Euclid 7897L	Leland W-617	Steel/Alum
491-00978	988R	491-01011 (RH)	GL-1011	1 1/8" - 16	3/4" - 16	3 1/16"	Alcoa 5988R	Euclid 5988R	Leland W-486	Alum/Alum
491-01978	988L	491-01012 (LH)	GL-1012	1 1/8" - 16	3/4" - 16	3 1/16"	Alcoa 5988L	Euclid 5988L	Leland W-487	Alum/Alum
	METRIC									
491-00306	306R	491-01009 (RH)	GL-1009	M30 -1.5	M20 -1.5	M-62 (2 7/16")	Hino 900423101	Isuzu 1-42335005 - Zinc		
491-01306	306L	491-01010 (LH)	GL-1010	M30 -1.5	M20 -1.5	M-62 (2 7/16")	Hino 900424101	Isuzu 1-42336005 - Zinc		



491-01001



491-01003



GRADE 8 DISC WHEEL HARDWARE-OUTER CAP NUTS

ASCOT NO. FOR SIRCO	SIRCO NO.	ASCOT NO. FOR HALTEC	HALTEC NO.		SIMILAR TO:	
491-00891	891AR	491-02001 (RH)	GL-2001	Budd 37891	Euclid 5997R	Leland W-13
491-00892	892AL	491-02002 (LH)	GL-2002	Budd 37892	Euclid 5997L	Leland W-14
491-00888	888R	491-02101 (RH)	GL-2101	Budd 37888	Euclid 5652R	Leland W-15
491-00889	889L	491-02102 (LH)	GL-2102	Budd 37889	Euclid 5652L	Leland W-16
491-00995	995R	491-02103 (RH)	GL-2103	Alcoa 5995R	Euclid 5995R	Leland W-506
491-01995	995L	491-02104 (LH)	GL-2104	Alcoa 5995L	Euclid 5995L	Leland W-507
N/A	891BR	491-01891	GL-2004	THRU HARDNESS - GMC-3988631		
N/A	892BL	491-02892	GL-2003			
N/A	N/A	491-02203	GL-2203	Budd 95188	Euclid 9022R	Dodge 3637719
N/A	N/A	491-02204	GL-2204	Budd 95189	Euclid 9022L	Dodge 3637720
N/A	N/A	491-02202	GL-2202	Budd 81269	Euclid 5734	GMC 3771410
N/A	N/A	491-02303	GL-2303	Alca 389928	Ford E4tZ-1012A	N/A
			ME ⁻	TRIC		
491-00304	304R	491-02009	GL-2009	Hino 900421112	Isuzu 1-42333023	Leland W-722/3
491-01304	304L	491-02010	GL-2010	Hino 900422104	Isuzu 1-42334023	Euclid 10254R/L
491-00033	333B	491-02301	GL-2301	Budd 106333	Euclid 6000A	Leland W-498
491-00881	881M	491-02302	GL-2302	MW 88881	Euclid 5991	Leland W-492



491-02001



491-02203









COUNTERACT WHEEL CENTERING SLEEVES

• Patent pending wheel centering system that works in conjunction with your OEM style two-piece flange nuts • Unique self-sizing & non-corrosive design re-aligns the wheel to the TRUE CENTER of the hub bearing • Increased fuel mileage, increased tire life, decreased tire vibration, stops irregular tire wear, decreased tire maintenance, reduced tire cupping, reduced "wheel off" conditions • Made from a high temperature resistant polyamide





COUNTERACT INSTALLATION/REMOVAL TOOL

• Specifically designed to install and remove Counteract Centering Sleeves



ASCOT NO.

491-02111 WCS-IT Counteract Installation/Removal Tool







491-02620

⚠WARNING: For more information go to www.P65Warnings.ca.gov.



ASCOT NO.	MFG. NO.	DESCRIPTION
491-02622	WCS-B	Centering Sleeves Clamshell - 22mm (Pack of 6)
491-02620	WCS-B20	Centering Sleeves Clamshell - 20mm (Pack of 6)
491-02100	WCS-C	Centering Sleeves - 22mm (Bucket of 100)
491-02101	WCS-D	Centering Sleeves - 22mm (Bucket of 1,000)



WHEEL STUD ALIGNMENT SET

• 5 SIZES: M12 x 1.25, M12 x 1.5, M12 x 1.75, M14 x 1.25, M14 x 1.5 • Each stud is marked with the thread size • Color coded for easy identification • Knurled edges provide a secure grip • Comes in a sturdy blow molded case



491-19010

ASCOT NO.	MFG. NO.	DESCRIPTION
491-19010	OT-190F	10-Piece Wheel Stud Alignment Set






Wheel Attaching Hardware (cont.)

MUD FLAP BOLT KIT

• All the hardware needed to attach mud flaps to trucks or trailers • INCLUDES: (4) 3/8"-16 x 1-1/4" bolts, (4) 3/8" Nuts, (8) 3/8" flat washers & (4) 3/8" lock washers

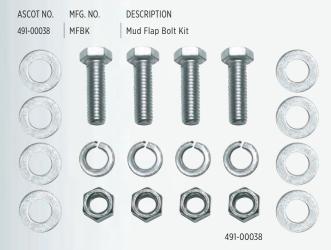

OIL SEAL HUBCAPS AND GASKETS



ASCOT NO.	MFG. NO.	DESCRIPTION
491-04009	GL-4009	Standard 6-Hole Hubcap
491-04012	GL-4012	6-Hole Gasket for Above
491-04013	GL-4013	Universal Gasket - 5 or 6 Hole
491-04020	GL-4020	Replaceable Window Kit
491-04021	GL-4021	Rubber Plug for Bolt-On Cap
491-09013	GL-4913	Fruehauf/Propar Cap
491-09014	GL-4974	O-Ring for Screw-On Cap

CONE WHEEL NUTS



ASCOT NO.	MFG. NO.	SIZE	DESCRIPTION
491-00014	GL-0014	7/16"-20 (3/4" Hex, 9/16" High)	G.M.
491-00016	GL-0016	1/2"-20 (13/16" Hex, 5/8" High)	Ford
491-00027	GL-0027	1/2"-20 (3/4" Hex, 9/16" High)	Chrysler
491-00062	GL-0062	12mm-1.5 (19mm Hex, 14mm High)	G.M.
491-00066	GL-0066	12mm-1.5 (21mm Hex, 16mm High)	Toyota
491-00065	GL-0065	12mm-1.25 (21m Hex, 16mm High)	Nissan
491-00064	GL-0064	12mm-1.25 (19mm Hex, 16mm High)	Nissan
491-00052	GL-0052	9/16"-18 (7/8" Hex, 3/4" High)	G.M.
491-00055	GL-0055	R.H. 5/8"-18 (1" Hex, 21/32" High)	Budd 67147
491-00056	GL-0056	L.H. 5/8"-18 (1" Hex, 21/32" High)	Budd 67147

SPOKE WHEEL HARDWARE





491-03005

491-03002

ASCOT NO. FOR SIRCO	SIRCO NO.	ASCOT NO. FOR HALTEC	HALTEC NO.	THREAD	9	SIMILAR TO):		
		F	RIM CLAMI	P NUTS					
491-00149	149	491-03004	GL-3004	5/8-11	Dayton 5149	Euclid 4962	Leland W-7		
491-00716	716	491-03005	GL-3005	3/4-10	Dayton 5716	Euclid 4963	Leland W-8		
	RIM STUDS (GRADE 8)								
491-00654	654	491-03001	GL-3001	5/8-11x2- 3/4	Dayton 6654	Euclid 4958	Leland W-5		
N/A	N/A	491-03002	GL-3002	3/4-10x3	Dayton 5715	Euclid 4956-A	Leland W-6		

LOCKING BACK NUTS



ASCOT NO.	HALTEC NO.	SIZE	SIMIL	AR TO:
491-06023	GL-6023	5/8"-18	MW 85643	_
491-02431	GL-2431	7/8"-14	Budd 41073-8	Euclid 1835
491-02445	GL-2445	1"-14	Budd 44672-9	Euclid 1828

BRAKE DRUM MOUNTING HARDWARE




491-06014

ASCOT NO.	MFG. NO.	SIZE	DESCRIPTION
491-06012	GL-6012	5/8-18 x 2"	5/8" Brake Bolt/Washer/Assembly
491-06014	GL-6014	3/4-16 x 2"	3/4" Brake Bolt/Washer/Assembly
491-06020	GL-6020	5/8-18 x 2"	Brake Bolt Only
491-06021	GL-6021	3/4-16 x 2"	Brake Bolt Only
491-06025	GL-6025	5/8"	Flat Washer
491-06026	GL-6026	3/4"	Flat Washer
491-06023	GL-6023	5/8"-18"	Lock Nut Only
491-06024	GL-6024	3/4"-16"	Lock Nut Only



WHEEL SERVICE PRODUCTS

RIM CLAMPS









491-03097

491-03113

491-06115

ASCOT NO. FOR SIRCO	SIRCO NO.	ASCOT NO. FOR HALTEC	HALTEC NO.	A DIM.	B. DIM.	C. DIM.	5	SIMILAR TO):
491-00399	399	491-03083	GL-3083	N/A	N/A	N/A	Dayton 8399	Euclid 5927	Leland W-124
491-00729	729	491-03087	GL-3087	N/A	N/A	N/A	Dayton 09- 729514	Euclid 5838	Leland W-407
491-00123	123	491-03096	GL-3096	1-1/8"	2-7/8"	2-11/32", 3/4" Stud	Dayton 6123	Euclid 5571A	Leland W-3
491-00235	235	491-03097	GL-3097	1-3/4"	2-7/8"	2-11/32", 3/4" Stud	Dayton 6235	Euclid 5572A	Leland W-4
491-00993	993	491-03098	GL-3098	1-1/2"	2-7/8"	2-11/32", 3/4" Stud	Dayton 6993	Euclid 5040A	Leland w-120
N/A	N/A	491-03099	GL-3099	2-1/8"	2-7/8"	2-11/32", 3/4" Stud	Dayton 705317	Euclid 5786	Leland W-403
N/A	N/A	491-03101	GL-3101	1-7/8"	2-7/8	2-11/32", 3/4" Stud	Dayton 851817	Webb 16124	Leland W-404
N/A	N/A	491-03103	GL-3103	1-1/4"	2-7/8"	2-11/32", 3/4" Stud	Dayton 8708	Euclid 5784	Leland W-405

ASCOT NO. FOR SIRCO	SIRCO NO.	ASCOT NO. FOR HALTEC	HALTEC NO.		SIMILAR TO:	
491-00257	257	491-03113	GL-3113	Mack 15QJ-17P1	Euclid 5828	Leland W-450
491-00238	238	491-03271	GL-3271	Mack 15QJ-223BP8	Euclid 5781	Leland W-448
491-00233	233	491-03279	GL-3279	Mack 15QJ-223BP3	Euclid 5821	Leland W-467
N/A	N/A	491-06115	GL-6115	Kelsey 79954	N/A	N/A



STANDARD WHEEL RIM **GUARD**

• APPLICATION: Protects aluminum, chrome and painted truck rims/wheels during stud and nut

402-50301

removal • Inexpensive • Tough polymer design

ASCOT NO. MFG. NO. DESCRIPTION Standard Wheel Rim Guard 50301



The standard wheel rim guard in use.

ALUMINUM WHEEL **SHIELD**

• APPLICATION:

Covers entire wheel while changing tires

• Protects aluminum wheel surface from ground • Torque sequence imprint

ASCOT NO. MFG. NO. DESCRIPTION Aluminum Wheel Shield 402-50200 50200



⚠WARNING: For more information go to www.P65Warnings.ca.gov.

The aluminum wheel shield in use.

402-50200

INSTALLATION TOOL FOR ALCOA HUB COVER SYSTEMS

• APPLICATION: For use with Alcoa 076185, 077185, 076188 & 077188 Hub Systems



ASCOT NO.	MFG. NO.	DESCRIPTION
491-00600	600	Installation Too for Alcoa Hub Cover Systems

DISCMATE WHEEL PROTECTORS

• Used to protect the wheel's mounting surface from cosmetic damage during use • Placed between the wheel and it's mounting surface on the vehicle and may also be used between 2 dualed wheels for added protection • Wheel nuts should always be tightened to the correct torque following the wheel manufacturer's specifications



ASCOT NO.	MFG. NO.	DESCRIPTION
402-11000	61020	10-Hole 285.75mm, Hub Pilot, 22mm Studs
402-17000	61000	10-Hole 11-1/4" Stud- Pilot, 1-1/8" Studs
402-18000	61040	10-Hole 335mm, 32mm Cap Nuts, 22mm Studs



Tire & Wheel Service Tools

WHEELOK SYSTEMS FOR HEAVY DUTY VEHICLES



ASCOT NO.	MFG. NO.	DESCRIPTION
401-10431	X10-DN43Z	Wheelok Nut & Free Spinning Sleeve - 2 Recommended For Each Wheel to Replace 2 Regular Nuts
401-10430	X10-DK43Z	Wheelok Key With Replaceable Pin - "Combination" Determined By Position Of Pins

WHEELOK SYSTEMS FOR HEAVY DUTY VEHICLES

• APPLICATION: For trucks, tractors or trailers with Budd Unimount™ Wheels - 22mm thread or equivalent



ASCOT NO.	MFG. NO.	DESCRIPTION
401-10220	X10-UN22Z	Wheelok Nut, Flange and Free Spinning Sleeve - Combined Into One Single Unit
401-10221	X10-UK22Z	Wheelok Key with Replaceable Pin - "Combination" Determined By Position Of Pins

WHEELOK SYSTEMS FOR HEAVY DUTY VEHICLES: FRONT WHEELS

• APPLICATION: For trucks, tractors or trailers with disc (Budd) Wheels; For truck or tractor front wheels

ASCOT NO.	MFG. NO.	DESCRIPTION
401-10160	X10-BN16Z	Wheelok Nut & Free Spinning Sleeve - Right-Hand Thread - 2 For Each Wheel To Replace 2 Regular Nuts
401-10170	X10-BN17Z	Wheelok Nut & Free Spinning Sleeve - Left-Hand Thread - 2 for Each Wheel to Replace 2 Regular Nuts

WHEELOK SYSTEMS FOR HEAVY DUTY VEHICLES: REAR WHEELS

• APPLICATION: For trucks, tractors or trailers with disc (Budd) Wheels; For truck or tractor rear wheels

ASCOT NO.	MFG. NO.	DESCRIPTION
401-10280	X10-BN28Z	Wheelok Nut Only - Right Hand Thread - 2 For Each Wheel To Replace 2 Regular Nuts
401-10290	X10-BN29Z	Wheelok Nut Only - Left Hand Thread - 2 For Each Wheel To Replace 2 Regular Nuts
401-10810	X10-BK81Z	Wheelok Key With Replaceable Pin - "Combination" Determined By Position Of Pins

WHEELOK SYSTEMS FOR AUTOS & LIGHT TRUCKS

- EACH KIT INCLUDES: 4 nuts (1 for each wheel) and 1 key
- Available for American vehicles and imports
- Combination determined by order of pins

Wheel Lug







401-10000

ASCOT NO. MFG. NO. DESCRIPTION
401-10000 X10-SS00C Wheelok System for autos & light trucks



RIB NUT SALVAGE TOOL KIT

• INCLUDES: (1) Drift Pin, (1) Salvage Cylinder, (1) LH Thread Bolt, (1) RH Thread Bolt

MFG. NO. ASCOT NO.

DESCRIPTION

499-10150 X10-LS15B Rib Nut Salvage Tool Kit



499-10150

13/16" SQUARE HEAD ADAPTER

MFG. NO.

X10-SA13B

ASCOT NO.

499-10130



499-10130

Fits 1-1/2" Socket Wrench to Speed Up Installing Or Removing Budd Wheel Inner Cap Nuts

3-PIECE HEX NUT REMOVER KITS



ASCOT NO.	MFG. NO.	DESCRIPTION
492-15000	X10-NR15B	1-1/2" Hex Nut Remover Kit - 3 Piece
492-14000	X10-NR14R	1-1/4" Hex Nut Remover Kit - 3 Piece

STUD INSTALLERS





ASCOT NO.	MFG. NO.	DESCRIPTION
492-10134	X10-SI34Z	For 3/4" Studs. Fits 1-1/4" Socket
492-10150	X10-LC15B	Rib Nut Salvage Cylinder
492-10158	X10-SI58Z	For 5/8" Studs. Fits 1-1/4" Socket
492-10159	X10-SI59Z	For 5/8" x 18 Studs. Fits 1-1/4" Socket
492-10196	X10-SI96Z	For 9/16" x 18 studs. Fits 1-1/4" Socket
492-10590	X10-SI59Z	5/8"- 18 Stud Installer

STUD REMOVERS

ASCOT NO.	MFG. NO.	DESCRIPTION
492-10340	X10-SR34B	For 3/4" Studs. Fits 1-1/4" Socket
492-10580	X10-SR58B	For 5/8" Studs. Fits 1-1/4" Socket
492-10180	X10-SR18B	For 1-1/8" Studs. Fits 1-1/4" Socket
492-10780	X10-SR78B	For 7/8" Studs. Fits 1-1/4" Socket

499-10171 X10-SA17B 17mm Stud Adapter 499-10210 X10-SA21B 21mm Stud Adapter

HEAVY DUTY DRIVE-ON RIB-GRIP LUG-OFF KITS

DESCRIPTION



ASCOT NO.	MFG. NO.	DESCRIPTION
499-10200	X10-LT20B	For Removing Damaged Inner Cap Nuts (1-1/8" Dia 13/16" Square Head) INCLUDES: (1) Drive-On Tool And (1) Rib Nut
499-10340	X10-LT34B	For Removing Damaged 3/4" Lug Studs. INCLUDES: (1) Drive-On Tool And (1) Rib Nut
499-10580	X10-LT58B	For Removing Damaged 5/8" Lug Studs. INCLUDES: (1) Drive-On Tool, (1) Rib Nut
499-10660	X10-LT66B	Triple Duty Tool For Removing Damaged Budd Wheel Inner Cap Nuts, 3/4" And 5/8" Lug Studs. INCLUDES: (1) Drive-On Tool and (3) Rib Nuts

REPLACEMENT RIB NUTS

ASCOT NO.	MFG. NO.	DESCRIPTION
499-10180	X10-LN18B	For Budd Wheel Inner Cap Nuts
499-10341	X10-LN34B	For 3/4" Lug Studs
499-10581	X10-LN58B	For 5/8" Lug Studs
499-10211	X10-LN21B	For 21mm Lug Studs
499-11171	X10-LN17B	For 17mm Lug Studs
492-10151	X10-LP15Z	Drive Pin



Tire & Wheel Service Tools (cont.)



WHEEL STUD INSTALLERS

Prevents damage to your lug nuts or new stud by reducing friction during stud installation

Works with hubs, rotors, axles

Two sizes available: Vehicle Wheel Stud Installer & Truck Wheel Stud Installer



492-02278



492-14916

ASCOT NO.	MFG. NO.	DESCRIPTION
492-02278	TWS-22	Truck Wheel Stud Installer - Fits studs up to 7/8" (22mm)
492-14916	TWS-14	Vehicle Wheel Stud Installer - Fits studs up to 9/16" (14mm)





7-PIECE SPARE TIRE TOOL SET

 Allows anyone to quickly remove difficult to reach spare tires • No more digging through the customer's vehicle to locate the spare tire removal kit • Color-coded wall bracket allows user to quickly identify the correct removal tool · APPLICATION: Includes many trucks & SUV's where the spare

tire is located under the vehicle



ASCOT NO.	MFG. NO.	DESCRIPTION
319-96090	96090A	7-Piece Spar Tire Tool Kit

ASCOT NO. MFG. NO. DESCRIPTION

ASCOT NO.	PII U. NO.	DESCRIPTION
INDIVIDUAL SPARE TILE TOOLS		
319-96091	96091	Spare Tire Tool - Flat Head: Red APPLICATION: For Use on Late Model S10 trucks, Explorers, Blazers, Jimmys, F150s, Expeditions, Older Dakota 2-Wheel Drives and McGuard Lock Systems
319-96092	96092	Spare Tire Tool - Pin Head: Blue APPLICATION: For Use on Import Trucks
319-96093	96093	Spare Tire Tool - Hex Head: Yellow APPLICATION: For Use on Dodge Full Size and Stake Bodies, '98-'01 Dodge Full-Size 4-Wheel Drive
319-96094	96094	Spare Tire Tool - 12mm Square Head: Green APPLICATION: For Use on All Late Model GMs, Remaining '98-'03 Dodge Trucks
319-96095	96095	Spare Tire Tool - Std. Square Head: Orange APPLICATION: For Use on Older Ford Trucks
319-96096	96096	Spare Tire Tool - Slotted Square Head: Black APPLICATION: For Use on Dodge Durango, Inside the Hatch
319-96097	96097	Wall Mount Bracket for Spare Tire Tool Set Color-coded to allow user to quickly identify the correct removal tool
319-96098	96098	Spare Tire Tool - 3/8" Square Head: Purple APPLICATION: For Use on New Ford Models



UNI-MOUNT M22 THREAD PITCH GAUGE

• APPLICATION: Designed for M22 x 1.5 Uni-Mount Studs • If the

401-69260



thread teeth do not fully engage the stud, the stud should be removed from service • Simple to use

MFG. NO. DESCRIPTION ASCOT NO.

69260

SIMPLE TO USE Uni-Mount Thread Gauge



OF A 10-TON

SHOP **PRESS**

PORTABLE TRUCK WHEEL STUD **REMOVER & INSTALLER**

• Power of a 10-ton shop press • Remove and install studs without removing the hub • Two-hour job is done in twenty minutes without risk of damaging seals or bearings • Any mechanic can use it to get the job done right in minutes

CHAMFER/NUT GAUGE

· Kit shows when wheel chamfers and wheel nuts are worn out • Visual guide detects excessive wear in bolt holes • APPLICATION: For use with steel stud piloted wheels



401-69290

⚠WARNING: For more information go to www.P65Warnings.ca.gov.

ASCOT NO. MFG. NO. DESCRIPTION 401-69290 69290 Chamfer Nut Gauge

492-06346

ALCOA WHEEL INSTALLATION SLEEVES

• Align wheel bolt holes • Seat brake drums that have .980" diameter bolt holes • Prevent damage to M22x1.5 studs • Assist in lining up all components for ease of install • INCLUDES: 2 tools per kit • Made in USA



491-00426

ASCOT NO. MFG. NO. DESCRIPTION Alcoa Wheel 491-00426 407422 Installation Sleeves

ASCOT NO.	MFG. NO.	DESCRIPTION	
492-06247	6247	PakPress Cart	
492-06346	6346	Complete PakPress Kit (Includes Cart)	





Stud and Hub Cleaning Tools

STUD CLEANING TOOLS

- Allows for cleaning the full length of the thread on 10 studs in less than 3 minutes
- · Works with air or hand tools
- · CAUTION: Always use eye protection
- 1/2" adapter included with each tool
- · Replacement Brushes Available





ASCOT NO.	MFG. NO.	DESCRIPTION
ASCULIVO.	PIEG. NO.	DESCRIPTION

REPLACEMENT BRUSHES FOR STUD CLEANING TOOLS			
402-00112	SBR12	12mm (7/16") Repl. Brush	
402-00113	SBR13	13mm (1/2") Repl. Brush	
402-00014	SBR14	14mm (9/16") Repl. Brush	
402-00016	SBR16	16mm (5/8") Repl. Brush	
402-00118	SBR18	18mm (45/64") Repl. Brush	
402-00120	SBR20	20mm (25/32") Repl. Brush	
402-00122	SBR22	22mm (7/8") Repl. Brush	
402-00128	SBR28	28mm (1-1/8") Repl. Brush	



Replacement Brush for Stud Cleaning

ASCOT NO.	MFG. NO.	DESCRIPTION
402-00013	SBCT-13	13mm (1/2") Stud Cleaning Tool
402-00022	SBCT-22	22mm (7/8") Stud Cleaning Tool
402-00028	SBCT28	28mm (1-1/8") Stud Cleaning Tool







Stud Cleaning Tool in use.





PROFESSIONAL STUD/HUB BRUSH KIT

- Ideal for hub and stud cleaning job with ease QUICK AND EASY: Change brushes in seconds • Includes a 1/2" drive adapter
- Powered by a cordless drill Replacement brushes available





ASCOT NO. MFG. NO. DESCRIPT	
	ΩN

REPL	ACEMENT COM	PONENTS FOR STUD/HUB BRUSH KIT
402-32611	203611-ASC	Plastic Hub/Stud Tool & Adapter
402-32613	203613-ASC	4-Pack of Replacement 14mm Stud Brushes
402-32614	203614-ASC	4-Pack of Replacement 22mm Stud Brushes
402-32615	203615-ASC	4-Pack of Replacement Passenger Hub Brushes
402-32616	203616-ASC	4-Pack of Replacement Truck Hub Brushes

ASCOT NO.	MFG. NO.	DESCRIPTION
402-32610	203610-ASC	Stud/Hub Brush Kit

HUB BUDDY TOOL

• IMPACT RATED: No need to change tools • Complies with best practice R.I.S.T. procedure • Removes rust, corrosion and other build-up from wheel stud, drums and tire rim • Helps proper torque of lug nuts by removing corrosion • A must for easy and accurate tire balancing • INCLUDES: 1 Hub Buddy XL attachment and 1 cleaning disc head • Replacement cleaning discs available in packs of 6 (Product # 402-37335)



ASCOT NO.	MFG. NO.	DESCRIPTION
402-37330	37330	Hub Buddy Tool
402-37335	37335	2" Hub Buddy Tool Replacement Pads
402-37340	37340	1-1/2" Hub Buddy Tool Replacement Pads

STUD CLEANING KIT

• Quickly and effectively clean rust and corrosion from wheel studs • Manufactured from one single piece of anodized aluminum for increased durability · Designed for use with Auto, Light Truck, SUV, Utility Trailers, Commercial Truck and Bus applications · Contains everything you need to clean a wide variety of wheels in one handy kit



KIT CONTENTS			
SBCT22 with a SBR22 brush	2 hex keys		
Safety glasses	REPLACEMENT BRUSHES: SBR		
2 adapters	12,13,14,16, 18, 20 and 22mm		

DESCRIPTION ASCOT NO. MFG. NO. 402-01322 SKT-1322 Stud Cleaning Kit





WHEEL HUB GRINDER

• Special grinder for cleaning the wheel centering device as well as the attachment area between the wheel and hub • Burned in corrosion residues are completely removed in a quick and easy process • Actual cleaning time per hub only takes between 3-25 seconds depending upon residue thickness • Replacement Discs Available

QUICKLY

REMOVES

RUST





402-43352





Wheel Hub Grinder in action.

ASCOT NO.	MFG. NO.	DESCRIPTION
402-43352	433 502/M	Wheel Hub Grinder
402-43351	433 501	Grinder Replacement Discs (3 per package)

INNER RIM CLEANER AND REPLACEMENT DISCS

- Meant for the optimal cleaning of the inner wheel contact surface
- Prevents corrosion related distortion of wheel bolt tightening torque • Allows for the complete removal of burnt in corrosion
- Used only on the inside of an aluminum rim • Velcro adhesive makes it easy to change out replacement discs • 75mm diameter in size • REPLACEMENT DISCS AVAILABLE: 3 per box





		D. C.
ASCOT NO.	MFG. NO.	DESCRIPTION
402-43357	433 507	Inner Rim Cleaner
102-13358	/33 508	Panlacement Discs (7 per Roy)

3M BRAKE HUB **CLEANING DISCS**

• Extremely tough three-dimensional web • Non-metallic attachment system and disc pad holder • Roloc disc locks securely; 1/2 turn on, 1/2 turn off

• Ideal for use on right angle air tools

• KIT CONTAINS: 5 Scotch-Brite Roloc Brake Hub Cleaning Discs and 13M Brake Hub Cleaning Disc Holder



ASCOT NO.	MFG. NO.	DESCRIPTION
402-07545	07545	3M Brake Hub Cleaning Disc Holder
402-07546	07546	3M Scotch-Brite Roloc Brake Hub Cleaning Discs - 10 Discs
402-07547	07547	3M Scotch-Brite Roloc Brake Hub Cleaning Disc Kit



Bottle Jacks

Service Jacks

Jack Stands

Specialty Jacks

Transmission Jacks

Wheel Dollies

Vehicle Stands & Accessories

Shop Cranes





301-76312



Portable Bottle Jacks

2, 3, 5 AND 8-TON CAPACITY BOTTLE JACKS

- · For heavy duty truck, agriculture, construction, mining, mobile home, oil field, automotive, and marine applications where lifting, pushing, spreading, bending, pressing, or straightening are required
- Two piece zinc plated handle Prevent rust with "Parkerized" pump piston, ram and extension screw • No leak "Uniweld" construction • 50% safety overload factor • State of the art design reduces repair time • Longer wear life due to internally machined oil passages, smooth bearing surfaces and close tolerances
- Lightweight forged base provides more steel only where strength is required • The heavy-duty extension screw and release valve were designed to eliminate parts and reduce the chances of breakage and excessive wear • Safety bypass and overload systems prevent cylinder damage and prevent the jack from being used beyond the ASME/PASE load-limiting standard • Made in Japan



ASCOT NO.	MFG. NO.	CAPACITY (TONS)	MIN. HEIGHT	MAX. HEIGHT	LIFTING HANDLE
301-76502	76502B	2	7-1/8"	14-1/2"	No
301-76503	76503B	3	7-1/2"	15 19/16"	No
301-76505	76505B	5	9-1/16"	18-7/8"	No
301-76508	76508B	8	9-1/16"	18-3/4"	Yes

▲WARNING: For more information go to www.P65Warnings.ca.gov.

12 AND 20-TON CAPACITY AIR/ HYDRAULIC BOTTLE JACKS

• Fast efficient air pump reduces lifting time and has a built-in relief mechanism which prevents the jack from being used beyond its maximum capacity

• Convenient push button air valve connected to an in-line filter prevents contaminates from entering the air/hydraulic system

• Unique design allows for manual operation when air is not available • Two piece zinc plated handle • Parkerized coating on pump piston, extension screw and extension adapters and chrome coated ram offer protection against rust • Longer wear

life due to internally machined oil passages, smooth bearing surfaces and close tolerances • Safety oil by-pass system prevents the ram from being overextended and causing damage to the cylinder • Made in Taiwan

ASCOT NO.	MFG. NO.	CAPACITY (TONS)	MIN. HEIGHT	MAX. HEIGHT	HANDLE LENGTH
301-76312	76312B	12	9-15/16"	19-3/4"	23.5"
301-76320	76320B	20	10-7/8"	20-1/2"	23.5"
301-76720	76720B	20	8-1/4"	14-1/2"	23.5"
301-76721	76721A	20	7-3/4"	11-3/4"	23.5"



ASCOT NO.	MFG. NO.	CAPACITY (TONS)	MIN. HEIGHT	MAX. HEIGHT	LIFTING HANDLE
301-76412	76412B	12-1/2	9-7/16"	18-7/8"	Yes
301-76512	76512B	12-1/2	6-11/16"	13-3/16"	Yes
301-76520	76520B	22	10-13/16"	20-3/16"	Yes
301-76820	76820B	22	8-1/4"	14-15/16"	Yes

Portable Bottle Jacks (cont.)



35 AND 60-TON CAPACITY BOTTLE JACKS

• For heavy duty truck, agriculture, construction, mining, mobile home, oil field, automotive, and marine applications where lifting, pushing, spreading, bending, pressing, or straightening are required • Two piece zinc plated handle • Prevent rust with "Parkerized" pump piston, ram and extension screw • No leak "Uniweld" construction • 50% safety overload factor • State of the art design reduces repair time • Longer wear life due to internally machined oil passages, smooth bearing surfaces and close tolerances • Lightweight forged base provides more steel only where strength is required • The heavy-duty release valve was designed to eliminate parts and reduce the chances of breakage and excessive wear • Safety bypass and overload systems prevent cylinder damage and prevent the jack from being used beyond the ASME/PASE load-limiting standard • Made in Japan



301-76560

ASCOT NO.	MFG. NO.	CAPACITY	MIN. HEIGHT	MAX. HEIGHT	LIFTING HANDLE
301-76535	76535	35-Ton	11"	17-5/16"	Yes
301-76560	76560	60-Ton	12"	18-11/16"	Yes



12 AND 22-TON CAPACITY LOW FORGED STEEL BASE BOTTLE JACKS

• Welded steel construction throughout - reduces metal fatigue allowing for longer use life • Unique base forging method increases resistance to high pressure and gives a degree of durability • Special type of steel resists rust • Needle valve allows for controlled lowering of the ram • Casing, cylinder and base are joined by electric welding for greater strength and are leak proof • Heat treated extension screw provides low pickup height adjustment, maximum lift height and extra strength



ASCOT NO.	MFG. NO.	CAP.	MIN. HEIGHT	MAX. HEIGHT	RAM LIFT	SCREW EXT.	BASE SIZE	SHIP WT.
301-01220	ZN-12	12-Ton	9-1/2"	18-1/2"	5-7/8"	3-1/8"	4-1/8" x 6-1/2"	18 lb.
301-02200	ZN-22	22-Ton	10-5/8"	20-1/8"	6-1/4"	3-1/4"	5" x 7-1/8"	30 lb.
301-01201	ZNB-12	12-Ton	6-3/4"	13-3/8"	3-3/4"	3"	4-1/8" x 6-1/2"	15 lb.
301-02201	ZNB-22	22-Ton	7-1/8"	12"	3-3/8"	1-1/2"	5 x 7-1/8"	27 lb.



WELDED **CYLINDER &**

RPG,

12 & 20-TON IN-LINE WELDED BOTTLE JACKS

• Welded cylinder and reservoir for added strength and durability



ASCOT NO.	MFG. NO.	CAPACITY	MIN. HT.	MAX HT.	HANDLE LENGTH	OVERALL LENGTH	OVERALL WIDTH	SADDLE DIAMETER	SHIPPING WT.
301-61120	61120	12 Tons	9-3/8"	18-5/8"	18-7/8"	6-1/2"	4-3/8"	1-1/2"	18.9 lb.
301-61124	61124	12 Tons	6-3/4"	13-3/8"	18-7/8"	6-1/2"	4-3/8"	1-1/2"	15.4 lb.
301-61200	61200	20 Tons	10-1/2"	20-1/2"	18-7/8"	7-1/2"	5-1/8"	1-3/4"	28.1 lb.

20-TON AIR/HYDRAULIC SHORTY BOTTLE JACK

- · Welded cylinder and reservoir for added strength and durability
- Chrome-plated rams to resist rust and wear
- Built-in bypass device to protect hydraulic system from over-pumping damage
- Self-returning spring for ease of operation
- · Built-in muffler to promote quiet operation
- · Built-in in-line air filter for extended motor life
- High speed turbo motor for efficient, effortless operation
- ¼" quick connect feature allows for ease of mobility and remote operation







▲WARNING: For more information go to www.P65Warnings.ca.gov.





Portable Bottle Jacks (cont.)

HYDRAULIC AIR-ACTUATED BOTTLE JACKS

- Effortless air operation will greatly reduce operator fatigue and speed up the efficiency of garage work All air bottle jacks come with chrome plated rams A compact, yet powerful Air Turbo The motor is equipped to raise the load to the desired height efficiently, effortlessly and safely
- Versatile "Quick Connector" design provides for easy removal of air hose from air motor allowing compact storage or remote operation

PLATED

HYDRAULIC SIDE PUMP BOTTLE JACKS

- Hydraulic system is protected from internal damage by a patented bypass mechanism
- Machined and polished cylinders with die-cut threads provide non-abrasive leak-free, durable performance
 Fabricated from hard-cast steel with heat-treated critical stress areas
- Unique cross-type forged release valve assures positive control A wide, rugged base provides stability and strength



	ASCOT NO.	MFG. NO.	CAP.	MIN. HEIGHT	MAX. HEIGHT	HYD. HEIGHT	EXT. SCREW	BASE SIZE	WT. (LB.)
	301-10125	10125W	12	9-1/2"	18-5/8"	6"	3-1/8"	6" x 5-3/8"	18
	301-10129	10129W	12	6-1/2"	11"	3"	1-1/2"	5-1/4" x 5-1/8"	14
	301-10205	10205W	20	9-3/4"	18-1/2"	5-1/2"	3"	6-1/8" x 5-7/8"	28
	301-10209	10209W	20	6-5/8"	11-5/8"	3	1-3/4"	6" x 6-1/2"	21
	301-10300	10300	30-Ton	11"	18"	7"	n/a	8-1/8" x 6-7/8"	56
i i i i i i i i i i i i i i i i i i i	301-10500	10500	50-Ton	9-1/2"	13-7/8"	4-3/8"	n/a	10-3/4" x 7-5/8"	103-1/2
AAAA,									

301-10120



ASCOT NO.	MFG. NO.	CAP.	MIN. HEIGHT	MAX. HEIGHT	HYD. HEIGHT	EXT. SCREW	BASE SIZE	WT. (LB.)
301-18126	18126C	12-Ton	9-5/8"	18-7/8"	5-1/2"	6"	8" x 5-1/4"	27
301-18204	18204C	20-Ton	10"	18-3/4"	4-7/8"	3-7/8"	8-1/2" x 7-1/8"	34
301-18206	18206C	12-Ton	9-5/8"	19"	5"	6"	9" x 7"	37
301-18209	18209C	20-Ton	8"	15-1/2"	4-1/8"	3-1/4"	8-1/2 x 7-1/4"	37
301-18302	18302C	30-Ton	11"	18"	7"	N/A	10-1/4" x 8-1/4"	63
301-18502	18502	50-Ton	12"	19"	7"	n/a	10-7/8" X 7-3/8"	134-1/2
301-18992	18992	100-Ton	11-7/8"	17-7/8"	6"	n/a	12-3/4" X 9-3/8"	220-1/2

HYDRAULIC IN-LINE BOTTLE JACKS

 Heat-treated extension screw allows low pick-up height adjustment and maximum lift height

• A wide, rugged base provides stability and strength • Easiest accessible pumping system eliminates off-center pumping force for the most efficient operation • U.S. Patented built-in by-pass device protects hydraulic system from over pumping damage • Unique cross-type forged release valve assures positive control



ASCOT NO.	MFG. NO.	CAP.	MIN. HEIGHT	MAX. HEIGHT	HYD. HEIGHT	EXT. SCREW	BASE SIZE	WT. (LB.)
301-10120	10120	12-Ton	9-1/2"	18-5/8"	6"	3-1/8"	7" x 4-1/4"	19-1/2
301-10200	10200	20-Ton	9-1/2"	18-5/8"	6"	3-1/4"	7-3/4" x 5-1/4"	27
301-10208	10208	20-Ton	6-1/2"	11-1/4"	3-1/4"	1-1/2"	7-3/4" x 5"	21

WINNTED

2 TO 30-TON CAPACITY BOTTLE JACKS

• All models have a chrome main ram and a chrome pump piston • The extension screws have a pressed thread • These units can be used horizontally and vertically



ASCOT NO.	MFG. NO.	CAPACITY	MIN. HEIGHT	MAX. HEIGHT	EXT. SCREW
301-41020	G410200	2-Ton	6-1/4"	11-3/4"	2"
301-41040	G410400	4-Ton	7-1/2"	14-1/2"	2"
301-41060	G410600	6-Ton	7-3/4"	14-3/4"	2"
301-41080	G410800	8-Ton	9"	18"	3-1/4"
301-41150	G411500	15-Ton	9-3/4"	19-1/4"	3-1/4"
301-41200	G412000	20-Ton	9-1/2"	18-1/2"	3-1/4"
301-41201	G412001	20-Ton Short	6-1/2"	11-1/4"	1-1/2"
301-41300	G413000	30-Ton	9-1/2"	18-1/2"	3"

▲WARNING: For more information go to www.P65Warnings.ca.gov.

LOW PROFILE AIR BOTTLE JACK

• Low Profile Jack with a 20-Ton capacity • This unit includes a welded base to prolong service

• Comes equipped with a chrome main ram and aluminum air motor to guarantee optimum lifetime • Air filter and air regulator connected to a hose included



WELDED BASE

CHROME MAIN RAM

EXT. ASCOT NO. MFG. NO. CAPACITY MIN. HEIGHT MAX. HEIGHT SCREW 301-43202 G432021 20-Ton 5-3/4" 10-5/16" 1-3/4"

20-TON AIR/HYDRAULIC **BOTTLE JACK**

• This 20-Ton Capacity jack is one of the toughest in the market • Each unit comes equipped with an air regulator, a chrome ram and welded base so that it will keep on working no matter the job · Each unit is hand-tested

before shipping to guarantee maximum reliability





CHROME MAIN RAM

ASCOT NO.	MFG. NO.	CAPACITY	MIN. HEIGHT	MAX. HEIGHT	EXT. SCREW
301-43220	G432020	20-Ton	9-3/4"	18-1/2"	3-1/4"

Portable Bottle Jacks (cont.)



• 90-180 PSI • Factory pre-tested to 150% of rated capacity • Safety bypass system • Dual ram return springs • Saddles are machinehardened steel • Expertly crafted in accordance with the strictest industry standards • Made to ensure the highest level of quality and value



			BASE SIZE				EXTERNAL SCREW	. , ,
302-55200	5520B	20-Ton	9-1/2" x 6-1/2"	10-1/2"	20"	6-1/4"	3-7/8"	39 lb.

12, 20 AND 30-TON CAPACITY SUPER DUTY AIR/HYDRAULIC BOTTLE JACKS

• Welded tank and frame for superior strength • Thick base design provides the most stable lifting

JACK PLATES

- SIZES AVAILABLE: 12" x 12" x 1" and 18" x 18" x 1"
- 100-ton capacity for both sizes
- · Provides stability to bottle jacks, hydraulic rams, jack stands and cribbing
- Non-skid surface
- · Constructed of engineered thermoplastic material
- MADE IN THE USA







ASCOT NO.	MFG. NO.	DESCRIPTION
309-12121	D1212	12" x 12" x 1" Jack Plate
309-18181	D1818	18" x 18" x 1" Jack Plate

ASCOT NO.	MFG. NO.	CAPACITY	MIN. HEIGHT	MAX. HEIGHT	LIFT	BASE SIZE	AIR PRESSURE	AIR INLET FITTING	WT. (LBS)
301-05612	5612SD	12-Ton	9-23/25"	18-49/50"	5-91/100"	8-27/100" x 5-31/100"	110-120 PSI	1/4" NPT	35
301-05620	5620SD	20-Ton	10-37/100"	20-63/100"	6-19/50"	5-3/4" x 9"	110-120 PSI	1/4" NPT	45
301-05621	5621SD	20-Ton	7"	12-3/4"	3-7/20"	5-7/10" x 8-27/100"	110-120 PSI	1/4" NPT	36
301-05630	5630SD	30-Ton	10-47/50"	20-59/100"	5-91/100"	9-13/20" x 7-9/100"	110-120 PSI	1/4" NPT	65







TITAN AIR/HYDRAULIC BOTTLE JACKS

• Cylinder is welded to the base, assuring strength and eliminating leaks • Chromed pump piston and ram for added rust resistance • Extension screw gives added height when necessary • Super low minimum height for easy access

ASCOT NO.	MFG. NO.	CAP.	MIN. HEIGHT	MAX. HEIGHT	WT. (LB.)
301-14460	14460	20-Ton	9-3/4"	18-1/2"	38
301-14461	14464	20-Ton	5/8"	10'	21
301-14475	14475	30-Ton	11"	18"	60
301-14480	14480	50-Ton	12"	19"	138



TITAN JACK PLATES

• Each unit has non-skid surface to prevent jacks from sliding under wet or oily conditions • When it is necessary to provide a firm foundation, the base of the jack shall be blocked or cribbed • Lightweight and easy to handle

ASCOT NO.	MFG. NO.	DIMENSIONS	CAPACITY	WT. (LB.)
309-14464	14464	12" x 12" x 1"	50-Ton	5
309-14465	14465	12" x 12" x 1.5"	100-Ton	8
309-14466	14466	18" x 8" x 3"	200-Ton	21
309-14468	14468	24" x 24" x 2"	100-Ton	24
309-14472	14472	18" x 18" x 1"	50-Ton	15
309-14473	14473	18" x 18" x 1.5"	100-Ton	16
309-14462	14462	36" x 36" x 2.5"	150-Ton	118
309-14463	14463	36" x 36" x 3"	200-Ton	135
309-14469	14469	18" x 18" x 2"	100-Ton	20



GRIP-IT SERIES JACK PLATES

• New pyramid surface on one side is designed to mate with Super Stacker Cribbing Blocks pyramid surface for secure, exact fit, as well as provide better grip onto uneven terrain in the field • Provides increased stability and gripping surface • Complies with OSHA regulation 29 CFR 1926.305 • CAPACITY: 100 tons • Model 14503 bottom locking plate locks onto Super Stacking Cribbing, helping to secure the load while preventing the release of hazardous energy

ASCOT NO.	MFG. NO.	TYPE	DIMENSIONS	CAPACITY	WT. (LB.)
309-14500	14500	Standard Plate	12" x 12' x 2"	100-Ton	8.8.
309-14501	14501	Standard Plate	12" x 24' x 2"	100-Ton	17.8
309-24468	14468B	Standard Plate	24" x 24' x 2"	100-Ton	36.3
309-14503	14503	Bottom Locking Plate	27" x 24" x 2"	100-Ton	38.4



ASCOT

Service Jacks

20-TON AIR/HYDRAULIC BOTTLE JACKS

- Thick jack base provides exceptional support and stability in severe conditions
- Quick-connect feature on air valve allows easy disconnect and connection of air hose & more compact storage

22-TON AIR/HYDRAULIC TRUCK JACK

- Large air motor provides an exceptional quick lifting experience
- Narrow chassis fits between tandem truck wheels
- Comes with three adapters in different sizes that cater to different working requirements



,	ASCOT NO.	MFG. NO.	DESCRIPTION	MIN. HGT.	MAX HGT.	HYD. LIFT RANGE	EXTEN. SCREW	CHASSIS SIZE	SADDLE SIZE	HANDLE LENGTH	SHIP WT. (LBS)
	301-20220	AS2022	20-Ton Air/Hydraulic Bottle Jack	10-1/8"	19-7/8"	6-1/2"	3-1/8"	N/A	N/A	9-3/8"	35.1
	301-20221	AS2022S	20-Ton Short Air/Hydraulic Bottle Jack	7"	12-5/8"	3-3/8"	2-3/9"	N/A	N/A	9-3/8"	30.6
	302-19150	AS1915	22-Ton Air/Hydraulic Truck Jack	10-1/2"	21-1/8"	6-1/8"	4-1/2"	N/A	N/A	45-1/4"	101.9



ASCOT



ASCOT NO.	MFG. NO.	DESCRIPTION	MIN. HGT.	MAX HGT.	HYD. LIFT RANGE	EXTEN. SCREW	CHASSIS SIZE	SADDLE SIZE	HANDLE LENGTH	SHIP WT. (LBS)
302-05601	AS5601	Ascot 2-Ton Low Floor Jack	2-3/4"	24"	21-1/4"	N/A	31.9" x 14"	3-7/8"	47-7/8"	102.3
302-05602	AS5602	Ascot 2-1/2-Ton Floor Jack	3-1/8"	19-3/4"	16-5/8"	N/A	26.3" x 13.5"	4-3/8"	47-7/8"	73.7
302-05613	AS5613	Ascot 3-Ton Floor Jack	3-3/8"	24-1/4"	20-7/8"	N/A	31.4" x 14.4"	3-7/8"	47-7/8"	105.4
302-05605	AS5605	Ascot 3-1/2-Ton Floor Jack	3-3/4"	20-1/2"	16-3/4"	N/A	27.2" x 14.25"	4-1/4"	47-7/8"	100
302-05614	AS5614	Ascot 4-Ton Floor Jack	4-3/8"	20-1/4"	16"	N/A	27.7" x 14.4"	4-1/4"	47-7/8"	102.5







RPG 3.5-TON SERVICE JACK

- Quick-lift dual-pump design makes it easy to reach the lifting point under your car
- Safety bypass system for cylinder protection
- Industrial grade casters for easier transportation
- Double pump piston to decrease required strokes needed to reach chassis
- Sturdy, one-piece handle
- Foam handle for vehicle protection
- · Bolt-on reinforced and heavy duty lift arm axle
- Heavy duty chassis for increased strength and durability
- · Universal joint mechanism
- · Protective saddle pad to prevent damage to the vehicle

SERVICE JACK SPECIFICATIONS

ASCOT NO.	MFG. NO.	CAPACITY (TONS)	MIN. HEIGHT / MAX. HEIGHT	HANDLE LENGTH	OVERALL LENGTH	OVERALL WIDTH	SADDLE DIAMETER	SHIPPING WEIGHT
302-62035	62035	3-1/2	3-3/4" / 21-3/4"	50-1/2"	31-1/8"	15-1/2"	4-3/4"	104.5 lb.





MAGIC LIFT™ SERVICE JACKS & LONG CHASSIS SERVICE JACKS

• Innovative design of Magic Lift offers a quicker lift for professional performance • Metered release system allows for precise load control • After the first pump reaches the lifting point, the jack continues with extraordinary lifting speed to raise the load to the desired height • Heavy gauge construction with rugged universal joint release valve for professional performance • U.S. Patented built-in by-pass device protects hydraulic system from over pumping damage • 27025, 27036 & 25036 come with a one-piece handle

SERVICE JACK SPECIFICATIONS

ASCOT NO.	MFG. NO.	CAPACITY (TONS)	MIN. HEIGHT/ MAX. HEIGHT	HANDLE LENGTH	SADDLE DIAM.	JACK SIZE	JACK HGT.	WEIGHT (LB.)
302-25057	25057	5	6-3/8" / 21-1/2"	47-1/4"	5-7/8"	52-5/8" x 18-3/8"	7-1/4"	205
302-25055	25055	2-1/2	3-1/2" / 20"	45-1/2"	4-1/2"	13-1/4" x 26-1/2"	6-1/8"	70
302-27035	27035	3-1/2	4" / 21-5/8"	50"	4-3/4"	30-7/8" x 14-7/8"	7-1/4"	106.5
302-27036	27036	3-1/2	4" / 21-5/8"	50"	4-3/4"	30-7/8" x 14-7/8"	7-1/4"	106.5



Service jacks are for lifting vehicles only. Support the vehicle with vehicle stands immediately after lifting. Do not move or dolly the vehicle with the jack. Use only on a hard level surface. Always follow the instructions accompanying the product for safe and proper use.



OMEGALIFT

3-TON ALUMINUM SERVICE JACK

• All aluminum structure provides strength and stability • Side frame handles allow for easy carrying • Extra wide wheels designed for stability under load stress • U-Joint assembly for precise load control



302-26030

1-1/2-TON HYDRAULIC LOW PROFILE MAGIC LIFT SERVICE JACK


- Extra long low side frames designed for long reach under the car chassis Innovative design of Magic Lift offers a quick lift for professional performance
- Wide stance and low center of gravity provides optimum stability under load stress • Universal joint release mechanism provides precision control of load descent in any handle position • Exclusive designed breather plug eliminates air in the hydraulic system, optimizing jack performance



ASCOT NO.	MFG. NO.	CAPACITY MIN. HEIGHT/ MFG. NO. (TONS) MAX. HEIGHT		HANDLE LENGTH	SADDLE DIAM.	JACK SIZE	JACK HGT.	WEIGHT (LB.)	
302-26030	26030	3	4" / 18-1/8"	47-3/4"	4-1/2"	26" x 13-1/4	6-1/4"	64	
302-29013	29013E	1/1/2002	2- 1/2" / 19- 7/8"	52- 1/4"	5.00"	49 -1/2" X 15 - 3/4"	7 - 1/4"	150	

2-TON LOW-RIDER FLOOR JACKS

- Super low pickup height of 2-3/4" Equipped with a double pump design to increase speed without compromising performance
- Universal joint technology and precision release valve for a more controlled release • Safety valve prevents overload
- Tough UV powder coated frame for greater protection and durability • Pinned steel saddle (1" stud) with rubber pad for added vehicle protection and durability





3.5-TON CAPACITY PROFESSIONAL HEAVY DUTY FLOOR JACKS

• Pinned steel saddle (1-1/8" stud) with rubber pad for added vehicle protection • Rear-mounted 2-3/4" swivel casters for ease of maneuverability • One-piece 50-1/4" padded handle parks upright • Handle ships separately • Equipped with a double pump design to increase speed without compromising overall performance of the jack • Second volume pump assists in getting the saddle to load much quicker than most other single pump designs on the market today

ASCOT NO.	MFG. NO.	CAPACITY (TONS)	MIN. HEIGHT / MAX. HEIGHT	LENGTH	WIDTH REAR)	WEIGHT (LB.)
302-00200	200T	2	2-3/4" / 20"	27"	15"	99
302-35002	350SS	3-1/2	4" / 19-1/2"	29"	15"	120

▲WARNING: For more information go to www.P65Warnings.ca.gov.



302-35002



Service Jacks (cont.)

2 AND 3-TON SERVICE JACKS

- One-piece handle Flanged side plates increase strength
- In-line pump provides efficient pumping operation Full swivel rear casters for easy positioning • Sealed hydraulic pump for durability • Pressure relief valve prevents overloading • Cast iron lift arm for heavy duty loads • U-joint release mechanism for precise load control • 2 Year Warranty


4 AND 10-TON LONG CHASSIS SERVICE JACKS

• Dual piston action provides speed to contact and power to lift • Long chassis for hard to reach points • Handle adjusts to three pumping positions • Heavy gauge, steel frame helps prevent distortion • "T" handle with release knob for exact positioning of load • 2 Year Warranty



ASCOT NO.	MFG. NO.	CAPACITY (TONS)	MIN. HEIGHT / MAX. HEIGHT	POWER RAISE	SADDLE DIAM.	HANDLE LENGTH	CHASSIS SIZE / HEIGHT	WT. (LB.)
302-93642	HW93642	2	4 -1/2" / 20"	15-1/2"	6 -1/4"	48"	28-1/2" x 15" / 6-3/4"	99
302-93652	HW93652	3	5-1/4" / 23-1/2"	18-1/2"	6 -3/4"	48"	31-1/2" x 15" / 7-14"	123
302-93657	HW93657	4	5-1/2" / 26-1/2"	21"	7"	51-3/4"	48" x 14-1/2"/8"	222
302-93667	HW93667	4	5-1/2" / 26-1/2"	21"	7"	51-3/4"	48" x 14-1/2"/8"	237
302-93660	HW93660	10	6-1/2" / 25-1/2"	19"	8-1/2"	53"	54" x 20-1/2"/9-1/2"	420
302-93662	HW93662	10	6-1/2" / 25-1/2"	19"	8-1/2"	53"	54" x 20-1/2"/9-1/2"	430





GT3.0 GARAGE JACK

- This 3-ton high-quality jack is designed to offer maximum performance with a sleek and professional look
- Low profile Fast reach foot pedal Double Piston Fast Lift Technology • Nylon wheels • Controlled descent

GARAGE JACKS

• The professional universal joint release valve makes it possible to lower the jack with load very precisely • The pump piston (protected with jacket to prevent from intrusion of dirt) is placed at a 45° angle so a complete pumping stroke will always be utilized • The jack has a chrome main ram



ASCOT NO.	MFG. NO.	CAPACITY (TONS)	MIN. HGT. / MAX. HGT.	WT. (LB.)
302-48301	GT3.0	3-Ton Turbo Lifter Garage Jack	3-3/4" x 20"	95

▲WARNING: For more information go to www.P65Warnings.ca.gov.



ASCOT NO.	MFG. NO.	CAPACITY (TONS)	MIN. HGT. / MAX. HGT.	WT. (LB.)
302-42003	G420330	3-Ton Turbo Lifter Garage Jack	4-3/4" / 17-3/4"	75
302-42021	G420251	2-Ton	2-15/16" / 20-1/16 "	75
302-42025	G420250	2-Ton (Low Profile)	2-15/16" / 20-1/16 "	75
302-42030	G420300	3-Ton Fast Lift (Double Piston)	4" / 19-1/2"	110
302-42031	G420331	3-Ton	4-3/4" / 17-3/4"	75
302-42032	G420302	3-Ton (Economic)	5" / 19-1/2"	94
302-42033	G420303	3.3-Ton (Turbo Lifter)	5-1/8" / 19-5/16"	94
302-42225	G420225	2.25-Ton Long Chassis (Low Profile)	3-1/2" / 20-1/4"	124
302-42250	G422500	2.5-Ton (Low Profile)	3-1/4" / 18-1/2"	104



Service Jacks (cont.)

2, 3, 5, 10 & 20-TON CAPACITY FLOOR SERVICE JACKS

- Steel hydraulic block assembly includes dust seals to prevent oil contamination • 5, 10 & 20-ton capacity jacks have one-pump to load feature
- Long, removable two-piece handle Safety bypass system protects cylinder
- Safety overload system prevents jack from being used beyond rated capacity • 5, 10 and 20-ton floor jacks feature a US patented one pump to load ability,

reducing lift time dramatically. 71202A takes 10 pumps to full rise under

20-TON CAPACITY AIR OPERATED HYDRAULIC FLOOR JACKS

- Intended for heavy duty truck, agricultural and heavy construction equipment
- Designed for use on mobile service trucks Perfect for roadside service
- Long handle with 45-1/2" reach helps in positioning of jack under vehicles with low overhang • Removable handle for shipment or storage • Hand grip also works as a stand to store the jack in a vertical position • Compact design fits easily between tandem wheels • Fast efficient air pump reduces lifting time and has a built-in relief mechanism which prevents the jack



ASCOT NO.	MFG. NO.	CAP. (TONS)	MIN. HGT. / MAX. HGT.	HANDLE LENGTH	WT. (LB.)
302-71000	71000D	10	6-1/2" / 27-1/4"	46-3/4"	455
302-71100*	71100A	10	6-1/2" / 27-1/4"	46-3/4"	466
302-71203	71203	3	3" / 19-3/4"	44-5/8"	71
302-71233	71233A	2	2-3/4" / 20"	50-1/4"	92
302-71331	71331	3	3" / 19-3/4"	44-5/8"	71
302-71335	71335	3-1/2	4" / 21-3/8"	48"	106
302-71500	71500G	5	6-1/4" / 27-1/4"	42-1/2"	119
302-71550*	71550G	5	6-1/4" / 26-1/4"	45"	270
302-72220	72220A	20	6-1/2" / 26-1/4"	45"	650
302-72230*	72230A	20	6-1/2" / 26-1/4"	45"	670



ASCOT NO.	MFG. NO.	CAPACITY (TONS)	MIN. HEIGHT / MAX. HEIGHT	WT. (LB.)
302-72081	72080A	20	11-1/8" x 28-5/8"	70
302-72091	72090A	20	8-5/5" x 22-3/4"	63

* 302-71100, 302-71550 and 302-72230 have Air Hydraulic Features



OMEGA!!!!

5, 10 AND 20-TON CAPACITY LONG CHASSIS SERVICE JACKS

- Ideal for lifting heavy trucks, buses, agricultural and heavy construction equipment with hard to access lift points
- Heavy gauge, sturdy frame helps prevent distortion or twisting • Foot pedal operation provides quick, no load lifts





ASCOT NO.	MFG. NO.	DESCRIPTION	CAP. (TONS)	MIN. HEIGHT / MAX. HEIGHT	HANDLE LENGTH	SADDLE DIAM.	JACK SIZE / HEIGHT	WT. (LB.)
302-22050	22050C	Long Chassis Service Jack	5	7-1/4" / 27-1/4"	46"	6-1/2"	55-1/2" x 18" X 18"	259
302-22051	22051C	Long Chassis Service Jack with Air	5	7" / 27"	47-1/4"	5-7/8"	56-1/2" x 18-1/4" x8"	248
302-22100	22100C	Heavy Duty Hydraulic Service Jack	10	6-7/8" / 27-1/2"	43"	7-1/4"	57-3/4" x 20" x 10"	427
302-22101	22101C	Heavy Duty Air Actuated Service Jack	10	6-3/4" / 27-1/4"	47-1/4"	7-1/4"	55" x 19" x 10"	432
302-22201	22201	Long Chassis Service Jack	20	7-1/2" / 26"	48-1/2"	6"	58-1/2" x 20" x 38" x 12"	543

HANDLE PROTECTORS

• Made of a durable synthetic rubber • Fits multiple jack manufacturers' handles and popular tire tools • Unique design ensures a tight fit on jack/tool handle without slippage • Protects vehicles from scratches or dents caused by falling jack handles and unstable tools in the shop • Patent Pending design absorbs the dent/scratch-causing force as the handle contacts an adjacent vehicle



ASCOT NO.	MFG. NO.	DESCRIPTION
	l	
448-01101	GHP-01 B	Black Handle Protector
440 01102	CUD 01 V	Yellow Handle Protector
448-01102	GHP-01 Y	reliow Hallale Protector
448-01103	GHP-01 R	Red Handle Protector
440-01103	GIIF-OI K	Red Hallule Protector







Service Jacks (cont.)



20-TON TRUCK JACKS

• Patented "Speed Pak" provides effortless lift • Large rubber wheels enhance mobility • Automatic valve prevents overloading • Extension screw permits pickup height adjustment • 2 Year Warranty

ASCOT NO.	MFG. NO.	CAP. (TONS)	MIN. / MAX. HEIGHT	POWER RAISE	HANDLE LENGTH	BASE SIZE	EXT. SCREW	OPERATING PRESSURE	WT. (LB.)
302-93731	HW93731	20	9-1/4" / 17-3/4"	5-1/2"	39-1/2"	8-3/4" x 5-1/2"	2-1/2"	110-150 PSI	69

20-TON CAPACITY AIR/HYDRAULIC SERVICE JACKS

• Compact, powerful design quickly lifts rated capacity • Large 8" rubber wheels • Low height allows lifting from axle or suspension • Pressure relief valve prevents overloading • Rapid two-speed air hydraulic action quickly advances ram to load • Chrome plated plunger for extended jack life • Optional height adapters HW93265 • 2 Year Warranty

ASCOT NO.	MFG. NO.	CAP. (TONS)	MIN. / MAX. HEIGHT	POWER RAISE	HANDLE LENGTH	BASE SIZE	EXT. SCREW	OPERATING PRESSURE	WT. (LB.)
302-93733	HW93733	20	9" /19-3/4"	6"	52-1/2"	8" x 17"	4-3/4"	110-140 PSI	88-1/2



20-TON AIR/HYDRAULIC SERVICE JACKS WITH CART

• Unit includes a welded base to prolong service • Chrome main ram and aluminium air motor guarantee optimum lifetime • Air filter, connected to hose, included • Comes on trolley

ASCOT NO.	MFG. NO.	CAP. (TONS)	MIN. / MAX. HEIGHT
302-43202	G432003	20	10" / 18-1/2"



20-TON TRUCK RAMPS

• Specifically designed for heavy-duty tasks • 33" Long T-handle increases mobile efficiency • Sold in set of two only







302-43202

302-93731

LARGE **RUBBER** WHEELS

302-93733

ASCOT NO. MFG. NO. CAP. (TONS) FRAME SIZE WHEEL DIAM. HANDLE LENGTH WT. (LB.) 302-93200 93200 20 13-1/2" x 45" 33-3/4" 267



24-TON CAPACITY SERVICE JACK

• This single stage air service jack delivers 24 Tons of lifting power • It is designed to meet and exceed the expectations of a quality jack at a very competitive price • The G432024 comes equipped with an extension screw, individual extension pegs, and heavy duty wheels designed for daily use

ASCOT NO. MFG. NO. DESCRIPTION 302-43222 G432024 24-Ton Service Jack



TITAN 22-TON AIR/HYDRAULIC SERVICE JACK

• Air operated and easy to maneuver • Single piece handle - will not break • Extension saddles include: (1 of each) 1", 2" & 4" • Operates with only 80 PSI of air pressure

ASCOT NO. MFG. NO. CAP. (TONS) WT. (LB.) MIN. HGT. 302-14140



22-TON AIR/HYDRAULIC TRUCK JACK

- Large air motor provides an exceptional quick lifting experience
- Narrow chassis fits between tandem truck wheels
- Comes with three adapters in different sizes that cater to different working requirements

ASCOT NO.	MFG. NO.	DESCRIPTION	MIN. HGT.	MAX HGT.	HYD. LIFT RANGE		CHASSIS SIZE/HT.	SADDLE SIZE	HANDLE LENGTH	SHIP WT. (LBS)
302-19150	AS1915	22-Ton Air/Hydraulic Truck Jack	10-1/2"	21-1/8"	6-1/8"	4-1/2"	N/A	N/A	45-1/4"	101.9

⚠WARNING: For more information go to www.P65Warnings.ca.gov.



Service Jacks (cont.)




302-72200

22-TON CAPACITY AXLE JACK



engineered tolerances for maximum performance • In-line filter to protect air motor from contaminants • Corrosion-resistant aluminum and nylon composite air motor • Ram extension kit included with 3/4", 2-3/4" and 4" extensions • Large 7-3/4" rear





	NO.	(TONS)	MIN. HGT. / MAX. HGT.	LIFT	REACH	WIDTH	(LB.)
302-56501	565E1	22	8-3/4" x 21-1/2"	4-3/4"	61"	13"	107

22-TON CAPACITY AIR/ HYDRAULIC FLOOR JACKS

• Long "T" handle helps in positioning jack under vehicles with obstructions of ground effects • Best seller! • Jack load release top mounted at "T" handle and allows for easy operation at any handle position • Handle locking lever secures handle in either vertical, horizontal or 45° position • Compact design fits easily between tandem wheels • Rust inhibitive coating on ram and extension screw offers longer equipment life • Large diameter wheels for easy maneuverability • Self-retracting ram eliminates manual

lowering of jack • Fast operating and extremely durable • Includes 3 adapters of differing heights

ASCOT NO.	MFG.	CAP.	MIN. HGT. /	PSI	WT.
	NO.	(TONS)	MAX. HGT.	RANGE	(LB.)
302-72200	72200D	22	9" / 18"	85-200	115

OMEGA!!!!!

HYDRAULIC AIR ACTUATED SINGLE STAGE TRUCK JACKS

• Three handle angles choices for space saving storage, easy carrying move and easy access to lifting point • Large rubber wheels for easy positioning and smooth motion • Sturdy one-piece handle assembly is standard on all Omega Truck Jacks

• Chrome plated rams • Heat-treated extension screw allows low pick-up height adjustment and maximum lift height • U.S. Patented built-in by-pass device protects hydraulic system from over pumping damage



THREE HANDLE **ANGLE**

CHOICES

302-23221

ASCOT NO.	MFG. NO.	CAP. (TONS)	MIN. HGT. / MAX. HGT.	HANDLE LENGTH	BASE SIZE	EXT. SCREW	WT. (LB.)
302-23221	23221C	22	10 / 18.5"	47-3/8"	22" x 13"	3-7/8"	100
302-23222	23222C	22	8-1/2" / 17"	47-3/8"	18-1/2" x 12-1/2"	3-7/8"	97
302-23301	23301C	30	11-1/2" / 18-1/4"	40-7/8"	21-3/4" x 12-3/4"	N/A	105
302-23501	23501	50	12" / 19"	40-7/8"	22-7/8" X 13-3/4"	-	174
302-23991	23991	100	12" / 18-1/8"	40-7/8"	26" X 15-3/4"	_	263



25-TON TRUCK JACKS

• Compact, powerful design quickly lifts rated capacity • 8-1/4" low height allows lifting from axle or suspension • Pressure relief valve prevents overloading • Specially coated ram prevents rust and extends jack life • Air assisted ram retract





ASCOT NO.		(TONS)	MIN. HGT. / MAX. HGT.	LENGTH	SIZE	SCREW	(LB.)
302-93735	HW93735A	25-Ton	8-1/4" / 21-1/2"	53"	20"x14"	5-1/8"	124



35-TON CAPACITY SERVICE JACK

· Carries a very wide hydraulic cylinder and three heavy duty wide adaptors to give it stability when lifting loads that tend to shift • Solid base makes the new jack very durable and safe to operate • Provides a low minimum height facility enabling clearance on vehicles with low suspension • Three adaptors as options this product is able to lift high trailer assemblies loaded or unloaded without issue • Recommended for carrying out up to a minimum of 30,000 lifts without fail • 3 Year Warranty

ASCOT NO.	MFG. NO.	CAP. (TONS)	MIN. HGT. / MAX. HGT.	WT. (LB.)
302-03531	GT-3531	35	7-9/32" / 16-11/16"	93









22-TON CAPACITY AIR OPERATED HYDRAULIC FLOOR JACKS • All steel-welded construction built for heavy duty use • Long 50" T-handle for easy positioning of jack under vehicles with low overhang • Quick-lift mechanism allows for substantially shortened ram-lifting time when no load is involved • Spring return for self retraction • Extension screw for fine adjustment beyond rated capacity or lifting limit • Built-in safety valve prevents use beyond rated capacity • Specially processed air pump for low-noise operation

		CAP.	MIN. HGT. /	FRAME	CYLINDER	EXT.	WT.
		, ,	MAX. HGT.				
224	ZATJ-22S-4	22	8" x 15-7/8"	7-1/4"	4-1/4"	3-5/8"	82

45/20-TON 2-STAGE SERVICE JACK

• Provides an even lower minimum of under 6" to get under Buses, RV's, and Car Haulers • Built-in air regulator and water separator prolong the life of the jacks • Solid base makes the new jack very durable and safe to operate • Long handle and truer balance makes it easy to maneuver under a vehicle • 3 Year Warranty





ASCOT NO.	MFG. NO.	CAP. (TONS)	MIN. HGT. / MAX. HGT.	WT. (LB.)
302-04532	GT-4532	45/20	4-7/8" / 16-1/2"	99



ASCOT 302-00

Service Jacks (cont.)

YAK 22/11-TON STANDARD AIR/ HYDRAULIC JACK

- · Extremely light, compact and efficient
- · Made up with the best materials on the market
- Models 92000 and 92001 represent the technological leading edge of our product range
- Included are 0.5" | 12.7 mm and (2) 2.35" | 60 mm Extensions
- Stroke: 6.5"
- Air Pressure: 116-145 PSI
- Min. Height: 5.5", Max. Height: 12.05"
- · Weight: 38.5 Lbs.



ASCOT NO. MFG. NO.

92000 22/11-Ton Standard Air Hydraulic Jack



302-92004

All Yak Jacks come with a 3-year extended warranty YAK 3 STAGE 66/33/17-TON AIR/ HYDRAULIC JACK • Air hydraulic jacks with pistons moving back automatically. • Specifically designed for lifting buses and all vehicles with low profile axles

• Stroke: 5"

• Air Pressure: 116-145 PSI

• Min. Height: 5.31", Max. Height: 10.05"

· Weight: 110 Lbs.



ASCOT NO.

DESCRIPTION

3 Stage 66/33/17-Ton Air Hydraulic Jack



MFG. NO. 92007 302-92007



YAK 44/22-TON AIR/ HYDRAULIC HD JACK

- · Air hydraulic jack for heavy vehicles, practical and easy to handle
- The pistons move back automatically; the two descent valves guarantee perfect holding in all situations and controlled speed under load
- · Ideal for workshops, mobile workshops, tire repairers and bodywork shops
- Stroke: 6"
- · Air Pressure: 116-145 PSI
- Min. Height: 8.54", Max. Height: 18.38"
- · Weight: 101 Lbs.



ASCOT NO. 302-92004

MFG. NO. 92004

44/22-Ton Air/Hydraulic HD Jack

YAK 4 STAGE 88/55/28/17-TON AIR/HYDRAULIC JACK

· Air hydraulic jack for heavy vehicles, practical and effective

• The pistons move back automatically; the two descent valves guarantee perfect holding in all situations and controlled speed under load

• A complete range of jacks for all stroke and capacity requirements

· Ideal for workshops, tire repairers and bodywork shops

• Stroke: 11"

· Air Pressure: 116-145 PSI

• Min. Height: 7.09", Max. Height: 18.89"

· Weight: 170 Lbs.



MFG. NO. ASCOT NO.

302-92010

92010







302-92007





LONG

T-HANDLE

DOUBLE

ACTING

PUMP



44-TON CAPACITY AIR/HYDRAULIC FLOOR JACKS

- Designed for heavy duty truck, agricultural and heavy construction equipment Ideal for loaded truck and trailer roadside service calls • Heavy enough for rail and bus work • 61.75" Long "T" handle helps in positioning jack under vehicles with low overhang • Handle locking lever secures handle in either vertical, horizontal or 45 degree position
- · Overload systems prevent cylinder damage and prevent the jack from being used beyond the ASME/PASE loadlimiting standard • Rust inhibitive coating on rams offers longer life • Integrated filter protects air motor • Double acting pump raises ram more quickly to the load • Suspension loaded axle prevents wheel damage • Vacuum operated ram retraction eliminates manual lowering of jack • Safety button at the top of the handle can be pushed in to immediately stop the jack operation in case of emergency • A double acting pump raises the ram more quickly to the load • Includes a 2-3/4" diameter saddle, 2" and 4" long stackable extensions and extension holder • Made in Italy

ASCOT NO.	MFG. NO.	CAPACITY (TONS)	MIN. HEIGHT / MAX. HEIGHT	PSI RANGE	WT. (LB.)
302-72244	72244	44	9-1/4" x 15-5/8"	130-175	149

ASCUT NO.	MFG. NO.	DESCRIPTION
		VAILABLE ACCESSORIES
302-72204	72204	4" Extension Adapter
302-72206	72206	2-3/4" Diameter Lifting Saddle

30. 50 AND 55-TON CAPACITY AIR/ HYDRAULIC TELESCOPIC FLOOR JACKS

- Long "T" handle for positioning jack under vehicles with low overhang Low profile
- Handle locking lever secures handle in either vertical, horizontal or 45° position
- Safety overload system prevents cylinder damage Rust inhibitive coating on rams
- Integrated filter protects air motor Double acting pump raises ram more quickly to the load • Suspension loaded axle prevents wheel damage • Made in Italy







ASCOT NO.	MFG. NO.	CAP. (TONS)	MIN. HEIGHT / MAX. HEIGHT	STROKE	CHASSIS SIZE	WHEEL DIAM.	PSI RANGE	WT. (LB.)
302-72212	72212	55	5.9" / 15.4"	9.5"	8.6" x 39.3"	7"	100-175	233
302-72218	72218	33	5.9" / 12.71"	7.3"	8.5" x 49.2"	8-1/2"	120-175	106
302-72225	72225	50	8.7" / 16.6"	7.9"	8.6" x 39.3"	7"	120-175	235



Service Jacks (cont.)

HIGH TONNAGE JACKS

- Load blocking system Remote control for working safely
- Various extensions to suit all operations All models are hydro-pneumatically operated and equipped with a dual descent valve for greater control when bearing weight and automatic piston return • Can also be fitted with a manual emergency pump (on request) • Made in Italy



ASCOT NO.	MFG. NO.	DESCRIPTION	CAPACITY
302-91000	91000	High Tonnage Jack	25/50/80-Ton Stages
302-91001	91001	High TonnageJack	30/60-Ton Stages
302-91003	91003	High Tonnage Jack	50/80-Ton Stages
302-91004	91004	High Tonnage Jack	100-Ton
302-91005	91005	High Tonnage Jack	150-Ton



HIGH TONNAGE JUMBO JACKS

- Ideal for giant tire changing, mining, railroads, construction rigging
- No need for cribbing time savings! Balanced for easy moving Large pneumatic wheels • Only 23" wide, the jacks fit in tight spots • 50" long, 8 position handle for easy tilt back and moving of the jack • Welded fully enclosed heavy-duty steel frame with built in lifting holes • Hydraulic radial piston pump • Minimum 90 to 150 psi air supply needed to power hydraulic pump • Extension holders bolted to frame for easy storage • Easy to change oil filter • All Jacks come with 5" & 9" extentions & 1" saddle • Made in Canada





The High Tonnage Jumbo Jack in use.

ASCOT NO.	MFG. NO.	CAP. (TONS)	COLLAPSED POINT	STROKE	LIFTING HEIGHT
308-10320	10320	150	27"	14-3/8"	41-3/8"
308-10321	10321	150	36"	22-3/8"	58-3/8"
308-10322	10322	100	27"	14-3/8"	41-3/8"
308-10323	10323	200	27"	14-1/2"	41-1/2"
308-10324	10324	250	27"	14"	41"



RPG,

Jack Stands

3, 6 & 12-TON JACK STANDS

• Heavy-duty jack stands that are suitable for emergency tire changes, repairs and more • Ratchet height adjustment built within column • Wide base for added stability • Multi-leveled ductile iron ratchet bar adds strength and durability • Sold in pairs of two

NOW FEATURING A DOUBLE LOCK SAFETY PIN FOR ADDED SECURITY



10-TON HIGH JACK STANDS (PAIR)

• Pin-style stands with supporting range from 27.95" to 47.56" suitable for high-height applications

• Heavy-duty tubular steel design provides stability and rigidity • Multiple pin holes to allow easy adjustment to desired height • Saddle with lugs for easy positioning of the load

• Sold and to be used only in pairs

PIN-STYLE STANDS



22-TON JACK **STANDS**

• Used in pairs for supporting trucks, trailers, and equipment in fleet garages, agricultural, industrial and construction environments • Sturdy, welded steel construction for exceptional safety and strength

• Heavy gauge steel helps prevent distortion or twisting

· Wide base for added stability • Multi-position iron column bar for convenient height adjustment • Sold in pairs of two



302-63220

ASCOT NO. MFG. NO. DESCRIPTION

Support Pin for 22-Ton Jack Stands 302-63221

ASCOT NO.	MFG. NO.	CAPACITY (TONS)	BASE SIZE	MIN. HEIGHT / MAX. HEIGHT	SHIPPING WEIGHT
302-51005	510005	10	16-7/32" x 16-7/32"	27-61/64" / 47-9/16"	123.2 lb.
302-63220	63220	22	9-7/8" x 9-7/8"	13-3/8" / 19-5/8"	63.3 lb.
302-63030	63030	3-Ton	7-5/8" x 6-7/8"	11" / 16-3/8"	14.9 lb.
302-63060	63060	6-Ton	11" x 9-3/4"	15-3/4" / 24-3/8"	32 lb.
302-63120	63120	12-Ton	11-3/4" x 10-5/8"	17-1/2" / 27-1/2"	56 lb.

Jack Stands (cont.)

NORCO JACK STANDS

- Unique spring loaded pawl provides constant locking pressure against lifting column when raising the column to the load - the benefit is that it makes it a one-handed operation
- Four legged base with foot pads for added strength and more secure footing
- Common machine bolt secures lifting column to stand and provides stability
- Recessed column saddle for acceptance of vehicle panel rail
- Design qualification tested to 200% of rated capacity
- · Capacity is per pair





SECURE FOOTING



ASCOT NO.	MFG. NO.	CAP. (TONS)	MIN. HGT. / MAX. HGT.	HEIGHT INTERVALS	SADDLE SIZE	BASE SIZE	WT./PR (LB.)
			DOMES	STIC			
302-81205	81205	5	9-1/2" / 15-3/4"	3" x 2"	3" x 4-1/2"	9" x 9"	38
302-81208	81208	10	10-1/2" / 17"	4" x 1-1/2"	3" x 5"	12-1/2" x 12-1/2"	60
302-81209	81209	10	18-1/2" / 30"	7" x 1-1/2"	3" x 5"	17" x 17"	80
302-81210	81210	10	28" / 47"	10" x 2"	3" x 5"	16" x 16"	106
302-81225	81225	25	12" / 20"	3" x 3"	2-1/4" x 3-1/4"	10" x 10"	65
			IMPO				
302-81004	81004C	3	12" / 17-1/2"	9/16"	1-1/8" x 4-9/16"	7-1/2" x 7-7/8"	19
302-81006	81006D	6	16-1/4" / 24-7/8"	5/8"	1-1/8" x 4-7/8"	10-1/16" x 11-1/16"	30
302-81012	81012	12	19-5/8" / 29-3/8"	1-1/4"	1-5/8" x 4-3/4"	13" x 15"	86
302-82205	81205i	5	9-1/2" / 15-3/4"	3" x 2"	3" x 4-1/2"	9" x 9"	38
302-82208	81208i	10	10-1/2" / 17"	4" x 1-1/2"	3" x 5"	12-1/2" x 12-1/2"	60
302-82209	81209i	10	18-1/2" / 30"	7" x 1-1/2"	3" x 5"	17" x 17"	80
302-82210	81210i	10	28" / 47"	10" x 2"	3" x 5"	16" x 16"	106

HEIN-WERNER AUTOMOTIVE

3 AND 6-TON **JACK STANDS**

- · Saddle column provides ratchet action height adjustment
- Dual purpose handle serves as carry handle and saddle column release • Multi position ratchet bar provides strength and durability • Formed base adds stability and helps reduce sinkage into pavement



302-93524

302-93511

LOW

PROFILE MUSCLE

WORK

302-93506

ASCOT NO.	MFG. NO.	CAP. (TONS)	MIN. HGT. /MAX. HGT.	HEIGHT INTERVALS	SADDLE SIZE	BASE SIZE	WT. (LB.)
302-93503	HW93503	3	12-1/8" / 19"	5/8"	7-1/2" x 9"	1" x 4-1/2"	18.5
302-93506	HW93506	6	16-1/4" / 25-3/4"	5/8"	10-1/2" x 13"	1" x 5"	41

7-TON FORKLIFT STAND

· Low profile muscle work for forklifts and heavy machinery

• Wide, square base for maximum load stability • Adjusts from 9-1/2" to 15-3/4" at 1" intervals • Heavy duty holding pins for adjustable heights • Lightweight for portability and ease of positioning



MIN./MAX. SADDLE CAP IACK WT ASCOT NO. MEG NO (TONS) SI7F HGT. SI7F (LB.) 9.88" x 302-93524 HW93524F 12.38" / 2.25" / 90 20.38" 3.25' 9.88'



10-TON PIN-STYLE JACK STAND

- · Ideal for fleet, agricultural and construction maintenance
- Pin style column adjusts in 2" height intervals
- Heavy duty square tubing Large saddle securely supports load • Sold in pairs • Capacity is per pair

ASCOT NO.	MFG. NO.	CAP. (TONS)	MIN. HGT. / MAX. HGT.	BASE SIZE	WT. (LB.)
302-93511	HW93511	10	30" / 52"	19" x 19"	148

10-TON JACK STANDS

• Ideal for fleet, agricultural and construction maintenance • Heavy duty pin style height adjustment • Wide, square tubing construction and base for maximum load stability • Adjusts from 19-1/2" to 31-1/2" in 2" intervals • Large saddle secures load • Integrated carrying handle • Sold and to be used in pairs • Capacity is per pair





ASCOT NO.	MFG. NO.	CAP. (TONS)	MIN. HGT. / MAX. HGT.	BASE SIZE	WT. (LB.)
302-93512	HW93512	10	20 "/ 31-1/2"	16"x16"	90

OMEGA!!!!

3, 6 AND 12-TON CAPACITY "RATCHET STYLE" STANDS

• Counter-weighted pawl serves as a safe, secure locking device to prevent the load from accidentally disengaging

• Sturdy, welded steel construction for superior safety and strength

• One piece, multi-position ductile ratchet bar provides super strength and durability, and guick adjustment mechanism that securely lock into desired location

· Sold and to be used only in pairs

Capacity is per pair





302-32038

ASCOT NO.	MFG. NO.	CAP. (TONS)	MIN. HGT. / MAX. HGT.	SADDLE SIZE	BASE SIZE	WT. (LB.)
302-32038	32038	3	11-38" / 16.75"	3.00" / 1.00"	7.63" x 6.88"	13.9
302-32068	32068	6	16.00" / 23.50"	3.75" x 1.00"	10.50" x 8.88"	27.5
302-32125	32125B	12	19.63" / 29.88"	5.13" x 1.75"	12.38" x 12.50"	42.1



Jack Stands (cont.)



CAP. (TONS) MIN. HGT. / MAX. HGT. 302-14360 9-1/2" / 16-1/2"

OMEGA!!!!!

10 AND 22-TON CAPACITY PIN-STYLE JACK STANDS

STURDY, WELDED STEEL



ASCOT NO.	MFG. NO.	CAP. (TONS)	MIN. HGT. / MAX. HGT.	SADDLE SIZE	BASE SIZE	WT. (LB.)
302-32105	32105B	10	18-5/8" / 31-1/8"	3-1/8" x 5"	16-1/8" x 15-5/8"	84
302-32107	32107B	10	28" / 47-5/8"	3-3/8" x 5"	16-1/4" x 46-1/4"	109
302-32225	32225B	22	12" / 19-5/8"	3-1/8" x 2-3/4"	9-7/8" / 9-7/8"	66

302-32225



12-TON JACK STAND WITH PIN AND WHEELS

· All stands have a heavy duty robot welded frame, and a multi-position ductile ratchet bar • The quick adjustment mechanism securely locks into the right location • Includes counter-weighted pawl for safe



ASCOT NO.	MFG. NO.	CAP. (TONS)	MIN. HGT. / MAX. HGT.	BASE SIZE	WT. (LB.)
302-45125	G451205	12	11-4/5" / 18-1/10"	19"x19"	144





20-TON SCREW STYLE JACK STAND

- Screw-style stand makes it easy to hold load at desired height and secure with locking collar
- Adjustable screw for height extension and retraction
- Heavy duty design and application



ASCOT NO.	MFG. NO.	CAP. (TONS)	MIN. HGT. / MAX. HGT.	BASE THICKNESS	BASE SIZE	WT. (LB.)
302-10802	10802	20	16.5" x 26.5"	1/4"	13" x 13"	65
302-10803	10803	20	26" x 46"	1/4"	13" x 13"	82



ASCOT NO.	MFG. NO.	CAP. (TONS)	MIN. HGT. / MAX. HGT.	HEIGHT INTERVALS	BASE SIZE	WT. (LB.)	
302-93526	HW93526F	25	12-3/8" / 20-3/8"	2-1/8"	10" x 10"	90	

25-TON CAPACITY **JACK STANDS**

• Intended for fleet and maintenance garages where low profile stands are used to support loaded trailers • Pin-type support column adjusts to four different height positions • Adjustment pin is secured to stand to prevent loss • Handle provides ease of positioning and carrying • 3/8" thick solid steel base plate for stability



ASC	OT NO.					HEIGHT INTERVALS				
302	-81225	81225	US	25	12" / 20"	3" x 3"	2-1/4" x 3-1/4"	10" x 10"	65	
302	-82225	81225i	Import	25	12" / 20"	3" x 3"	2-1/4" x 3-1/4"			

20-TON CAPACITY HEAVY **DUTY JACK STANDS**

• Sturdy, welded steel construction for superior safety and strength • Heavy gauge, steel frame helps prevent distortion or twisting • Sold in pairs • Capacity is per pair



ASCOT NO.	MFG. NO.	CAP. (TONS)	MIN. HGT. / MAX. HGT.	WT. (LB.)
302-14400	14400	20	12" / 20"	72



Specialty Jacks

4-TON CAPACITY FORKLIFT JACK

• Two-position saddle at scissors end can be quickly rotated to handle either edges or flat surfaces of a load • 2-1/4" low lift height at scissors end • 30" removable handle for ease of pumping and storage when not in use • Our "fingertip control" release knob provides slow, controlled, lowering of the load

· Safety bypass and overload systems prevent cylinder damage and prevent the jack from being used beyond the ASME/PASE load-limiting standard



OVERALL WIDTH ASCOT NO MEG NO CAP (TONS) MIN HGT / MAX HGT OVERALL LENGTH (LB.) 302-72036 72036D 2-1/4" / 16-1/4" 26-1/8" 8-3/4"

10-TON CAPACITY AIR LIFT JACK

• Designed for use in truck and farm equipment dealer garages, heavy duty construction repair shops and bus company garages • Three-way heavy duty air valve provides fine control when lifting or lowering a vehicle • Automatic safety lock engages in six different height positions independent of air pressure • Designed for lifting entire front or rear of a vehicle • Front swivel caster wheel and two 12-1/4" diameter pneumatic rear tires provide easy maneuverability · Adjustable lifting saddles can be raised

and extended to desired position

3-WAY **HEAVY DUTY**



58"

59-1/2"

13-5/8"

15"

17-3/4"

18-1/8"



ASCOT NO.	MFG. NO.	CAP. (TONS)	HGT. / MAX. HGT.	PSI FOR RATED LOAD	WT. (LB.)
308-82999	82999	10	12-1/2" / 50"	200	638
308-83999	83999i	10	12-1/4" / 49-1/2"	200	817

82990C

82992

10

15

17-3/4" / 49-3/8"

18-1/8" / 51-3/8"

308-82990

308-82992

178

279

11-1/2"

11-1/4"

OMEGA!!!!!

4-TON CAPACITY **FORKLIFT JACK**

- Dual lift points for various lifting applications: The lower point is for forklift truck lifts and the higher point is for most farm equipment lifts
- Precision control of lifting and lowering functions

10-TON AIR JACK AND SUPPORT STAND

• Operates as both a support stand and air actuated jack • Completely air operated and has a heavy duty pin locking system • Comes with a 10 foot air hose and maneuverable wheel base for easy accurate positioning • A total lift range of 17-1/2" to 51" makes it a very versatile and helpful piece of equipment



MFG. NO.

HW93659

(TONS)

4

ASCOT NO.

302-93659

⚠WARNING: For more information go to www.P65Warnings.ca.gov.

POWER

RAISE

14"

MIN. HGT./MAX.

2-1/2" / 16-1/2"

HANDLE

LENGTH

25"

BASE SIZE

8" x 26-1/2"

(LB.)

71


Specialty Jacks (cont.)





TJ-110 LIFTING JACK

• The TJ-110 Lifting Jack has an 11-ton lifting capacity and is ideal for lifting larger Off-Highway and heavy farm equipment • Works great on truck and trailers too! • The extending piston increases lifting range without the need for blocks • Designed and built with dependability and safety in mind • The large saddle helps to minimize slippage while the large base increases stability • An aluminum cylinder helps to decrease the overall weight of the unit • Equipped with a 3-way air control valve for fast action



10-TON AIR **OPERATED** WHEEL LIFT SYSTEM

- · Lifts engage wheels without needing to remove panels on vehicle
- Raise front or rear end of vehicle using a single controller • Load retention pin allows lifts to function as stands in six different positions • Completely air operated • 2 Year Warranty • Sold in pairs



								- Wa
ASCOT NO.	MFG. NO.	CAP. (TONS)	MIN. HGT. / MAX. HGT.	POWER RAISE	WHEEL DIAM. MIN./MAX.	FRAME SIZE (W X D X H)	PSI	WT. (LB.)
308-93693	HW93693	10	Floor Level / 24"	24"	19-1/2" / 24-1/2"	41-9/16" x 44-1/4" x 53-1/4"	160	1,234

308-00110 OR LARGER **EQUIPMENT** LARGE

ASCOT NO.	MFG. NO.	CAP. (TONS)	MIN. HGT. / MAX. HGT.
308-00110	TJ-110	11	19" / 50"





Transmission Jacks

1/2-TON CAPACITY TRANSMISSION JACK

Wide chassis with open front provides:

• Wider opening for saddle and transmission to come UNIVERSAL lower to the ground for easy removal • Efficient load **SADDLE** distribution and stability • Easy access to saddle tilt knobs • Fully adjustable universal saddle with adjustable corner brackets and safety chain • Safety by-pass system prevents damage to cylinder • Safety overload system prevents jack from being used beyond its rated capacity • Full 360 degree rotating pump handle operates in any position • Flash chromed ram inhibits rust from entering the hydraulic system • Four full-swivel ball bearing caster wheels for easy positioning • Wide chassis

for efficient load distribution and stability • Norco manufactures over 20 vehicle and service specific adapters to enhance the capabilities of their transmission jacks • MADE IN THE USA

1/2-TON CAPACITY UNDER HOIST TRANSMISSION JACKS

of their transmission jacks • Made in Taiwan

• Fully adjustable universal saddle with adjustable corner brackets and safety chain • Safety overload system prevents jack from being used beyond rated capacity • Foot operated pump and lowering pedals • Two-stage flash chromed rams inhibit rust from entering hydraulic system • 371-72550B same as 371-72500E but lifts the load twice as fast with it's US Patented FASTJACK mechanism • Norco manufactures over 20 vehicle and service specific adapters to enhance the capabilities



SAFETY

OVERLOAD

371-72450

WT. ASCOT NO. MFG. NO. (TONS) MIN. HGT. / MAX. HGT. (LB.) 371-72050 72050C 1/2 7-3/4" / 30-3/8" 138

1-1/2-TON CAPACITY TRUCK TRANSMISSION JACKS

• For heavy truck transmissions

• Fully adjustable universal saddle with adjustable arms to position the transmission • Heavy duty chain with convenient chain tensioner secures load to saddle • Safety bypass system prevents damage to the hydraulic cylinder • Norco manufactures over 20 vehicle and service specific adapters to enhance the capabilities

of their transmission jacks



▲WARNING: For more information go to www.P65Warnings.ca.gov.

371-72050

ASCOT NO.	MFG. NO.	CAP. (TONS)	MIN. HGT. / MAX. HGT.	WHEEL DIAM.	CHASSIS SIZE	SADDLE SIZE	WT. (LB.)
DOMESTIC							
371-72000	72000E	1-1/2	7-3/4" / 36-1/2"	4"	25" / 45"	10-1/4" / 11"	310
371-72001	72000Ei	1-1/2	7-3/4" / 35-2/4"	4"	26-1/2" / 44-1/2"	10-1/4" / 15-1/4"	302

ASCOT NO.	MFG. NO.	CAP. (TONS)	MIN. HGT. / MAX. HGT.	WT. (LB.)
371-72450	72450B	1/2	36" / 75"	175
371-72501	72500E	1/2	35" / 72"	176
371-72550	72550B	1/2	35" / 72"	178





Transmission Jacks (cont.)

1-TON CAPACITY HYDRAULIC TRANSMISSION JACK

• Designed for the removal, installation and transportation (in the lowered position) of heavy duty truck transmissions that are raised by an above-ground lift • Air/hydraulic foot pump for hands free operation • Fully adjustable universal saddle with adjustable arms • Heavy duty chain with chain tensioner to secure load to saddle • Made in Taiwan








ASCOT NO.	MFG.	CAP.	MIN. HGT. /	WT
	NO.	(TONS)	MAX. HGT.	(LB.
371-72701	72701A	1	41-1/4" / 69-3/8"	273

TRANSMISSION JACK & FUEL TANK REMOVER ADAPTERS

• Allows for a safer and guicker removal of transmissions that are not flat on the bottom • Adapters fit transmission jacks 72050E, 72500E and 72550B



309-72533

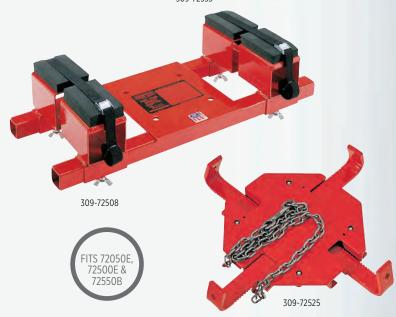

ASCOT NO.	MFG. NO.	DESCRIPTION
309-72501	72501B	Adapter for use on GMC 4-Wheel Drive Transmission Case. WEIGHT: 18 lb.
309-72502	72502B	Adapter for use on 4 and 5 Speed Truck Transmissions. WEIGHT: 13 lb.
309-72504	72504B	Adapter for use on GMC Front Wheel Drive Transmissions. WEIGHT: 24 lb.
309-72505	72505B	Adapter for use on GMC Front Wheel Drive Transmissions (X, J and A Bodies) 3T40. WEIGHT: 15 lb.
309-72506	72506B	Adapter for use on GMC 440 Metric Transmissions 4T60-E. WEIGHT: 11-1/2 lb.
309-72507	72507A	Adapter for use on Ford 640E & 4R100 (4WD) Truck & Van Transmissions
309-72508	72508	Fuel Tank Adapter
309-72517	72507B	Adapter for use on Ford E40D Truck Transmissions. WEIGHT: 34 lb.
309-72525	72525	Optional saddle that replaces the four Adjustable Corner Brackets found on Standard and Universal Saddles
309-72533	72533	This tool will allow for the safe and secure removal and installation of DPFs, Drive Shafts, and automotive transmissions up to 750lb. The bean bag eliminates the need for individual DPF transmission adapters.







1-TON FLOOR STYLE TRANSMISSION JACK

· Wishbone design allows unit more mobility · Wide stance tubular steel frame equipped with 4 ball bearing 360° swivel casters • Two heavy cast adjustable mounting plates and load restraint chain • Built in relief valves prevent overloading • 2 Year Warranty







ASCOT NO.	MFG. NO.	CAP. (TONS)	MIN. HGT. / MAX. HGT.			WT. (LB.)
371-93718	HW93718	1	10-1/4" / 45-1/4"	47-1/2" / 28-1/4"	13° L & R	309

FUEL TANK ADAPTER FOR OMEGALIFT AND HEIN-WERNER TRANSMISSION JACKS

- Specifically designed to enable the telescopic transmission jack to be used in the removal and installation of fuel tanks • Maximum tank size of 40 gallons • Two (2x) ratcheting nylon safety straps
- Four (4x) padded arms to avoid damage on metal tank



ASCOT NO. 309-40080

MFG. NO. 40080

DESCRIPTION

Fuel Tank Adapter for OmegaLift and Hein-Werner Transmission Jacks

▲WARNING: For more information go to www.P65Warnings.ca.gov.

FULLER ROAD RANGER TRANSMISSION ADAPTER FOR HW93718

• Fuller Transmission Kit for HW93718



309-93248

ASCOT NO. MFG. NO. 309-93248 HW93248

DESCRIPTION

Fuller Road Ranger Transmission Adapter for HW93718

HEIN-WERNER MULTIPURPOSE TRANSMISSION ADAPTER

• Optional, for use with HW93720



ASCOT NO. 309-93721

MFG. NO. HW93721 DESCRIPTION

Hein-Werner - Multipurpose Transmission Adapter



Transmission Jacks (cont.)

TELESCOPIC TRANSMISSION JACK

• First stage utilizes air for a quick initial rise • Second stage uses hydraulic hand pump for precise control • Four ratcheting brackets fit transmission pan flanges • Hefty nylon safety strap helps anchor transmission • Wide spread casters for smooth maneuverability • Head adjustments made easy with big easy-to-grip crank handles • Optional adapters available • 2 Year Warranty



ASCOT NO.	MFG. NO.	CAP. (TONS)	MIN. HGT. / MAX. HGT.	LIFTING HEAD HGT.	CHASSIS SIZE	FORWARD TILT / REAR TILT	SIDEWAY TILT	WT.
371-93720	HW93720	1/2	34"-1/2 / 72"	11-3/8" x 11-3/8"	41-1/4" / 41-1/4"	50°/20°	11° L & R	117





TELESCOPIC TRANSMISSION JACK

- · Chrome-plated rams maximize its high reach operated by a user friendly foot pedal · Extra-wide base lowers center of gravity and promotes stability • Rugged steel wheels and full swivel ball bearing casters • Adjustable ratchet style saddle (Model 41000C and 41001C) • A unique release pedal provides safety in lowering the load
- Model 41000C and 41001C are 2 stage manual Model 41001C is Air Actuated and requires 110-175 PSI

ASCOT NO.	MFG. NO.	CAP. (TONS)	MIN. HGT. / MAX. HGT.	SADDLE BASE	MIN. EXP. SADDLE AREA	MAX. EXP. SADDLE AREA	JACK SIZE	WT. (LB.)
371-41000	41000C	1/2	39-22/25" / 77-1/4"	12-5/8" x 7-7/8"	12-5/8" x 7-7/8"	21" x 21"	33-13/100" x 35-1/2"	161
371-41001	41001C	1/2	39-7/8" / 77-1/4"	11-1/2" x 11-1/2"	11-1/2" x 11-1/2"	21" x 21"	33-13/100" x 35-1/2"	171
371-42003	42003	1	46" / 74-3/4	13 x 13	13 x 13	24-1/2" x 19"	42" x 39-3/4"	294

FLOOR-STYLE TELESCOPIC TRANSMISSION JACK

• The adjustable head can be tilted forward, backward and side to side for optimum alignment of transmission bolt pattern and pins • Hydraulic system is protected from internal damage by a patented by-pass mechanism • Load-restraining chain is vital for raising and lowering safety • Four wheel casters allow easy movement and positioning of transmission jack • Rugged steel wheels and full swivel ball bearing casters • User friendly 360° rotating pumping socket for maximum in directional operation

ASCOT NO.	MFG. NO.	CAP. (TONS)	MIN. HGT. / MAX. HGT.	SADDLE BASE	HANDLE LENGTH	EXP. SADDLE AREA	JACK SIZE	WT. (LB.)
371-42000	42000C	_1	7-3/4" / 33"	14-3/4" x 7-7/8"	22-1/2"	17" x 15-1/2"	39-3/8" x 19-1/8"	200
371-43000	43000	1-1/2	7-7/8" / 37-1/4"	14-3/4" x 16-1/8"	29-1/2"	16-1/8" x 26-7/8"	46-3/4" x 25-5/8"	376







Wheel Dollies

1/2-TON CAPACITY HYDRAULIC WHEEL DOLLY

- For the removal and installation of single, tandem and duplex tires and wheels which are mounted on trucks that are supported above ground level
- Heavy duty lift arms made with ball bearing conveyor rollers allow easy rotation of wheels for alignment with bolt pattern
- 7-1/2" of side-to-side lift arm adjustment eliminates the trial and error method of aligning the rim's lug holes with the wheel drum
- A 1500-pound capacity heavy duty winch with 5-to-1 gear ratio provides ease of operation
- The winch gear design acts as a brake and allow the load to be lowered incrementally if desired and without the need of constant hand pressure against the crank handle
- · A hydraulic jack tilts the lift arms in order to match the angle of the spindle
- Safety chain provided to secure tires and wheels to the dolly
- Maneuverability is made easy by means of two rear mounted ball bearing swivel caster wheels. The caster wheels include a locking mechanism which can prevent the dolly from moving
- Perfect for use with truck lifts
- ASSEMBLED IN THE USA
- 82304 includes air-operated pump that allows the unit to lift the load effortlessly



AUTOMOTIVE

407-93766

3/4-TON WHEEL DOLLY

- For handling of dual wheels and large single wheels
- Designed to facilitate the removal and installation of pneumatic tires and wheel assemblies found on many trucks, buses and trailers
- Handles up to 52" diameter tires and wheels
- The frame is constructed from heavy gauge welded tubular steel for maximum strength and durability
- · Load levelers aid alignment
- · Carriage arm rollers with self-lubricating bearings
- · Restraining chain with the unit to secure the load
- · 2 swivel ball bearing casters for easy positioning
- Wide frame and lifting carriage
- · Handy tool/parts tray on frame
- The wheel dolly is designed to be used in conjunction with jacks and jacks stands
- · 2 Year Warranty

ASCOT NO.	MFG. NO.	CAP. (TONS)	LIFT RANGE	ARM LENGTH / SPREAD	OVERALL SIZE (W X D X H)	WT. (LB.)
407-93766	HW93766	3/4	4" - 9"	23" / 26-1/2"	39-1/2" x 38-3/4" x 32"	118







Wheel Dollies (cont.)

3/4-TON WHEEL DOLLY

POSITION

TRUCK WHEEL DOLLY

FAST AND

truck wheels for effortless removal or replacement



ASCOT NO.	MFG. NO.	0,		LIFT ARM SIZE	PRODUCT SIZE (W X D X H)	WT. (LB.)
407-82320	82320	3/4	4-3/4"	26" x 24-1/2"	43-1/2" x 39-1/2" x 35"	175

TIRE DOLLIES

• Heavy-duty tubular steel construction capable of handling 300 pounds • Easy grip handle along with improved "bent arm" design improves leverage for easier installation and minimizes back strain • Steel alignment rollers for simple alignment of the wheel to the wheel studs • Spring-loaded kickstand offers convenient storage • Can accommodate tire diameters from 36" to 48"

407-82310



ASCOT NO.	MFG. NO.	DESCRIPTION	
407-70130	70130	TRUCK: 8" Rollers (280 lb. Capacity)	7
407-70132	70132	SUPER SINGLE: 14" Rollers (450 lb. Ca	pacity)

407-70130

ASCOT NO. MFG. NO. DESCRIPTION 407-82310 82310 22" Narrow Single Tire Handler Dolly 407-82312 82312 26" Wide Single Tire Handler Dolly



TW2000 TWEEL HANDLER™

• The TW2000 solution is a built-in ratcheting lack with 14° of vertical travel • The Tweel Handler's U-shaped chassis allows you to get close to the work area, with unhindered access to the tire in the cradle • No restraining chains are required, yet the Tweel Handler[™] holds virtually any single truck wheel, including widebased singles • Three heavy-duty ball-bearing wheels mounted under ball-bearing swivel casters make it highly maneuverable

ASCOT NO. MFG. NO. DESCRIPTION

TW2000 Tweel Handler™ 407-02000 TW2000



HEAVY DUTY TIRE DOLLY

BJ-T300A

407-03000

• Reduce back injuries • Perfect stud alignment • Perfect for 8 to 10-hole Budd-type wheels

• Removes truck wheels and tires fast and easy • Increases productivity • Reduces manpower needs • Saves time and money, maintenance free • Works with tires 23.5" to 43.5'

Heavy Duty Tire Dolly

ASCOT NO. MFG. NO. DESCRIPTION

PARTS AND ACCESSORIES FOR HEAVY DUTY TIRE DOLLY 104 407-10400 Roller Set 407-11600 116 Pin Lock





SAFER-GO TRUCK TIRE DOLLY

• This convenient dolly makes manually lifting wheel sets completely unnecessary • Simply slide the rollers underneath the tire and use the jack handle to raise it to the desired height • Use the included Gaither O-LINE-ER® to perfectly position the wheel for easy installation • Equipped with a collapsible handle frame making it easy to store and ideal for mobile service • LIFTING CAPACITY: 350 lbs.

ASCOT NO. MFG. NO. DESCRIPTION

407-47110 G471106 Safer-Go Truck Tire Dolly

WINNTEC TIRE DOLLY

• 500 lb. capacity allows for use on all commercial truck tire sizes • Longer rollers (2 1/2" longer) makes it even easier to handle super single sizes • Wheel position allows tech to lift tire/wheel assembly by pushing down, instead of lifting up

· O-LINE-ER and Bracket included with new production models (O-LINE-ER used for lining up stud holes with studs)

ASCOT NO. MFG. NO. **DESCRIPTION** 407-47105 G471105HD Winntec Tire Dolly

O-LINE-ER STUD ALIGNMENT TOOL

ASCOT NO. MFG. NO. DESCRIPTION

GTO-01TB O-LINE-ER Stud Alignment Tool 491-00101





407-02000

407-47105

Wheel Dollies (cont.)

OMEGA!!!!

2,000 LB. HEAVY DUTY 3-IN-1 CAR DOLLY SET

- HOLDS VEHICLE: By the wheel, by the pinch weld and by the frame • No adapters required • Integrated frame adapters
- Locking casters No tools required Adapter secured with pins
- Self-stacking Allows convenient storage Sold in pairs of two



3/4-TON WHEEL DOLLY

- Hydraulic system actuated to provide smooth, positive power for the removal and installation of single, tandem, and duplex tires and wheels
- Load restraining chain for security













ASCOT NO.	MFG. NO.	DESCRIPTION
407-47020	47020	2,000 LB Heavy Duty 3-IN-1 Car Dolly Se



	NO.	, , ,	LIFT RANGE	RANGE	SIZE	(W X D X H)	(LB.)
407-47053	47053	3/4	2-1/4" - 11"	(-)2 - 5°	25-7/8" x 25-1/4"	43-1/2" x 43" x 34-7/8"	151



WHEEL DOLLY FOR AGRICULTURAL AND **EARTH MOVING MACHINERY**

• Easy and safe mounting, demounting and handling of large wheels on agricultural and earth moving machinery • Capable of handling large wheels from 45.3" up to 84.7" in diameter and up to 41.3" in depth • CAPACITY: 3,306 lbs • Double acting hydraulic system • Handsfree switch between lifting and lowering action • Safe and controlled lowering • 2 x 4 large rollers improve handling of tires with deep treads • Top-point wheel connection rod keeps the wheel in safe balance



300 LB. CAPACITY SINGLE TIRE LIFTER

- To safely assist a technician with the removal and installation of single wheels on vehicles that are supported on a lift • Maneuverability is made easy by means of four swivel caster wheels • Two rear caster wheels include a locking mechanism which can prevent the dolly from moving
- Unique offset design offers open access from the rear to mount wheel to the vehicle • Onboard rollers make for easy stud-to-hole alignment • Air-operated controls allows the unit to lift the load effortlessly • 4" low height of support legs





The Wheel Dolly for Agricultural and Earth Moving Machinery makes possible easy and safe mounting, demounting and handling of large wheels.





▲WARNING: For more information go to www.P65Warnings.ca.gov.



ASCOT NO.	MFG. NO.	CAP. (LB.)				LENGTH	WT. (LB.)
407-82306	82306	300	35-1/8"	4" / 39-1/8"	9" - 22"	17-1/2" - 33-1/4"	200

ASCOT NO. 407-90538

MFG. NO.

DESCRIPTION

90538


Wheel Dolly for Agricultural and Earth Moving Machinery



Vehicle Stands & Accessories











ASCOT NO.	MFG. NO.	CAP. (TONS)	MIN. HGT. / MAX. HGT.	BASE SIZE	SADDLE SIZE	WT. (LB.)
302-31500	31500	3/4	55" / 80"	12" Diameter	5-1/4" x 1-1/2"	33
302-31501	31501	3/4	55" / 80"	12" Diameter	5-1/4" x 1-1/2"	39
302-33020	33020	2	67" / 76-3/4"	23" x 18"	5-1/4" x 1-1/2"	53

HYDRAULIC JACK OIL

· Formulated with oxidation stable base oils, rust inhibitors, antiwear agents & antifoam agents to provide protection for hydraulic jacks and lifting equipment • 32 oz. bottle • 6 bottles per case



309-00925

ASCOT NO. 309-00925

MFG. NO. MAG-925 DESCRIPTION Hydraulic Jack Oil (6 per Case)



20 & 50-TON CAPACITY TRAILER STABILIZING STANDS

• NEW! Now comes with wheels that allow for easier positioning under the load • Meets OSHA requirements for supporting trailers when loaded or unloaded • 14" diameter base provides maximum leveling stability • Quick adjust spin handle for ease of turning • Large diamond plate saddle to grip the load



ASCOT NO.	MFG. NO.	DESC.		MIN. HGT. / MAX. HGT.	BASE SIZE	SADDLE SIZE	WT. (LB.)
302-81022	81022A	US	20	39" / 50-5/8"	14" Diameter	4-1/2" x 5"	52
302-81122	81022Ai	Import	20	39" / 50-5/8"	14" Diameter	4-1/2" x 5"	52
302-81050	81050	-	50	39" / 51"	14" Diameter	8" Dia.	152

3/4 & 1-1/2-TON UNDER TRAILER HOIST STANDS

• Lightweight, slender design • Quick adjust spin handle with thrust bearing eliminates wear and provides ease of turning load • Foot pedal (81034A only) generates 1" additional stroke and 400 lb. of force at

the saddle • Pedal may be locked in vertical position for storage or shipment 1-1/4" diameter acme threaded screw has 26-1/4" travel



02-81034	302-810

ASCOT NO.	MFG. NO.	CAP. (TONS)	MIN. HGT. / MAX. HGT.	BASE SIZE	SADDLE SIZE	WT. (LB.)
302-81033	81033A	3/4	55-1/4" / 81-1/2"	12" Diameter	1-5/8" x 5-1/4"	35
302-81034	81034A	3/4	55-1/4" / 81-1/2"	12" Diameter	1-5/8" x 5-1/4"	39
302-81035	81035A	1-1/2	48-7/8" / 85-3/8"	12" Diameter	3-1/4" x 3-1/4"	39.5

HYDRAULIC JACK OIL

ASCOT NO.	MFG. NO.	DESCRIPTION
309-93291	HW93291	1 Quart
309-93294	HW93294	1 Gallon







Hydraulic Shop Presses



50 AND 100-TON CAPACITY HYDRAULIC SHOP PRESSES

- · For heavy duty use in truck garages and industrial work shops
- · Manually operated two speed pump provides quick ram travel to load
- · Hand operated winch raises and lowers press bed
- · Welded frames for strength and no assembly required
- Self-retracting ram is bearing mounted for lateral movement on head channel
- · Delivered Fully Assembled
- ASSEMBLED IN THE USA
- 78057A features air/hydraulic foot pump and 10' hose
- · 78058A and 78110B feature electro/hydraulic pump







							RED			
	MFG.	OPERATING	CAP.	RAM	MIN. HGT. /	THROAT	HEIGHT	BETWEEN	BETWEEN	WT.
ASCOT NO.	NO.	SYSTEM	(TONS)	TRAVEL	MAX. HGT.	WIDTH	ADJ.	UPRIGHTS	BED RAILS	(LB.)
317-78055	78055A	Manual	50	6-1/4"	7-1/2"/ 32-5/8"	34-1/2"	7 x 5"	5-5/8"	7-3/8"	804
317-78057	78057A	Air/ Hydraulic	50	6-1/4"	7-1/2" / 32-5/8"	34-1/2"	7 x 5"	5-5/8"	7-3/8"	801
317-78058	78058A	Electro/ Hydraulic	50	6-1/4"	7-1/2" / 32-5/8"	34-1/2"	7 x 5"	5-5/8"	7-3/8"	814
317-78077	78077	Air/ Hydraulic	50	13-1/4"	7-1/2" / 32-5/8"	34-1/2"	7 x 5"	5-5/8"	7-3/8"	833
317-78078	78078	Electro/ Hydraulic	50	13-1/4"	7-1/2" / 32-5/8"	34-1/2"	7 x 5"	5-5/8"	7-3/8"	846
317-78110	78110B	Electro/ Hydraulic	100	10-1/4"	18-1/4" / 45-3/4"	40-1/4"	8 x 4-1/2"	5-5/8"	9"	1,777

▲WARNING: For more information go to www.P65Warnings.ca.gov.

ARBOR PLATES (FOR USE WITH NORCO 12 AND 20-TON SHOP PRESSES)

• For use with Norco 12 and 20-ton shop presses only • 1" x 4" x 10" long steel plates with "V" cutout on one edge and circle cutout on the other



317-78000

ASCOT NO. 317-78000

MFG. NO. 78000

DESCRIPTION

12 and 20-ton capacity pair of Arbor Plates. WEIGHT: 20 lb.

HYDRAULIC GAUGE WITH FITTING

• For use with Norco 12 and 20-ton capacity shop presses only • 4" diameter face • Dial indicates internal pressure (PSI) and 317-78021 corresponding pounds of force at ram end • Accurate within 2-1/2% · 1/4" NPT fitting

ASCOT NO. 317-78021

MFG. NO. 78021

DESCRIPTION

Hydraulic Gauge with Fitting. WEIGHT: 2 lb.

ARBOR PLATES (FOR USE WITH NORCO 50 AND 100-TON SHOP PRESSES)

• For use with Norco 50 and 100ton shop presses only

ASCOT NO.	MFG. NO.	DESCRIPTION
317-78056	78056A	50-ton capacity pair of Arbor Plates. WEIGHT: 108 lb.
317-78111	78111A	100-ton capacity pair of Arbor Plates. WEIGHT: 153 lb.





Hydraulic Shop Presses (cont.)

25-TON CAPACITY HYDRAULIC SHOP PRESS

- Excellent for bending, bonding or straightening applications
- Multi-position bed for work height adjustment
- Heavy steel welded construction
- Includes hand winch for easy bed adjustments
- Ideal for the removal or installation of gears, universal joints, pulleys, wrist pins, and other press jobs
- 4" pressure gauge

55-TON CAPACITY HYDRAULIC SHOP PRESS

- Excellent for bending, bonding or straightening applications; Ideal for the removal or installation of gears, universal joints pulleys, wrist pins, and other press jobs
- Heavy steel welded construction
- Pressure relief valve for overload protection
- Dual stage release control valve
- Multi-position bed for work height adjustment

100-TON CAPACITY HYDRAULIC SHOP PRESS

- Excellent for bending, bonding or straightening applications
- 100-Ton Capacity
- Heavy steel welded construction
- Includes hand wench for easy bed adjustments
- 1 HP / 2-gallon electric pump
- Quiet operation meets OSHA regulations
- Industrial hard chromeplated ram helps prevent rust and corrosion
- Ideal for the removal or installation of gears, universal joints, pulleys, wrist pins, and other press jobs



SHOP PRESS SPECIFICATIONS

ASCOT NO.	MFG. NO.	DESCRIPTION	CAPACITY (TONS)	STROKE	INTERIOR WIDTH	TYPE OF PUMP	WORKING HEIGHT	BED POSITIONS	SHIPPING WEIGHT (LB.)
317-93300	HW93300	25-Ton Shop Press with Manual Hand Pump	25	6"	30"	Hand Pump	6-1/2" - 49-1/2"	8	484
317-93400	HW93400	55-Ton Shop Press with Manual Pump	55	6"	35-1/2"	Air Pump	7-1/2" - 55-1/2"	9	855
317-93610	HW93610	100-Ton Shop Press with Electric Pump	100	10"	35-3/8"	Electric Pump	12-1/4" - 52-1/2"	6	1221



Shop Cranes

2-TON FNGINF CRANE

- · Heavy duty welded construction with rugged reinforced tubular steel
- Metered control release valve for lowering boom at a precisely-controlled rate of speed
- Special 8 Ton hydraulic long rams are equipped with a patented built-in by-pass mechanism



2-TON ENGINE CRANE

- Folds for easy storage
- Mobility handle for easy movement
- 3 Boom extension positions
- · Swivel handle hook
- · Manual hand pump for load lifting and control
- · ADJUSTS FOR WIDE CLEARANCE: One front wheel caster aids in movement







ASCOT NO.	MFG. NO.	CAP. (TONS)	BOOM MIN.	BOOM MAX.	LEG EXTENSION	SIZE	WEIGHT (LB.)
331-44020	44020	2	5"	86-1/2"	90-3/4"	31-1/2" x 61-3/4"	266
331-93809	HW93809	2	5"	130"	55"	28" x 75"	616
331-93806	HW93806	3	6-1/2"	144-1/2"	91-1/4"	75" x 51"	1110

▲WARNING: For more information go to www.P65Warnings.ca.gov.



Shop Cranes (cont.)



1/2, 2 AND 3-TON CAPACITY SHOP CRANES

• Designed to raise, lower and transport engines, transmissions, differentials and other heavy loads with minimal effort • Four adjustable legs provide greater stability • 1/2 and 2-ton are boom retracted • 3-ton available in either air/hydraulic or electro/hydraulic • ASSEMBLED IN THE USA

ASCOT NO.	MFG. NO.	OPERATING SYSTEM	BOOM CAP. @ LENGTH	BOOM MIN.	BOOM MAX.	LEG EXTENSION	OVERALL SIZE (W X L X H)	WEIGHT (LB.)
331-78106	78106A	Manual	2-Ton @ 44-3/4"	0"	88"	83-1/2"	74-1/2" X 51-3/4" X 70-3/4"	320
331-78600	78600B	Air/ Hydraulic	3-Ton @ 65"	13"	149-1/2"	49", 65", 81"	75" X 51" X 90-1/2"	1,150
331-78605	78605A	Electro/ Hydraulic	2-1/2-Ton @ 81"	13"	149-1/2"	49", 65", 81"	75" X 51" X 90-1/2"	1,182



BRAKE DRUM HANDLER

• Handles 15" and 16-1/2" drums • • Ball bearing wheels, semi-pneumatic tires and 3/4" diameter axle provide easy maneuverability and balance

ASCOT NO.	MFG. NO.	2011 2	HIGH LIFT HEIGHT	OVERALL SIZE	WHEEL DIAMETER	WT. (LB.)
407-72040	72040B	10-1/4"	15-1/4"	21" / 62-1/2"	8"	64



BRAKE DRUM HANDLER

• Ideal for removing and installing truck brake drums • Works with 15" and 16-1/2" drums • Includes detachable handle for convenient storage

ASCOT NO.	MFG. NO.	DESCRIPTION
407-46000	46000	Brake Drum Handler

BACK BUDDY II

• The Back Buddy II™ rolls under and bolts onto heavy drum and hub assembly, then handily rolls the assembly out and lays it over for servicing • Re-assembly is quick and precise because the Back Buddy II™ angles for perfect hub alignment, eliminating seal damage and costly fixes • The Back Buddy II™ handles all hub and drum assemblies with Universal Receiver and Adapter Sets • Adapters 6069 and 6073 10-hole inboard and outboard application are included • Other wheel adapters sold separately

ASCOT NO.	MFG. NO.	DESCRIPTION
407-00350	350B	Back Buddy II



Tire Lubricants & Sealants

Markers

Tire Branding Inserts

Bead Breakers

Hydraulic Pumps & Rams

OTR Service Tools

Cribbing Sets & Wheel Chocks

Bead Seating Devices

Chloride Pumps

Mount/Demount Tools

Hammers & Wedges

Wrenches & Lug Wrenches

Shop Service Tools

Tire Inflation Systems

Safety Inflation Cages

SERVICE





SINCE

ESCO has been the world leader in manufacturing and supplying quality tire service equipment for the automotive, agricultural, commercial truck, off-the-road (OTR), and mining markets.

1/2 Gallon Air Hydraulic Pump

model 10518

- Equipped with an air exhaust muffler for quiet pumping of the air motor.
- Air and oil inlet filters for reducing the risk of contamination.
- Durable, lightweight design great for service trucks, shop environments, or out in the field.
- Internal pressure relief valve system (load limit device) for overload protection.
- Engineered with a durable lightweight and corrosive resistant plastic components.
 - increasing the life of the air motor and hydraulic pump.



>>>>

SUPERSONIC SPEED

Quick hydraulic pressure recovery reduces wait time for pressure release from tool(s).



>>>>

AVAILABLE KIT (10518C) Available in kit form with

8ft. hydraulic hose with couplers, and safety air pressure reducer.



>>>> MOUNTABLE FEET

Designed with mountable feet for service trucks, shops, presses or other hydraulic applications.



GIANT TIRE BEAD BREAKER > 10-TON STAK-ABLE RAM > DUAL AG. BEAD BREAKER



MODEL 10144K GIANT TIRE BEAD BREAKER KIT

Speciality Bead Breaker for Rimex OE wheels commonly found on Komatsu, Liebherr, Le Tourneau, and Terex vehicles Designed to prevent the tool from kicking out while under load. 25 Ton Capacity Cylinder. > 10 inch Strake. > Includes 2 universal jaws and adapters for Rimex DGS and Titan SVM/OVM.

MODEL 10316 10 TON STAK-ABLE RAM KIT

Great for use in multiple applications in the tire/wheel service market. > Ideal for low clearance applications. > Easy snap-in extensions. Made of high-quality steel. Most versatile 10
Ton Ram on the market. Easy to switch out extensions length. Includes Carrying Case.

MODEL 10165 DUAL AGRICULTURAL BEAD BREAKER

Used on dual-agricultural tires to break inside bead on outside tires, eliminating the need to remove from tractor. > Removable handle for easier positioning. Lightweight and easy to use.

Break inner bead with as little as 4 1/2 inches of operating space. > 10,000 lbs of hydraulic pushing force

The Proper Tools to Keep Your Equipment Moving...



Moore-Safe 20-Ton Bottle Jack GT-20MS Next Generation Bead Bazookas® - BB-3L2, BB-6L2, BB-10L2





G12941R G12942R



Bead Bazooka Repair Kit - BBVRK





Copyright © 2021 Gaither Tool Co. All rights reserved.

COVERED BY ONE OR MORE U.S. PATENTS, INCLUDING: PAT. 10,800,216 PAT. 10,800,215 PAT. 10,759,238 PAT. 10,266,019 PAT. 8,752,604 PAT. 9,033,306 PAT. 9,822,893 PAT. 9,649,897 U.S. PAT. 10,214,399

GAITHER TOOL CO.





STOPS BONDING OF TIRE BEADS

Tire Lubricants & Sealants

ASCOT TIRE AND TUBE MOUNTING COMPOUND

- Versatile formula-dilutes to any strength your job requires • Approved by major tire companies world-wide
- Made from natural, renewable resources • Totally safe for all tires • Economical when diluted
- Ultra-thick concentrate for excellent performance when packing beads

432-02029



ASCOT NO.	MFG. NO.	DESCRIPTION
432-02012	2012	Tire/Tube Mounting Compound, 125 lb. Drum
432-02014	2014	Tire/Tube Mounting Compound, 445 lb. Drum
432-02028	2028	Tire/Tube Mounting Compound, 8 lb. Pail (4 per Case)
432-02029	2029	Tire/Tube Mounting Compound, 25 lb. Pail
432-02035	2035	Tire/Tube Mounting Compound, 40 lb. Pail

BLACK RIM RUST RETARDANT & TIRE LUBE

- Makes tire mounting and dismounting faster and easier Now with rust inhibitor Approved by major rubber companies
- Lubricates all rubber parts, stops rubber squeaks



ASCOT NO.	MFG. NO.	DESCRIPTION
435-06001	065-2539	Black Rim Rust Retardant Tire Lube, 6 - 5 lb.
435-06008	048-2539	Black Rim Rust Retardant Tire Lube, 4 - 8 lb.
435-06002	025-2539	Black Rim Rust Retardant Tire Lube, 25 lb.
435-06003	040-2539	Black Rim Rust Retardant Tire Lube, 40 lb.
435-06004	120-2539	Black Rim Rust Retardant Tire Lube, 120 lb.
435-07001	041-2541	Tire Mounting & Rubber Lubricant, 4 Gal.
435-07002	005-2541	Tire Mounting & Rubber Lubricant, 5 Gal.
435-08001	025-2540	Tire Mounting & Rubber Lubricant Paste, 25 lb.
435-08002	048-2540	Tire Mounting & Rubber Lubricant Paste, 8 lb.
435-08003	040-2540	Tire Mounting & Rubber Lubricant Paste, 40 lb.

ASCOT BLACK TIRE LUBRICANT

• Stops the bonding or "freezing" of tire beads to tire rims which allows for easy, damage free removal of tires • Will not swell or affect rubber, especially inner tubes



AS	SCOT NO.	MFG. NO.	DESCRIPTION
43	5-02785	2785	Ascot Black Tire Lubricant, 8 lb. Pail (4 per Case)
43	35-02786	2786	Ascot Black Tire Lubricant 25 lb Pail



437-00001 TS-1 Tire Swab - 11" OAL X 2" Diameter	
437-00002 TS-2 Tire Swab - 15" OAL X 2" Diameter	
437-00003 TS-3 Tire Swab - 18" OAL X 3" Diameter	
437-40006 40006 Tire Lubricating Brush	
437-13014 313014 Hunter-Style Tire Lubricating Brush	





MURPHY'S CONCENTRATED TIRE & TUBE MOUNTING COMPOUND

• Versatile formula-dilutes to any strength your job requires • Approved by major tire companies world-wide • Made from natural, renewable resources • Totally safe for all tires • Economical when diluted • Ultrathick concentrate for excellent performance when packing beads



ASCOT NO.	MFG. NO.	DESCRIPTION
432-02000	2000	Murphy's Concentrated Tire & Tube Mounting Compound, 8 lb. Pail (4 per Case)
432-02005	2005	Murphy's Concentrated Tire & Tube Mounting Compound, 25 lb. Pail
432-02008	2008	Murphy's Concentrated Tire & Tube Mounting Compound, 40 lb. Pail
432-02014	2014	Murphy's Concentrated Tire & Tube Mounting Compound, 445 lb. Drum

MURPHY'S WHITE TIRE MOUNTING PASTE

• Designed for alloy wheels, low profile and run flat tires • Extra Slippery to help mount tires with stiff beads • No water, no mixing. Use right from the container • Contains rust inhibitor to help fight rim rust



ASCOT NO.	MFG. NO.	DESCRIPTION	
432-02146	2146	8 lb. Pail	
432-02167	2167	8 lb. Pail (Low Profile)	

MURPHY'S NON-RUST RIM-KOTE

• Acts as tire mounting lubricant - prevents tire bead "freezing" • Contains no petroleum - prevents rim rust and scale • Great for seating tubeless bias, belted and radial tires • APPLICATIONS: Recommended for mounting tires on heavy duty trucks, buses and off-the-road vehicles



ASCOT NO.	MFG. NO.	DESCRIPTION
434-02110	2110	Non-Rust Rim-Kote, 30 lb. Pail
434-02120	2120	Non-Rust Rim-Kote, 40 lb. Pail

NO RIM RUST

• Protects tires. Tire bead won't fuse to rim • Helps prevent corrosion on rims and rigs • Helps you comply with OSHA Regulation 3086



435-00125

ASCOT NO.	MFG. NO.	DESCRIPTION	
435-00015	FL4-1	No Rim Rust, 4-1/2 lb. Pail	
435-00125	FL25-1	No Rim Rust, 25 lb. Pail	
435-01120	FL120-1	No Rim Rust, 120 lb. Drum	



Tire Lubricants & Sealants (cont.)





MURPHY'S LIQUID LUBRICANT

- Designed to assist in mounting rubber tires and tubes on all types of wheels • Ready to use liquid for easy application • Easy clean up and non-toxic
- · Contains rush inhibitor to help fight rust





ASCOT NO.	MFG. NO.	DESCRIPTION
433-02020	2020	Murphy's Liquid Lubricant, 1 Gallon (4 per Case)
433-02023	2023	Murphy's Liquid Lubricant, 5 Gallons
433-02022	2022	Murphy's Liquid Lubricant, 55 Gallons



433-02020

MURPHY'S CONCENTRATED EXTRA SLIPPERY LIQUID LUBRICANT

• Contains improved super lubricity polymers • Rust inhibitor added to help fight rim rust • ECONOMICAL: Dilutes 2 to 1

• Formulated for super-fast mount of passenger tires





ASCOT NO.	MFG. NO.	DESCRIPTION
433-01950	1950	Murphy's Concentrated Extra Slippery Liquid Lubricant, 1 Gallon (4 per Case)
433-01957	1957	Murphy's Concentrated Extra Slippery Liquid Lubricant, 5 Gallons
433-01958	1958	Murphy's Concentrated Extra Slippery Liquid Lubricant, 55 Gallons



433-01950

UNIVERSAL MOUNTING PASTE

- Makes mounting and demounting tires easier and faster and helps alleviate stress on and damage to the bead area of tires
- Tire mounting paste applies with a sponge and will not corrode or discolor aluminum or alloy wheels, won't freeze or harden
- Rubber Lubricant is a liquid concentrate that makes one gallon of rust-inhibiting water-based mounting lubricant



432-00740	432-00750	432-01750
132 007 10	132 00730	132 01730

ASCOT NO.	MFG. NO.	DESCRIPTION	QTY./ BOX
432-00730	73	Mounting Paste Brush for Car/Light Truck	1
432-00731	73T	Mounting Paste Brush for Trucks	1
432-00740	74	Universal Mounting Paste, 22 lb.	1
432-00750	75	High Profile Universal Mounting Paste, 7.7 lb.	1
432-01750	75N	Low Profile Universal Mounting Paste, 7.7 lb.	1
432-00751	75B	Bracket For Mounting Paste	1
437-00001	TS-1	Swab - 11" OAL x 2" Diameter	1
437-00002	TS-2	Swab - 15" OAL x 2" Diameter	1
437-00003	TS-3	Swab - 18" OAL x 3" Diameter	2

OTR MOUNTING/ PACKING COMPOUND

• Extra thick for Superior Bead Packing on OTR tires • Makes OTR Tire Mounting Faster and Easier • Will not separate or liquefy



432-12490

ASCOT NO.	MFG. NO.	DESCRIPTION
432-12490	2490	OTR Mounting/Packing Compound, 25 lb.
432-12492	2492	OTR Mounting/Packing Compound, 40 lb.





TIRE MOUNTING COMPOUNDS

- Excellent Lubrication Will not separate or liquefy • Superior for tire bead packing
- Concentrated; water soluble, can be diluted





432-12180

432-12280

	ASCOT NO.	MFG. NO.	DESCRIPTION
4	432-12178	2178	Tire Mounting Compound (Honey Color), 8 lb. (4 per Case)
_	432-12180	2180X	Tire Mounting Compound (Honey Color), 25 lb.
-	432-12183	2183	Tire Mounting Compound (Honey Color), 40 lb.
7	432-12012	2012	Tire Mounting Compound (Honey Color), 125 lb.
-	432-12014	2014	Tire Mounting Compound (Honey Color), 55 Gal.
-	432-12278	2278	Tire Mounting Compound (Brown Color), 8 lb. (4 per Case)
-	432-12280	2280	Tire Mounting Compound (Brown Color), 25 lb.
-	432-12282	2282	Tire Mounting Compound (Brown Color), 40 lb.
-	432-12214	2214	Tire Mounting Compound (Brown Color), 55 Gal.

BEAD BUTTER BLUE TIRE MOUNTING LIQUID LUBE

• Excellent Lubrication • No Residue • Concentrated; water soluble, can be diluted





433-02054

433-02053

	ASCOT NO.	MFG. NO.	DESCRIPTION
	433-02053	2053B	Bead Butter Blue Tire Mounting Liquid Lube, 1 Gal. (4 per Case)
	433-02054	2054B	Bead Butter Blue Tire Mounting Liquid Lube, 5 Gal.
	433-02055	2055B	Bead Butter Blue Tire Mounting Liquid Lube, 55 Gal.

LIQUID LUBE BLUE TIRE MOUNTING LIQUID

• Excellent Lubrication • Superior "Tack" and Bead Sealing qualities • Reduces tire/ rim slippage • Concentrated; water soluble, can be diluted • Near neutral pH factor





ASCOT NO.	MFG. NO.	DESCRIPTION
433-81505	81505	Liquid Lube Blue Tire Mounting Liquid, 2 Gal. (5 Gal. Mixing Pail)
433-81511	81511	Liquid Lube Blue Tire Mounting Liquid, 1 Gal. (4 per Case)
433-81515	81515	Liquid Lube Blue Tire Mounting Liquid, 5 Gal.
433-81555	81555	Liquid Lube Blue Tire Mounting Liquid, 55 Gal.

BLACK-ICE STOP RUST RIM RELEASE

• Lubricates rim and tire for easy mounting & demounting • Protects against rust & corrosion • Prevents rim and bead from bonding





435-02480

ASCOT NO.	MFG. NO.	DESCRIPTION
435-02480	2480	Black-Ice Stop Rust Rim Release, 25 lb. Pail



TIRE & WHEEL SERVICE

TIRE & WHEEL SERVICE

Tire Lubricants & Sealants (cont.)

SURE SHOT PRESSURE SPRAYERS

- Air pressurized and refillable
- Environmentally safe, eliminates aerosol usage • For brake and parts cleaner, penetrating oils, lubricants, degreasers, solvents • MADE IN USA



632-	·UIC	102

ASCOT NO.	MFG. NO.	DESCRIPTION
632-00005	K-5	Partial Repair Kit for Model A Sure Shot Sprayers
632-00010	K-10	Complete Repair Kit for Model A Sure Shot Sprayers
632-01002	A1002	Sure Shot Black Enameled Steel Sprayer w/ Adjustable Nozzle
632-10001	A1000R	Sure Shot Enameled Steel Sprayer - Red

ANODIZED ALUMINUM SPRAYER

- Adjustable pistol-grip nozzle
 Features a chemical resistant anodized finish
- Will work with water, solvent & oil-based materials
- Replaces Model "A" plated brass sprayers 24 oz. capacity
- MAX PRESSURE: 200 PSI
- MADE IN USA



ASCOT NO. MFG. NO. DESCRIPTION
632-02400 M2400S Anodized Aluminum
Sprayer

INDUSTRIAL SPRAY BOTTLE

- Industrial sprayer for use with light oils, solvents, and detergents
- The durable polyethylene bottle is impervious to high and low temperatures
- The trigger mechanism is resistant to damage caused by caustic materials

ASCOT NO.	MFG. NO.	DESCRIPTION
632-00922	TS-922	16 Oz. Spray Bottle
632-00923	3210B32	32 Oz. Spray Bottle





EZ CHECK LEAK DETECTOR

- Finds leaks in all tires
- Environmentally friendly
- Excellent foam formation
- Skin friendly
- Commercial use only



433-25430

ASCOT NO.	MFG. NO.	DESCRIPTION
433-25430	2543	Ascot EZ Check Leak Detector, Quart (12 per case)
433-25431	2543-1G	Ascot EZ Check Leak Detector, Gallon (4 per case)





B'LASTER PENETRANT W/ PROSTRAW

- #1 selling penetrant
- Breaks free rusted or frozen parts
- Protects against further rust and corrosion
- Use on automotive, industrial, marine. plumbing and other equipment
- New ProStraw[™] with Control Flow Technology[™]
- Quantity: 12 cans per case



ASCOT NO.

408-00116

MFG. NO.

DESCRIPTION

16-PB-DS B'laster Penetrant w/ ProStraw,

11 oz. can (12 per case)

B'LASTER 26PB PENETRANT

- #1-selling penetrant Breaks free rusted or frozen parts • Protects against further rust and corrosion
- Use on automotive, industrial, marine, plumbing & other equipment • QUANTITY: 6 per case



ASCOT NO.

MFG. NO. DESCRIPTION

408-00026 26PB

B'laster 26PB Penetrant,

18 oz. (6 per Case)

B'LASTER NON-CHLORINATED BRAKE CLEANER

- Removes brake fluid, oil, grease & contaminants
- Non-chlorinated Fast, evaporating formula
- Stops brake squeal QUANTITY: 6 per case



ASCOT NO.

MFG. NO.

DESCRIPTION

417-00020

20BC

B'laster Non-Chlorinated Brake Cleaner, 14 oz. (6 per Case)




408-00026

408-00116

417-00020

LIQUITUBE





ASCOT NO.	MFG. NO.	DESCRIPTION
451-00640	1220-0640	LiquiTube 5-Gallon Pail
451-20516	1220-516	LiquiTube 5-Gallon Injector Pump

PENETRANTS/AIR LEAK DETECTOR



328-05003



433-35805

ASCOT NO.	MFG. NO.	DESCRIPTION
328-05003	001-1071P	Ultra Pen Lube 2000 Penetrant Lubricant, 1 Gal.
328-05005	005-1071P	Ultra Pen Lube 2000 Penetrant Lubricant, 5 Gal.
433-35805	35805	Detecto Mist Air Leak Locator, 1 Qt.





Tire Lubricants & Sealants (cont.)

STS TIRE SEALANTS

• Seals 2x more punctures than the competition • Permanently seals punctures up to 1/4" • Prevents wheel corrosion, glycol free • Non-toxic, non-flammable, noncombustible • 100% bio-degradable and water soluble • Lasts for the lifetime of the tire • Wide range of applications • Low freeze point, freeze/thaw stable



ASCOT NO.	MFG. NO.	DESCRIPTION
STS TIRE SEALANT		
451-04128	STSCS4128	4 (1) Gallon Per Case
451-00640	STS640	5-Gallon Pail
451-00006	STS6G	6-Gallon Pail
451-00055	STS55G	55-Gallon Drum
451-00275	STS275T	275-Gallon Tote
	STS CONCENT	RATE TIRE SEALANT
451-14128	STSCONCS4128	4 (1) Gallon Per Case
451-01640	STSCON640	5-Gallon Pail
451-00026	STSCON6G	6-Gallon Pail
STS OTR TIRE SEALANT		
451-24128	STSOTRCS4128	4 (1) Gallon Per Case
451-02640	STSOTR640	5-Gallon Pail
451-00036	STSOTR6G	6-Gallon Pail
451-00255	STSOTR55G	55-Gallon Drum

STS TOOLS AND ACCESSORIES

ASCOT NO.	MFG. NO.	DESCRIPTION
451-00101	ST-XM-1	1 Gal. Hand Pump
451-00440	ST-XM-44	5 Gal. Hand Pump
451-00551	STXM55	55 Gal. Transfer Pump
451-00707	ST-TTS-WW	STS Display Stand
469-02311	VCR-A	Auto Valve Core Tool
469-02312	VCR-F	Farm Valve Core Tool

ECO SEAL

• 7x corrosion resistance • Maintains non-acidic pH levels, even in high temperatures • Permanently seals punctures up to 1/4" • Glycol-free; prevents wheel corrosion • Environmentally friendly formula, uses recycled rubber and 100% biodegradable ingredients • Non-toxic, non-flammable, non-combustible • Low freeze point (-10°F)

ASCOT NO.	MFG. NO.	DESCRIPTION
451-05510	ST-XM55	5 Gal. EcoSeal Hand Pump
504-00005	ECO5G	5 Gal. Pail
504-00055	ECO55G	55 Gal. Drum
504-00275	EC0275G	275 Gal. Tote
504-02424	ECOCS2424	24 oz. Bags
504-01832	ECOCS1832	32 oz. Bags
504-01248	ECOCS1248	48 oz. Bags



<u>MARKAL</u>

Markers

PAINTSTIK® MARKERS

· Real paint in stick form · Ideal for coding tire casings • Marks are long lasting, water resistant and weather resistant • Marks will withstand vulcanizing and recap temperatures

• Non-toxic, contains no lead • Marking range -50°F to 150°F (-46°C to 66°C) • INCLUDES: 12 sticks per box, 12 boxes per case



ASCOT NO.	COLOR
459-80220	White (Markal B)
459-80221	Yellow (Markal B)
459-80222	Red
459-80223	Black
459-80225	Blue

ASCOT NO.	COLOR
459-80226	Green
459-80227	Pink
459-80228	Purple
459-80229	Brown
459-80230	Gray
459-80231	Gold

ASC	OT NO.	COLOR
459	-80232	Aluminum
459	-80257	White
459	-80258	Yellow
459	-80271	Orange

FASIIY

MARKS ON

NET OR COLD

MARKAL TYRE MARQUE

· Ideal for temporary marking of tires • Marks easily on wet or cold surfaces • Lead-free, zincfree marks can be painted over • SIZE: 1/2" X 4-5/8" • MARKING RANGE: -20°F to 130°F (-29°C to 24°C) • INCLUDES: 12 sticks per box, 12 boxes per case

ASCOT NO.	MFG. NO.	COLOR
459-54220	51420	White
459-54222	51421	Yellow

The White Markal Crayon in use.



459-54222

B° HEX WHITE TIRE **PAINTSTIK**

· Ideal for temporary marking of tires • Marks easily on wet or cold surfaces • INCLUDES: 12 sticks per box, 12 boxes per case

ASCOT NO.	MFG. NO.	DESCRIPTION
459-80250	80250	B® Hex White Tire Paintstik

EASILY MARKS ON WET OR COLD 459-80250

PAINTSTIK® MARKER HOLDER



459-85100

ASCOT NO.	MFG. NO.	DESCRIPTION
459-85100	85100	6" Push-Button Metal Holder for B-Paintstik

QUIK STIK® MINI

• Fast-drying, vibrant paint marks dry in 5 to 7 minutes • Compact plastic holder with clip cap stores easily in pocket and keeps hands and clothing clean • Marks on virtually any surface; wet, smooth, rough, or hot • Weather- and UV-resistant paint for long-lasting marks • Solid paint marker advances and retracts by turning twist-up knob • Xylene and 2-Butoxyethanol free formula to reduce health risks • MARKING RANGE: 0°F to 392°F (-18°C to 200°C)



ASCOT NO.	MFG. NO.	DESCRIPTION	QTY./BOX
459-61126	61126	Mini Quik Stik® Marker (White)	12
459-61127	61127	Mini Quik Stik® Marker (Yellow)	12
459-61128	61128	Mini Quik Stik® Marker (Red)	12
459-61129	61129	Mini Quik Stik® Marker (Black)	12

E-Z BREAK® ANTI-SEIZE COMPOUND-COPPER GRADE

• Copper-based anti-seize and lubricating compound • Prevents seizing of aluminum wheels to steel brake drums or rotors • Will not wash off in rain or snow • Other applications include head bolts, exhaust manifolds and muffler connections, brackets and engine bolts • Withstands temperatures to 1800°F (982°C)

ASCOT NO.	MFG. NO.	DESCRIPTION
494-01010	08910	10 Oz. Can With Brush in Cap
494-08907	08907	16 Oz. Can with Brush in Cap
494-08916	08916	14 Oz. Aerosol Can



494-08916



Tire Branding Inserts





1" Letters and Numbers



ASCOT NO MEG NO







ASCOT NO.	MFG. NO.	DESCRIPTION
1" CH.	ARACTERS - I	NDIVIDUAL
452-00100	BI-CC-1BZ-0	0
452-00101	BI-CC-1BZ-1	1
452-00102	BI-CC-1BZ-2	2
452-00103	BI-CC-1BZ-3	3
452-00104	BI-CC-1BZ-4	4
452-00105	BI-CC-1BZ-5	5
452-00106	BI-CC-1BZ-6	6
452-00107	BI-CC-1BZ-7	7
452-00108	BI-CC-1BZ-8	8
452-00109	BI-CC-1BZ-9	9
452-00201	BI-CC-1BZ-A	A
452-00202	BI-CC-1BZ-B	В
452-00203	BI-CC-1BZ-C	С
452-00204	BI-CC-1BZ-D	D
452-00205	BI-CC-1BZ-E	E
452-00206	BI-CC-1BZ-F	F
452-00207	BI-CC-1BZ-G	G
452-00208	BI-CC-1BZ-H	Н
452-00209	BI-CC-1BZ-I	I
452-00210	BI-CC-1BZ-J	J
452-00211	BI-CC-1BZ-K	К
452-00212	BI-CC-1BZ-L	L
452-00213	BI-CC-1BZ-M	М
452-00214	BI-CC-1BZ-N	N
452-00215	BI-CC-1BZ-0	0
452-00216	BI-CC-1BZ-P	P
452-00217	BI-CC-1BZ-Q	Q
452-00218	BI-CC-1BZ-R	R
452-00219	BI-CC-1BZ-S	S
452-00220	BI-CC-1BZ-T	T
452-00221	BI-CC-1BZ-U	U
452-00222	BI-CC-1BZ-V	V
452-00223	BI-CC-1BZ-W	W
452-00224	BI-CC-1BZ-X	Х
452-00225	BI-CC-1BZ-Y	Y
452-00226	BI-CC-1BZ-Z	Z
.52 00220	55 IDE E	_

ASCOT NO.		MFG. NO.	DESCRIPTION	
	1"	CHARACTER	S - SETS	
	452-00001	TB1NOSET	1" Set - Numbers	
	452-00011	TB1LETSET	1" Set - Letters	

ASCOT NO.	MFG. NO.	DESCRIPTION
1/2"	CHARACTER	S - INDIVIDUAL
452-02100	BI-CC-1/2BR-0	0
452-02101	BI-CC-1/2BR-1	1
452-02102	BI-CC-1/2BR-2	2
452-02103	BI-CC-1/2BR-3	3
452-02104	BI-CC-1/2BR-4	4
452-02105	BI-CC-1/2BR-5	5
452-02106	BI-CC-1/2BR-6	6
452-02107	BI-CC-1/2BR-7	7
452-02108	BI-CC-1/2BR-8	8
452-02109	BI-CC-1/2BR-9	9
452-00501	BI-CC-1/2BR-A	A
452-00502	BI-CC-1/2BR-B	В
452-00503	BI-CC-1/2BR-C	С
452-00504	BI-CC-1/2BR-D	D
452-00505	BI-CC-1/2BR-E	E
452-00506	BI-CC-1/2BR-F	F
452-00507	BI-CC-1/2BR-G	G
452-00508	BI-CC-1/2BR-H	Н
452-00509	BI-CC-1/2BR-I	I
452-00510	BI-CC-1/2BR-J	J
452-00511	BI-CC-1/2BR-K	К
452-00512	BI-CC-1/2BR-L	L
452-00513	BI-CC-1/2BR-M	М
452-00514	BI-CC-1/2BR-N	N
452-00515	BI-CC-1/2BR-0	0
452-00516	BI-CC-1/2BR-P	P
452-00517	BI-CC-1/2BR-Q	Q
452-00518	BI-CC-1/2BR-R	R
452-00519	BI-CC-1/2BR-S	S
452-00520	BI-CC-1/2BR-T	T
452-00521	BI-CC-1/2BR-U	U
452-00522	BI-CC-1/2BR-V	V
452-00523	BI-CC-1/2BR-W	W
452-00524	BI-CC-1/2BR-X	Х
452-00525	BI-CC-1/2BR-Y	Υ
452-00526	BI-CC-1/2BR-Z	Z

ASCOT NO.	MFG. NO.	DESCRIPTION
1	/2" CHARAC	TERS - SETS
452-00012	TB1/2NOSET	1/2" Set - Numbers
452-00112	TB1/2LETSET	1/2" Set - Letters

1/4" CHARACTERS - INDIVIDUAL 452-01100	ASCOT NO.	MFG. NO.	DESCRIPTION
452-01101 BI-CC-1/4BR-1 1 452-01102 BI-CC-1/4BR-2 2 452-01103 BI-CC-1/4BR-3 3 452-01104 BI-CC-1/4BR-4 4 452-01105 BI-CC-1/4BR-5 5 452-01106 BI-CC-1/4BR-6 6 452-01107 BI-CC-1/4BR-7 7 452-01108 BI-CC-1/4BR-8 8 452-01109 BI-CC-1/4BR-9 9 452-0109 BI-CC-1/4BR-9 9 452-00401 BI-CC-1/4BR-B B 452-00402 BI-CC-1/4BR-B B 452-00403 BI-CC-1/4BR-B B 452-00404 BI-CC-1/4BR-B E 452-00405 BI-CC-1/4BR-B E 452-00407 BI-CC-1/4BR-F F 452-00408 BI-CC-1/4BR-B H 452-00409 BI-CC-1/4BR-B I 452-00410 BI-CC-1/4BR-B K 452-00411 BI-CC-1/4BR-W K 452-00412 BI-CC-1/4BR-N N 452-0041	1/4" (HARACTERS	- INDIVIDUAL
452-01102 BI-CC-1/4BR-2 2 452-01103 BI-CC-1/4BR-3 3 452-01104 BI-CC-1/4BR-4 4 452-01105 BI-CC-1/4BR-5 5 452-01106 BI-CC-1/4BR-6 6 452-01107 BI-CC-1/4BR-7 7 452-01108 BI-CC-1/4BR-8 8 452-01109 BI-CC-1/4BR-9 9 452-00401 BI-CC-1/4BR-B B 452-00402 BI-CC-1/4BR-C C 452-00403 BI-CC-1/4BR-B B 452-00403 BI-CC-1/4BR-B C 452-00404 BI-CC-1/4BR-B G 452-00405 BI-CC-1/4BR-B G 452-00406 BI-CC-1/4BR-B E 452-00407 BI-CC-1/4BR-B K 452-00408 BI-CC-1/4BR-B L 452-00409 BI-CC-1/4BR-B K 452-00409 BI-CC-1/4BR-B L 452-00410 BI-CC-1/4BR-B I 452-00411 BI-CC-1/4BR-B I 452-00412 BI-CC-1/4BR-B I 452-00413 BI-CC-1/4BR-B I 452-00414 BI-CC-1/4BR-B I 452-00415 BI-CC-1/4BR-B I 452-00416 BI-CC-1/4BR-B I 452-00417 BI-CC-1/4BR-B I 452-00418 BI-CC-1/4BR-B I 452-00419 BI-CC-1/4BR-B I 452-00419 BI-CC-1/4BR-B I 452-00420 BI-CC-1/4BR-B I 452-00421 BI-CC-1/4BR-B I 452-00422 BI-CC-1/4BR-V I 452-00422 BI-CC-1/4BR-V I 452-00422 BI-CC-1/4BR-W II 452-00428 BI-CC-1/4BR-W II	452-01100	BI-CC-1/4BR-0	0
452-01103 BI-CC-1/4BR-3 3 452-01104 BI-CC-1/4BR-4 4 452-01105 BI-CC-1/4BR-5 5 452-01106 BI-CC-1/4BR-6 6 452-01107 BI-CC-1/4BR-7 7 452-01108 BI-CC-1/4BR-8 8 452-01109 BI-CC-1/4BR-9 9 452-00401 BI-CC-1/4BR-A A 452-00402 BI-CC-1/4BR-B B 452-00403 BI-CC-1/4BR-C C 452-00404 BI-CC-1/4BR-B C 452-00404 BI-CC-1/4BR-C C 452-00405 BI-CC-1/4BR-E E 452-00406 BI-CC-1/4BR-E G 452-00407 BI-CC-1/4BR-F F 452-00408 BI-CC-1/4BR-F K 452-00409 BI-CC-1/4BR-H H 452-00409 BI-CC-1/4BR-H H 452-00410 BI-CC-1/4BR-I I 452-00410 BI-CC-1/4BR-I L 452-00410 BI-CC-1/4BR-N M 452-00411 BI-CC-1/4BR-N M 452-00412 BI-CC-1/4BR-N N 452-00413 BI-CC-1/4BR-N N 452-00414 BI-CC-1/4BR-N N 452-00415 BI-CC-1/4BR-N N 452-00416 BI-CC-1/4BR-N N 452-00417 BI-CC-1/4BR-N N 452-00418 BI-CC-1/4BR-N N 452-00419 BI-CC-1/4BR-N N 452-00419 BI-CC-1/4BR-N N 452-00419 BI-CC-1/4BR-N N 452-00410 BI-CC-1/4BR-N N	452-01101	BI-CC-1/4BR-1	1
452-01104 BI-CC-1/4BR-4 4 452-01105 BI-CC-1/4BR-5 5 452-01106 BI-CC-1/4BR-6 6 452-01107 BI-CC-1/4BR-7 7 452-01108 BI-CC-1/4BR-8 8 452-01109 BI-CC-1/4BR-9 9 452-00401 BI-CC-1/4BR-A A 452-00402 BI-CC-1/4BR-B B 452-00403 BI-CC-1/4BR-C C 452-00404 BI-CC-1/4BR-C C 452-00405 BI-CC-1/4BR-F F 452-00406 BI-CC-1/4BR-F G 452-00407 BI-CC-1/4BR-F G 452-00408 BI-CC-1/4BR-F K 452-00409 BI-CC-1/4BR-B H 452-00409 BI-CC-1/4BR-B H 452-00410 BI-CC-1/4BR-B H 452-00411 BI-CC-1/4BR-B K 452-00412 BI-CC-1/4BR-B N 452-00413 BI-CC-1/4BR-B N 452-00414 BI-CC-1/4BR-B N 452-00415 BI-CC-1/4BR-B N 452-00416 BI-CC-1/4BR-B N 452-00417 BI-CC-1/4BR-B R 452-00419 BI-CC-1/4BR-B R 452-00419 BI-CC-1/4BR-B R 452-00420 BI-CC-1/4BR-B R 452-00421 BI-CC-1/4BR-V V 452-00422 BI-CC-1/4BR-V V 452-00422 BI-CC-1/4BR-W W 452-00424 BI-CC-1/4BR-W W 452-00425 BI-CC-1/4BR-W W	452-01102	BI-CC-1/4BR-2	2
452-01105 BI-CC-1/4BR-5 5 452-01106 BI-CC-1/4BR-6 6 452-01107 BI-CC-1/4BR-7 7 452-01108 BI-CC-1/4BR-8 8 452-01109 BI-CC-1/4BR-9 9 452-00401 BI-CC-1/4BR-A A 452-00402 BI-CC-1/4BR-B B 452-00403 BI-CC-1/4BR-C C 452-00404 BI-CC-1/4BR-C C 452-00405 BI-CC-1/4BR-F F 452-00406 BI-CC-1/4BR-F G 452-00407 BI-CC-1/4BR-F G 452-00408 BI-CC-1/4BR-F F 452-00409 BI-CC-1/4BR-H H 452-00409 BI-CC-1/4BR-H H 452-00410 BI-CC-1/4BR-I I 452-00410 BI-CC-1/4BR-I L 452-00410 BI-CC-1/4BR-N N 452-00411 BI-CC-1/4BR-N M 452-00412 BI-CC-1/4BR-N N 452-00413 BI-CC-1/4BR-N N 452-00414 BI-CC-1/4BR-N N 452-00415 BI-CC-1/4BR-N N 452-00416 BI-CC-1/4BR-O O 452-00418 BI-CC-1/4BR-O Q 452-00419 BI-CC-1/4BR-R R 452-00419 BI-CC-1/4BR-R R 452-00419 BI-CC-1/4BR-N N 452-00419 BI-CC-1/4BR-N N 452-00419 BI-CC-1/4BR-N N 452-00419 BI-CC-1/4BR-N N 452-00420 BI-CC-1/4BR-V V 452-00421 BI-CC-1/4BR-V V 452-00422 BI-CC-1/4BR-W W 452-00422 BI-CC-1/4BR-W W 452-00424 BI-CC-1/4BR-W W	452-01103	BI-CC-1/4BR-3	3
452-01106 BI-CC-1/4BR-6 6 452-01107 BI-CC-1/4BR-7 7 452-01108 BI-CC-1/4BR-8 8 452-01109 BI-CC-1/4BR-9 9 452-00401 BI-CC-1/4BR-B B 452-00402 BI-CC-1/4BR-C C 452-00404 BI-CC-1/4BR-C C 452-00405 BI-CC-1/4BR-F F 452-00406 BI-CC-1/4BR-F G 452-00407 BI-CC-1/4BR-F G 452-00408 BI-CC-1/4BR-G G 452-00409 BI-CC-1/4BR-G G 452-00409 BI-CC-1/4BR-H H 452-00409 BI-CC-1/4BR-H L 452-00410 BI-CC-1/4BR-I I 452-00410 BI-CC-1/4BR-N N 452-00411 BI-CC-1/4BR-N M 452-00412 BI-CC-1/4BR-N N 452-00413 BI-CC-1/4BR-N N 452-00414 BI-CC-1/4BR-N N 452-00415 BI-CC-1/4BR-N N 452-00416 BI-CC-1/4BR-O O 452-00418 BI-CC-1/4BR-P P 452-00419 BI-CC-1/4BR-R R 452-00419 BI-CC-1/4BR-R R 452-00419 BI-CC-1/4BR-R R 452-00419 BI-CC-1/4BR-N N 452-00419 BI-CC-1/4BR-N N 452-00419 BI-CC-1/4BR-N N 452-00419 BI-CC-1/4BR-N N 452-00420 BI-CC-1/4BR-V V 452-00421 BI-CC-1/4BR-V V 452-00422 BI-CC-1/4BR-W W 452-00422 BI-CC-1/4BR-W W 452-00424 BI-CC-1/4BR-W W	452-01104	BI-CC-1/4BR-4	4
## ## ## ## ## ## ## ## ## ## ## ## ##	452-01105	BI-CC-1/4BR-5	5
452-01108 BI-CC-1/4BR-8 8 452-01109 BI-CC-1/4BR-9 9 452-00401 BI-CC-1/4BR-A A 452-00402 BI-CC-1/4BR-B B 452-00403 BI-CC-1/4BR-C C 452-00404 BI-CC-1/4BR-D D 452-00405 BI-CC-1/4BR-E E 452-00406 BI-CC-1/4BR-F F 452-00408 BI-CC-1/4BR-G G 452-00409 BI-CC-1/4BR-H H 452-00410 BI-CC-1/4BR-H I 452-00411 BI-CC-1/4BR-H K 452-00412 BI-CC-1/4BR-K K 452-00413 BI-CC-1/4BR-K K 452-00414 BI-CC-1/4BR-M M 452-00415 BI-CC-1/4BR-O O 452-00416 BI-CC-1/4BR-Q Q 452-00417 BI-CC-1/4BR-Q Q 452-00418 BI-CC-1/4BR-Q Q 452-00419 BI-CC-1/4BR-Q Q 452-00420 BI-CC-1/4BR-Y Y 452-004	452-01106	BI-CC-1/4BR-6	6
Section	452-01107	BI-CC-1/4BR-7	7
## ## ## ## ## ## ## ## ## ## ## ## ##	452-01108	BI-CC-1/4BR-8	8
## ## ## ## ## ## ## ## ## ## ## ## ##	452-01109	BI-CC-1/4BR-9	9
A52-00403 BI-CC-1/4BR-C C	452-00401	BI-CC-1/4BR-A	A
452-00404 Bi-CC-1/4BR-D D	452-00402	BI-CC-1/4BR-B	В
452-00405 Bi-CC-1/4BR-E E	452-00403	BI-CC-1/4BR-C	С
452-00406 BI-CC-1/4BR-F F 452-00407 BI-CC-1/4BR-G G 452-00408 BI-CC-1/4BR-H H 452-00409 BI-CC-1/4BR-I I 452-00410 BI-CC-1/4BR-J J 452-00411 BI-CC-1/4BR-K K 452-00412 BI-CC-1/4BR-K K 452-00413 BI-CC-1/4BR-M M 452-00414 BI-CC-1/4BR-M N 452-00415 BI-CC-1/4BR-O O 452-00416 BI-CC-1/4BR-P P 452-00417 BI-CC-1/4BR-P Q 452-00418 BI-CC-1/4BR-Q Q 452-00419 BI-CC-1/4BR-R R 452-00419 BI-CC-1/4BR-T T 452-00420 BI-CC-1/4BR-T T 452-00421 BI-CC-1/4BR-U U 452-00422 BI-CC-1/4BR-W W 452-00423 BI-CC-1/4BR-W W 452-00424 BI-CC-1/4BR-W X 452-00425 BI-CC-1/4BR-Y Y	452-00404	BI-CC-1/4BR-D	D
452-00407 BI-CC-1/4BR-G G 452-00408 BI-CC-1/4BR-H H 452-00409 BI-CC-1/4BR-I I 452-00410 BI-CC-1/4BR-J J 452-00411 BI-CC-1/4BR-K K 452-00412 BI-CC-1/4BR-L L 452-00413 BI-CC-1/4BR-M M 452-00414 BI-CC-1/4BR-N N 452-00415 BI-CC-1/4BR-O O 452-00416 BI-CC-1/4BR-P P 452-00417 BI-CC-1/4BR-Q Q 452-00418 BI-CC-1/4BR-R R 452-00419 BI-CC-1/4BR-R R 452-00420 BI-CC-1/4BR-T T 452-00421 BI-CC-1/4BR-U U 452-00422 BI-CC-1/4BR-V V 452-00423 BI-CC-1/4BR-W W 452-00424 BI-CC-1/4BR-W W 452-00425 BI-CC-1/4BR-W Y	452-00405	BI-CC-1/4BR-E	E
452-00408 BI-CC-1/4BR-H H	452-00406	BI-CC-1/4BR-F	F
452-00409 BI-CC-1/4BR-I I 452-00410 BI-CC-1/4BR-J J 452-00411 BI-CC-1/4BR-K K 452-00412 BI-CC-1/4BR-L L 452-00413 BI-CC-1/4BR-M M 452-00414 BI-CC-1/4BR-N N 452-00415 BI-CC-1/4BR-O O 452-00416 BI-CC-1/4BR-O Q 452-00417 BI-CC-1/4BR-O Q 452-00418 BI-CC-1/4BR-R R 452-00419 BI-CC-1/4BR-R R 452-00420 BI-CC-1/4BR-T T 452-00421 BI-CC-1/4BR-U U 452-00423 BI-CC-1/4BR-W W 452-00424 BI-CC-1/4BR-W W 452-00425 BI-CC-1/4BR-W X 452-00426 BI-CC-1/4BR-W X 452-00427 BI-CC-1/4BR-W X 452-00428 BI-CC-1/4BR-W X 452-00425 BI-CC-1/4BR-W	452-00407	BI-CC-1/4BR-G	G
452-00410 Bi-CC-1/4BR-J J 452-00411 Bi-CC-1/4BR-K K 452-00412 Bi-CC-1/4BR-L L 452-00413 Bi-CC-1/4BR-M M 452-00414 Bi-CC-1/4BR-N N 452-00415 Bi-CC-1/4BR-O O 452-00416 Bi-CC-1/4BR-P P 452-00417 Bi-CC-1/4BR-Q Q 452-00418 Bi-CC-1/4BR-R R 452-00419 Bi-CC-1/4BR-R R 452-00420 Bi-CC-1/4BR-T T 452-00421 Bi-CC-1/4BR-U U 452-00422 Bi-CC-1/4BR-V V 452-00423 Bi-CC-1/4BR-W W 452-00424 Bi-CC-1/4BR-W W 452-00425 Bi-CC-1/4BR-W X 452-00425 Bi-CC-1/4BR-W X 452-00425 Bi-CC-1/4BR-W Y X 452-00425 Bi-CC-1/4BR-W Y X 452-00425 Bi-CC-1/4BR-W Y X 452-00425 Bi-CC-1/4BR-W Y X X 452-00425 Bi-CC-1/4BR-W Y X X X X X X X X X	452-00408	BI-CC-1/4BR-H	Н
452-00411 BI-CC-1/4BR-K K 452-00412 BI-CC-1/4BR-L L 452-00413 BI-CC-1/4BR-M M 452-00414 BI-CC-1/4BR-N N 452-00415 BI-CC-1/4BR-O O 452-00416 BI-CC-1/4BR-P P 452-00417 BI-CC-1/4BR-Q Q 452-00418 BI-CC-1/4BR-R R 452-00419 BI-CC-1/4BR-S S 452-00420 BI-CC-1/4BR-T T 452-00421 BI-CC-1/4BR-U U 452-00423 BI-CC-1/4BR-V V 452-00424 BI-CC-1/4BR-W W 452-00425 BI-CC-1/4BR-X X 452-00425 BI-CC-1/4BR-X X 452-00425 BI-CC-1/4BR-X Y Y	452-00409	BI-CC-1/4BR-I	I
452-00412 BI-CC-1/4BR-L L	452-00410	BI-CC-1/4BR-J	J
452-00413 BI-CC-1/4BR-M M 452-00414 BI-CC-1/4BR-N N 452-00415 BI-CC-1/4BR-O O 452-00416 BI-CC-1/4BR-P P 452-00417 BI-CC-1/4BR-Q Q 452-00418 BI-CC-1/4BR-R R 452-00419 BI-CC-1/4BR-S S 452-00420 BI-CC-1/4BR-T T 452-00421 BI-CC-1/4BR-U U 452-00422 BI-CC-1/4BR-V V 452-00423 BI-CC-1/4BR-W W 452-00424 BI-CC-1/4BR-X X 452-00425 BI-CC-1/4BR-X X 452-00425 BI-CC-1/4BR-X Y Y Y Y Y Y Y Y Y	452-00411	BI-CC-1/4BR-K	K
452-00414 BI-CC-1/4BR-N N 452-00415 BI-CC-1/4BR-O O 452-00416 BI-CC-1/4BR-P P 452-00417 BI-CC-1/4BR-Q Q 452-00418 BI-CC-1/4BR-R R 452-00419 BI-CC-1/4BR-S S 452-00420 BI-CC-1/4BR-T T 452-00421 BI-CC-1/4BR-U U 452-00422 BI-CC-1/4BR-V V 452-00423 BI-CC-1/4BR-W W 452-00424 BI-CC-1/4BR-X X 452-00425 BI-CC-1/4BR-X X 452-00425 BI-CC-1/4BR-X Y Y 452-00425 BI-CC-1/4BR-X X 452-00425 BI-CC-1/4BR-X Y Y 452-00425 BI-CC-1/4BR-X Y Y 452-00425 BI-CC-1/4BR-X Y 452-00425 BI-CC-1/4BR-X Y	452-00412	BI-CC-1/4BR-L	L
452-00415 BI-CC-1/4BR-0 O 452-00416 BI-CC-1/4BR-P P 452-00417 BI-CC-1/4BR-Q Q 452-00418 BI-CC-1/4BR-R R 452-00419 BI-CC-1/4BR-S S 452-00420 BI-CC-1/4BR-T T 452-00421 BI-CC-1/4BR-U U 452-00422 BI-CC-1/4BR-W V 452-00423 BI-CC-1/4BR-W W 452-00424 BI-CC-1/4BR-X X 452-00425 BI-CC-1/4BR-X X 452-00425 BI-CC-1/4BR-Y Y V V V V V V V V	452-00413	BI-CC-1/4BR-M	М
452-00416 BI-CC-1/4BR-P P	452-00414	BI-CC-1/4BR-N	N
452-00417 BI-CC-1/4BR-Q Q 452-00418 BI-CC-1/4BR-R R 452-00419 BI-CC-1/4BR-S S 452-00420 BI-CC-1/4BR-T T 452-00421 BI-CC-1/4BR-U U 452-00422 BI-CC-1/4BR-V V 452-00423 BI-CC-1/4BR-W W 452-00424 BI-CC-1/4BR-X X 452-00425 BI-CC-1/4BR-X Y	452-00415	BI-CC-1/4BR-0	0
452-00418 BI-CC-1/4BR-R R	452-00416	BI-CC-1/4BR-P	P
452-00419 BI-CC-1/4BR-S S 452-00420 BI-CC-1/4BR-T T 452-00421 BI-CC-1/4BR-U U 452-00422 BI-CC-1/4BR-V V 452-00423 BI-CC-1/4BR-W W 452-00424 BI-CC-1/4BR-X X 452-00425 BI-CC-1/4BR-Y Y	452-00417	BI-CC-1/4BR-Q	Q
452-00420 BI-CC-1/4BR-T T 452-00421 BI-CC-1/4BR-U U 452-00422 BI-CC-1/4BR-V V 452-00423 BI-CC-1/4BR-W W 452-00424 BI-CC-1/4BR-X X 452-00425 BI-CC-1/4BR-Y Y	452-00418	BI-CC-1/4BR-R	R
452-00421 BI-CC-1/4BR-U U 452-00422 BI-CC-1/4BR-V V 452-00423 BI-CC-1/4BR-W W 452-00424 BI-CC-1/4BR-X X 452-00425 BI-CC-1/4BR-Y Y	452-00419	BI-CC-1/4BR-S	S
452-00422 BI-CC-1/4BR-V V 452-00423 BI-CC-1/4BR-W W 452-00424 BI-CC-1/4BR-X X 452-00425 BI-CC-1/4BR-Y Y	452-00420	BI-CC-1/4BR-T	T
452-00423 BI-CC-1/4BR-W W 452-00424 BI-CC-1/4BR-X X 452-00425 BI-CC-1/4BR-Y Y	452-00421	BI-CC-1/4BR-U	U
452-00424 BI-CC-1/4BR-X X 452-00425 BI-CC-1/4BR-Y Y	452-00422	BI-CC-1/4BR-V	V
452-00425 BI-CC-1/4BR-Y Y	452-00423	BI-CC-1/4BR-W	W
	452-00424	BI-CC-1/4BR-X	Х
452-00426 BI-CC-1/4BR-Z Z	452-00425	BI-CC-1/4BR-Y	Υ
	452-00426	BI-CC-1/4BR-Z	Z

ASCOT NO.	MFG. NO.	DESCRIPTION
1/-	4" CHARACTE	RS - SETS
452-00014	TB1/4NOSET	1/4" Set - Numbers
452-00114	TB1/4LETSET	1/4" Set - Letters







TIRE REGROOVER

Ergonomic handle design makes working with this tool easier and reduces hand-fatigue • An 8-position heat control modulates cutting intensity resulting in fast and accurate regrooving of Truck or Tractor tires • Not intended for Passenger vehicle tires • Blades are not included





The Rubber Cut 414 in use.

ASCOT NO.	MFG. NO.	DESCRIPTION
455-00003	RC414	Rubber Cut 414 Rema Regroover
455-00129	N/A	Set Screw for PS-15 Regroover
455-00401	W-1	Regroover Blades 20-Pack
455-00402	W-2	Regroover Blades 20-Pack
455-00403	W-3	Regroover Blades 20-Pack
455-00404	W-4	Regroover Blades 20-Pack
455-00405	W-5	Regroover Blades 20-Pack
455-00406	W-6	Regroover Blades 10-Pack
455-00444	No. 4 Head	Replacement Head for 125 Groover
455-04444	No. 4 Bld.	Replacement Blades for 125 Groover
455-12500	125	Heavy Duty Pistol Grip Tire Groover
455-15017	N/A	Transformer for PS-15 Regroover
455-15019	N/A	Rotative Switch for PS-15 Regroover

SERIAL NUMBER REMOVER TOOL



ASCOT NO.	MFG. NO.	DESCRIPTION
531-95001	TTHB-1	Serial Number Remover Tool
531-95002	RRB-1	12-Pack Replacement Blades

Bead Breakers



ASCOT NO.	MFG. NO.	DESCRIPTION
422-11010	11010	Bead Breaker
422-12000	12000	Bead Breaker Kit. INCLUDES: 11010 Bead Breaker, 15000 Pump and 16040 Hose Assembly
422-12020	12020	Bead Breaker Kit. INCLUDES: 11010 Bead Breaker, 15920 Pump and 16040 Hose Assembly
422-16200	16200	Conversion Kit for Combi Bead Breaker

MOST

POPULAR

422-11020

MODIFIED "COMBI" TIRE BEAD BREAKER

• Modified 11010, the most popular tool for breaking beads on all agriculture wheels

· Most affordable bead breaker for new 3 piece wheel assemblies • Modified jaw and feet allow for larger grab on larger wheel assemblies

• Can be used on the front and back side of the wheel assembly

· All parts (except for modified feet and jaw) can be interchanged with 11010

ASCOT NO.	MFG. NO.	DESCRIPTION
422-11020	11020	Modified "Combi" Tire Bead Breaker

GIANT TIRE/EARTHMOVER TIRE BEAD BREAKER

• Use on 5-piece rims 15" to 51" without pry bar/ bead loosening pockets • Model 15000, 15920 or 15040 air/hydraulic pump recommended for operation • Replaces Goodyear TO-100-HA



ASCOT NO. MFG NO DESCRIPTION

11040 Giant Tire/Earthmover Tire Bead Breaker 422-11040

GIANT TIRE/EARTHMOVER TIRE BEAD BREAKER

• 4-1/4" stroke, 14-ton ram will break the toughest beads • Use on 5-piece rim 25" to 51" with pry bar/bead loosening pocket • Replaces Goodyear TO-1600-HA • Same as IMT-1800 • Model 15000, 15020 or 15040 air/hydraulic pump recommended



The Giant Tire/ Earthmover Tire Bead Breaker in use

BREAKS

TOUGHEST

BEADS

ASCOT NO.	MFG. NO.	DESCRIPTION
422-11000	11000	Bead Breaker
422-12070	12070	Bead Breaker Kit. INCLUDES: 11000 Bead Breaker, 15000 Pump, 16040 Hose Assembly
422-12090	12090	Bead Breaker Kit. INCLUDES: 11000 Bead Breaker, 15920 Pump, 16040 Hose Assembly

TITAN FARTHMOVER BEAD BREAKER

• Ideal for tire dealer who requires occasional use of bead breaker • 10-ton cylinder has enough force to break most beads • 4" (10 cm) stroke length • Unit will work on 5 piece wheels with bead loosening pockets • WEIGHT: 34 lbs. (15.5 kg)

ASCOT NO.	MFG. NO.	DESCRIPTION
422-11005	11005	Titan Earthmover Bead Breaker



AM

422-11000



OTR GIANT TIRE BEAD BREAKER

· Compact, lightweight tool used primarily on 25" and 29" earthmover wheels • Originally marketed as Goodyear TO-1600-HA • Works only on 5 piece wheels with bead loosening pockets • 2 1/8" (5.4 cm) stroke • 10 tons of hydraulic force • Used with 10,000 PSI (700 bar) air/hydraulic pump • WEIGHT: 23 lbs. (10 kg)

ASCOT NO. 422-11050

MFG. NO. 11050

DESCRIPTION

OTR Giant Tire Bead Breaker



422-11050

422-11044

11044

AME

OTR 3000 GIANT TIRE BEAD BREAKER

· Designed specifically to work on Topy and Rimex OE wheels found on Terex, Komatsu, Liebherr and Le Tourneau • Designed to prevent the tool from kicking out while under load . 6' Stroke ram delivers maximum force • New Universal Jaw design works on ALL wheels 51" - 63" • WEIGHT: 54 lbs. (24.5 kg)



ASCOT NO 422-11044

MFG NO DESCRIPTION

11044 OTR 3000 Giant Tire Bead Breaker

GIANT TIRE/EARTHMOVER TIRE BEAD BREAKER

• Use on all 39", 45", 49", 51", 57" and 63" wheel sizes • In most cases you must first use Model 10105 or 10100 bead breaker to start the movement of the rim flange. Model 11030 can then be used • Model 15020 or 15040 air/hydraulic pump recommended for operation • Replaces Goodyear TO-2000-HA



422-10103

ASCOT NO.	MFG. NO.	DESCRIPTION
422-10103	11030	Giant Tire Earthmover Bead Breaker
422-12110	12110	Kit Contains 11030 Bead Breaker, 15040 Pump And 16020 Hose Assembly

DUAL AGRICULTURAL TRACTOR TIRE BEAD BREAKER

- HEAVY DUTY: 10-tons of force breaks the toughest beads Breaks inside bead on outside dual farm tractor tires • Requires just 3" of operating space between dual tractor tires • Use with 10,000 PSI air/hydraulic pump
- No need to remove outside wheel to change tire on outside dual



ASCOT NO.

MFG. NO

DESCRIPTION

11060 422-11060

Dual Agricultural Tractor Tire Bead Breaker

DUAL AGRICULTURAL 300 TIRE BEAD BREAKER

• Designed for all agricultural applications • Lightweight and easy to handle • Requires only 4 1/2" (11.5 cm) operating space • 5 Tons of pushing force • Opens to 12" (30.5 cm) wide • WEIGHT: 20 lbs. (9kg)



GIANT TIRE/ **EARTHMOVER BEAD BREAKER**

• Use on 5-piece 25" to 51" with pry bar/bead loosing pockets • Ram will break the toughest of beads • Use with 10,000 PSI Hydraulic Pump



DESCRIPTION

422-10100 10100 Giant Tire/Earthmover Bead Breaker



Bead Breakers (cont.)



TITAN PRO MODIFIED COMBI BEAD BREAKER

· Compact design allows tool to be used on front or back of wheel • Ideal to break large OTR 3-piece wheels · Larger clamp and feet allow tool to easily clamp onto wheels • Most parts interchange with common bead breakers in the market · Designed for use on

25" multi-piece wheels • Tire Sizes: 23.5x25,

26.5x25, 29.5x25 • 11 Ton - 10,000 PSI (700 BAR)

ASCOT NO. MFG. NO. 422-11025 11025

DESCRIPTION

Titan Pro Modified Combi Bead Breaker

STINGER BEAD BREAKER

• OTR Bead Breaker for 318-11090 heavy duty • 3-piece rims that replace standard 5-piece rims • Works on both front and back of wheel without dismounting wheel from vehicle . Works on all new 3-piece 25" wheels or larger • Works on all wheels with CAT "Shur-Lok" safety feature

ASCOT NO. 318-11090

MFG. NO. 11090

"COMBI" HYDRAULIC

TIRE BEAD BREAKER

seconds using 13.8 tons of

will not work on five-piece

force • "Combi" Bead Breaker

DESCRIPTION Stinger Bead Breaker

· Works on single, two and three-piece truck tires/rims • Breaks beads in Earthmover giant wheel/rim, Model #10100 or Model #10105 is required

SHUR-LOK'

SAFETY

FEATURE

422-11025

422-10101

ASCOT NO. 422-10101

MFG. NO.

DESCRIPTION

"COMBI" Hydraulic Tire Bead Breaker

MAXI BEAD BREAKER

• Works on ALL 3-piece wheels with extended flange that have replaced the older 5-piece wheels • Designed to work on front or back of the wheel with no attachments or accessories • Clamps easily to the wheel • Longer feet and claw than the "Combi" Bead

· No setup time

ASCOT NO. MFG. NO.

Breaker Model #10101

DESCRIPTION

422-10102 10102 Maxi Bead Breaker

COMBI STYLE ALUMINUM BEAD BREAKER

· Lightweight aluminum construction

• 10 tons of bead breaking force • Comparable to the Model #10101 Combi bead breaker • To be used or 3-piece wheel assemblies Extended jaw for deep dish style wheels (extended flange)

422-10102

422-40801

LIGHTWEIGHT

ALUMINUM

ASCOT NO. MFG. NO. DESCRIPTION

422-40801 40801 COMBI Style Aluminum Bead Breaker

DIAMONDBACK **ALUMINUM** BEAD BREAKER KIT

• Lightweight Aluminum reduces weight by 40%

· Longer feet allow better fit onto wheel/ rim • Feet fully engage rim flange and push against the bead of the tire • WEIGHT: 31 lb. (14kg)

ASCOT NO. MFG. NO. 422-11076 11076

Diamondback Aluminum Bead Breaker Kit







PNEUMATIC BEAD BREAKER

- Recommended for agricultural, small OTR and most truck tires
- EXTEMELY FAST: saves time over conventional hydraulic bead breakers
- LIGHTER WEIGHT THAN CONVENTIONAL BEAD BREAKERS: only 17 lb. • Includes storage case • Requires a minimum of 85 psi



ASCOT NO. 423-00101

MFG. NO.

DESCRIPTION

GTABB-01 Pneumatic Bead Breaker

SLIDE HAMMER BEAD BREAKER

• Protect your expensive wheels from swinging hammers by breaking the bead loose with this slide



ASCOT NO. 427-12026

MFG. NO.

DESCRIPTION

12026B

Slide Hammer Bead Breaker

WINNTEC WHEEL BREAKER SET

- Provides a safe and easy way to loosen oxidized (stuck) wheels • Simply place the ram between the duals or between the inside wheel & frame
- The manual pump allows the technician to feel how much pressure is being applied
- · Adaptors included for wider work spaces







The Winntec Wheel Breaker Set in use.

PLATINUM DEMOUNT TOOL

- Demounts tire sizes 17.5" 24.5" Only a single tool needed to demount tires • Eliminates the need to lift the tire and wheel making a hard job easy and protecting against insurance claims
- Unique design protects valuable tire casings for retreading
- Handle design protects against damage to the tool and other objects that may come in contact





ASCOT NO. 422-47180

MFG. NO. G471180 DESCRIPTION

Winntec Wheel Breaker Set



The Platinum Demount Tool in use.

ASCOT NO.

MFG. NO.

DESCRIPTION

448-12100 G12100 Platinum Demount Tool





Bead Breakers (cont.)

IMPACT BEAD BREAKER



ASCOT NO.	MFG. NO.	DESCRIPTION	LENGTH	LENGTH EXT.	WEIGHT
427-35924	T24B	Economy	46"	72"	13.5 lb.
427-35926	T26B	Heavy Duty	50"	80"	23 lb.
427-45926	35926-11	Impact Bead Breaker Replacement Grips			Grips

FLOOR TYPE BEAD BREAKER

• Use on custom wheels, without center holes, wide based motorcycle tires, ATV tires • Used to prevent bending of wheels



ASCOT NO.	MFG. NO.	DESCRIPTION	TREAD WIDTH	WEIGHT
421-00098	T98	Deluxe	Up to 11"	28.5 lb.



DRIVING IRON

· Used for loosening rusted truck and bus beads



ASCOT NO.	MFG. NO.	DESCRIPTION	LENGTH	STOCK	WEIGHT
427-26000	T26A	Driving Iron	11-3/4"	1-1/4"	4.4 lb.




• PORTABLE TOOLS: Great alternative to handled bead breaking wedges or hydraulic bead breakers



ASCOT NO.	MFG. NO.	LENGTH	STOCK	WT.
427-00041	T41	30"	7/8"	5.3 lb.
427-00042	T42	30"	7/8"	4.8 lb.
427-00052	T52	33"	7/8"	5.5 lb.

ATV BEAD BREAKER





ASCOT NO.	MFG. NO.	DESCRIPTION	WEIGHT
421-38620	38620	ATV Bead Breaker	7 lb.





5-QUART AIR HYDRAULIC PUMP - STEEL RESERVOIR

• Builds 10,000 PSI of pressure • Operates on 80-120 PSI of inlet air pressure • Durable metal air motor assemblies • Designed for conditions associated with OTR sites • WEIGHT: 30 lbs (13.6 kg)





318-15025

ASCOT NO

DESCRIPTION MFG. NO.

318-15025

15025

5-Quart Air/Hydraulic Pump with Steel Reservoir

TURBO II AIR HYDRAULIC PUMP (3.5-QUART OIL CAPACITY)

• Rugged polyglass reservoir with sight gauge • 10,000 PSI hydraulic pressure • Easily works on rams and bead breakers with oil to spare • Unique design easily fits truck storage bins • Turbo II pump-fastest pump available • Redesigned air motor is inexpensive to service • User-friendly footactuated design for easy control of moving fluid



ASCOT NO.	MFG. NO.	DESCRIPTION
318-15000	15000	3.5-Quart Air Hydraulic Pump
318-15010	15010	Above Pump With Hydraulic Hose
318-15020	15020	5-Quart Air Hydraulic Pump

AIR HYDRAULIC PUMP (5-QUART OIL CAPACITY)

• Rugged 5-quart metal reservoir • Air inlet filter keeps air clean • All-metal air motor

• 10,000 PSI hydraulic pressure



ASCOT NO.	MFG. NO.	DESCRIPTION
318-15920	15920	5-Quart Air Hydraulic Pump
318-15930	15930C	Air Hydraulic Pump w/Hose & Coupler

MILLER MUD FLAP

- Fits AME 15920 and IMT style pumps
- Prevents dirt from getting into the release valve assembly • Inexpensive solution to lengthen the life of your pumps



318-15901

ASCOT NO.	MFG. NO.	DESCRIPTION
318-15901	15901	Miller Mud Flap

AIR HYDRAULIC PUMP (2-GALLON OIL CAPACITY)

• Rugged 2-gallon metal reservoir • Air inlet filter keeps air clean • All metal air motor • 10,000 PSI hydraulic pressure



ASCOT NO.	MFG. NO.	DESCRIPTION
318-15940	15940	2-Gallon Air Hydraulic Pump
318-15950	15950C	2-Gallon Air Hydraulic Pump w/Hose & Coupler

Hydraulic Pumps, Rams

1/2-GALLON AIR/HYDRAULIC PUMP - ALUMINUM RESERVOIR

- For use with a variety of hydraulic rams, cylinders, presses, bead breakers, and other hydraulic equipment requiring 10,000 psi for operation
- Equipped with an air exhaust muffler for quiet pumping of air motor
- Air and oil inlet filters for reducing risk of damage from contamination
- Durable, lightweight design great for service trucks, shop environments or out in the field
- Internal pressure relief valve system (load limit device) for overload protection
- Engineered with durable lightweight and corrosive resistant plastic components. increasing the life of the air motor and hydraulic pump



ASCOT NO.	MFG. NO.	DESCRIPTION
318-10518	10518	1/2-Gallon Air/Hydraulic Pump
318-11518	10518C	1/2-Gallon Air/Hydraulic Pump Kit. INCLUDES Hose, Coupler & Reducer





2½-QUART TITAN AIR/HYDRAULIC PUMPS - ALUMINUM RESERVOIRS

- Operates with as little as 80 PSI (5.5 bar)
- Heavy duty aluminum reservoir Durable metal air motor • WEIGHT: 14 lb. (6.4 kg)







ASCOT NO.	MFG. NO.	DESCRIPTION
318-15905	15905	2-1/2-Quart Titan Air/Hydraulic Pump, 10,000 PSI
318-15906	15906	2-1/2-Quart Titan Air/Hydraulic Pump, 5,500 PSI
318-15907	15907	2-1/2-Quart Titan Air/Hydraulic Pump, 3,900 PSI
		Air/Hydraulic Pump, 5,500 PSI 2-1/2-Quart Titan Air/Hydraulic







100-TON ALUMINUM RAMS

· Lightweight yet durable

• The preferred jack for road service

• Includes "Shut-Off Valve" to allow the pump to be removed while ram is extended





ALUMINUM LOCK NUT FOR

EXTENDED

ASCOT NO.	MFG. NO.	CAP. (TONS)	STROKE	MIN. HEIGHT	MAX. HEIGHT	WEIGHT (LBS.)
318-13000	13000	100	6"	12"	18"	53
318-13164	13164	100	6"	15.59"	21.5"	59

55-TON ALUMINUM RAMS

• Lightweight aluminum for easy handling and placement under the vehicle

• Includes "Shut-Off Valve" which allows the pump to be removed while the ram is extended



ASCOT NO.	MFG. NO.	CAP. (TONS)	STROKE	MIN. HEIGHT	MAX. HEIGHT	WEIGHT (LBS.)
318-13120	13120	55	6"	12.25"	18.25"	29
318-13165	13165	55	6"	15.59"	21.5"	33

▲ WARNING: For more information go to www.P65Warnings.ca.gov.

318-13120



55-TON HYDRAULIC JACKS - ALUMINUM

- Lightweight Aluminum constructed Hydraulic Cylinder
- For use with 10,000 psi pumps
- Ships completely assembled with valve, coupler, and 8" x 8" base
- Ideal for OTR, mining, agricultural and construction applications
- Robust 11/16" cylinder wall for heavy-duty use



ASCOT NO.	MFG. NO.	CAP. (TONS)	STROKE	MIN. HEIGHT	MAX. HEIGHT	WEIGHT (LBS.)
318-10312	10312	55	6"	12"	18"	33
318-10314	10314	55	6"	16"	26"	41

100-TON HD LIGHTWEIGHT HYDRAULIC JACK

- · Lightweight yet durable
- For use with 10,000 PSI pumps
- Ships completely assembled with valve and coupler





ASCOT NO.	MFG. NO.		STROKE		MAX. HEIGHT	
318-10300	10300	100	6"	11.75"	17.75"	55

178 TIRE & WHEEL SERVICE



Hydraulic Pumps, Rams (cont.)

HYDRAULIC RAMS

• Used to push off rear rim flange and tire bead on earthmover wheels • For all earthmover tires, trucks and perfect for construction

A	SCOT NO.	MFG. NO.	CAP. (TONS)	COLLAPSED HEIGHT	STROKE
4	122-13010	13010	10	4-3/4"	2-1/8"
4	22-13020	13020	10	6-3/4"	4"
4	22-13030	13030	10	9-3/4"	6-1/8"
4	22-13040	13040	10	11-3/4"	8"
4	22-13050	13050	10	13-3/4"	10-1/8"
4	22-13060	13060	30	4-5/8"	2-7/16"
4	22-13090	13090	25	12-3/4"	8-1/4"
4	122-13100	13100	25	10"	6-1/4"



STEEL-A-STACK HYDRAULIC RAM KIT

- Versatile ram kit allows you to select your ram length from 3.5" (9 cm) up to 11.5" (29.21 cm) Extensions can be used individually or together • Steel Extensions are durable enough for OTR applications • Extensions include 1" (2.5 cm), 2" (5 cm), and 3" (7.5 cm) options
- 3" Extension includes a screw in saddle that extends another 2" Ships in HD carrying case 10 Ton 1.5" (3.8 cm) stroke



ASCOT NO. MFG. NO. DESCRIPTION 422-13075 13075 Steel-A-Stack Hydraulic Ram Kit









HYDRAULIC COUPLERS

• High-flow hydraulic coupler, 10,000 PSI working pressure

ASCOT NO.	MFG. NO.	DESCRIPTION
135-10605	PVV-38-M	3/8" Male Hose Half Coupler - For Hydraulic Rams
135-10606	PVV-38-F	3/8" Female Ram Half Coupler - For Hydraulic Rams



HYDRAULIC QUICK CONNECT COUPLER/PLUG

- 10,000 PSI maximum operating pressure Safety sleeve lock prevents accidental disconnection
- Heavy duty back-up ring prevents o-ring extrusion Heat treated and plated steel for greater wear and corrosion resistance • Self-sealing poppet valves provide excellent high and low pressure seating

ASCOT NO.	MFG. NO.	DESCRIPTION
135-11606	FD35-1001-0606	Hydraulic Quick Connect Coupler
135-12606	FD35-1002-0606	Hydraulic Quick Connect Plug

RUBBER DUST COVER FOR HYDRAULIC COUPLERS

• Used to keep dirt and debris from your hydraulic coupler when not connected • Equipped with a pre-slit ring to allow coupler to slide easily over the counter • Comes standard with 8' and 10' hydraulic hoses

ASCOT NO. MFG. NO. DESCRIPTION 319-03732 03-RDC Rubber Dust Cover for Hydraulic Couplers

3/8" HYDRAULIC HOSES

• 10,000 PSI Working Pressure, 20,000 PSI Burst Pressure • High flow valve for fast inflation • Includes half coupler and plastic dust cover

ASCOT NO.	MFG. NO.	DESCRIPTION
318-04960	9010-08	8' Hydraulic Hose Assembly
318_0/120	9010-10	10' Hydraulic Hose Assembly



QUICK COUPLERS

• Precision built and designed for high pressure • Permits disconnecting without loss of oil • 3/8" NPTF

ASCOT NO.	MFG. NO.	DESCRIPTION
318-09795	9795	Complete Quick Coupler
318-09796	9796	Ram Half Coupler And Dust Cap
318-09798	9798	Hose Half Coupler Only
318-09799	9799	Hose Half Coupler Dust Cap Only



135-10605







135-12606







▲ WARNING: For more information go to www.P65Warnings.ca.gov.



318-09798





OTR Service Tools

FLANGE RING PULLER

· Lifts the rim base and bead seat band from AIDS IN the tire • Aids in bead **BEAD** seating during inflation SEATING · Attaches to a standard boom style service truck • 4-point hook/chain assembly for optimal lifting • Chain lengths of 30" (76.2 cm) • Includes 2 flat hooks and 2 tapered hooks to allow use on all rim styles • WEIGHT: 32 lb. ASCOT NO. MFG. NO. CAPACITY 402-08029 93000 5,000 lb. 402-08029

2-WAY PUSH BAR





The 2-Way Push Bar in use.

ASCOT NO.	MFG. NO.	CAPACITY
429-06661	92005	33" to 57"
429-08837	92000	25" to 51"

BEAD PUSH OFF TOOL

• Lightweight tool for removing combine and tractor tires after breaking the bead • Pushing force of 8,000 lbs. and a 5.5" stroke, a removable handle for compact storage and uses hydraulic pressure to force the tire off the rim • Hooks between the rim and the tire bead





The Bead Push Off Tool in use.

ASCOT NO.	MFG. NO.	DESCRIPTION
429-10108	11080	Bead Push Off Tool

BEAD HOOKS



ASCOT NO.	MFG. NO.	DESCRIPTION	CAPACITY
429-00441	B0441PC	Bead Hook	12,000 lb.
429-01601	D1601PC	Bead Hook	16,000 lb.





FARTHMOVER TIRE BEAD HOOKS

• Used to connect with hydraulic boom on tire service truck for transport of tires • Model 94000 has slim design which will fit inside all tires, even ones that have been stacked





The Earthmover Tire Bead Hook in use.

ASCOT NO.	MFG. NO.	DESCRIPTION	CAPACITY
429-90401	94010	Earthmover Tire Bead Hook	16,000 lb.
429-90402	94020	Earthmover Tire Bead Hook	12,000 lb.
429-90403	94000	Earthmover Tire Bead Hook	4,000 lb.

TIRE SLING

• Adjustable locking sling for dismounting single or dual assembly tires • With locking mechanism so tires don't rotate • MADE IN THE USA





402-06662

ASCOT NO.	MFG. NO.	DESCRIPTION	CAPACITY
402-06662	91000	Small Sling Assembly	6,500 lb.

RING MASTER O-RING AND LOCK RING INSTALLER

• Pushes & Holds rim flange & tire back for easy O-ring and lock ring installation • Lightweight and easy to use • PORTABLE: Fits in tire truck tool box • Eliminates use of boom crane & cumbersome tire tools • Easy one-man operation • Works on all 3-piece and 5-piece rim/wheels up to 30" in diameter • Great for tough to handle forestry tires/wheels • Eliminates danger

of pushing equipment off jack

with crane • MADE IN THE USA



The Ring Master O-Ring and Lock Ring Installer in use.



ASCOT NO.	MFG. NO.	DESCRIPTION
429-70162	70162	Ring Master O-Ring and Lock Ring Installer



Cribbing Sets & Wheel Chocks

Chibbing Sets & Wheel Choc

WILL NOT

BEND OR

CRIB STANDS FOR 55-TON CYLINDERS

- Steel cribbing is durable, will not bend or warp • Recessed area on cribbing fits 7" square plate on 55-ton cylinders
- Each unit contains a built in carrying handle
- Tested/Certified up to
 100 tons Available in
 three sizes Also available
 in a kit (Ascot No. 429-08074)
 that includes all three sizes



429-08075



429-08076



ASCOT NO. MFG. NO. DESCRIPTION
429-08075 15012 3" Steel Crib Stand
429-08076 15022 6" Steel Crib Stand
429-08077 15032 9" Steel Crib Stand



STEEL CRIB KIT

• Durable Steel Cribbing, will not bend or warp • MODEL

15002 IS A COMPLETE SET: 3", 6" and 9" stands • Units can be nested

together for 18" of total lift • Recessed area on cribbing fits 7" square plate on 55-Ton Cylinders • Each unit has a carry handle



To square place on 33-1on cylinders - Each unit has a carry handle

The Steel Crib Stand in use.

ASCOT NO. MFG. NO. DESCRIPTION
429-08074 | 15002 | Steel Crib Kit

SUPER STACKER CRIBBING BLOCKS

• 100% recycled plastic • Unmatched strength - stronger than wood • Resistant to gas, oil and chemicals • Certified tested • 50-year warranty against splitting, rot, fluid absorption, termites or mold caused by the environment • Color-coded lanyards depcit each block's working load limit • MADE IN THE USA



ASCOT NO.	MFG. NO.	DESCRIPTION
429-15230	15230	6" x 7" x 24" Cribbing Block with Blue Lanyard, WORKING LOAD LIMIT: 110,010 lb. (49,900 kg)
429-15239	15239	6" x 7" x 24" Cribbing Block with Orange Lanyard, WORKING LOAD LIMIT: 129,631 lb. (58,800 kg)

SUPER STACKER CRIBBING KIT

- 100% recycled plastic
- Unmatched strength
- stronger than wood
- Resistant to gas, oil and chemicals Certified tested
- 50-year warranty against splitting, rot, fluid absorption, termites or mold caused by the environment

• Compatible with 14500-14503 & 14468LT Jack Plates• MADE IN THE USA



ASCOT NO. MFG. NO. 429-15266 | 15266

DESCRIPTION

KIT INCLUDES: (12) 15239 & (1) 14468LT







POLYURETHANE WHEEL CHOCKS

- Solid light weight construction, high impact polyurethane material
- Non-conductive, no threat to puncture the tire
- Durable, light weight, and easy to use
- Extensively field tested



POLYURETHANE WHEEL CHOCKS

- Rugged yet lightweight, weather-resistant Polyurethane wheel chocks
- Safety yellow for high-visibility and meets OSHA/MSHA standards
- Built-in carrying handle & holes for installation of ropes, chains and/or mounting brackets



	396-12590
396-12594	396-12596

ASCOT NO.	MFG. NO.	TIRE SIZE	SIZE (L X W X H)	WEIGHT		
396-15337	15337	15.25" to 86.75"	18" x 12" x 9"	13 lb.		
396-15338	15338	71" to 118"	22.5" x 13" x 14"	19.8 lb.		
396-15339	15339	86.75" to 137.75"	24" x 13.5" x 12"	24.3 lb.		
396-15342	15342	110.25" to 177"	26.7" x 13" x 14"	30.86 lb.		

▲ WARNING: For more information go to www.P65Warnings.ca.gov.

ASCOT NO.	MFG. NO.	TIRE SIZE	SIZE (L X W X H)	WEIGHT
396-12590	12590	Up to 27 in.	8" x 7" x 6"	2
396-12593	12593	46" to 65"	12.125" x 15.25" x 10.75"	16
396-12594	12594	Up to 65 in.	16.25" x 14.5" x 13.25"	20
396-12596	12596	Up to 165 in.	24.5" x 14.25" 16"	34



Bead Seating Devices

RPG 5-GALLON BEAD SEATERS

- 5-gallon capacity
- Equipped with a butterfly valve for maximum air discharge
- Designed for commercial use on large truck tires, passenger and ATV tires to 24.5"
- Rubber foot pads to lessen vibration
- Made in Taiwan

ASCOT NO. 473-01500	MFG. NO.	DESCRIPTION 5-Gallon Bead Seater with Butterfly Valve
473-02505	RPG-05GALED	5-Gallon Bead Seater with Butterfly Valve - End Discharge
473-02501	RPG-05GALAL	5-Gallon Bead Seater with Butterfly Valve - ALUMINUM

RPG 10-GALLON BEAD SEATERS

- 10-gallon capacity
- Equipped with a butterfly valve for maximum air discharge
- Designed for commercial use on large truck tires, passenger and ATV tires to 24.5"
- Made in Taiwan

,	ASCOT NO.	MFG. NO.	DESCRIPTION
	473-02510	RPG-10GAL	10-Gallon Bead Seater with Butterfly Valve
	473-02511	RPG-10GALAL	10-Gallon Bead Seater with Butterfly Valve - ALUMINUM

RPG 13-GALLON BEAD SEATER

- Aluminum tank
- 10-gallon capacity
- Equipped with a butterfly valve for maximum air discharge
- Designed for commercial large truck tires 24" to 54"
- Made in Taiwan

ASCOT NO.	MFG. NO.	DESCRIPTION
473-02513	RPG-13GALAL	13-Gallon Bead Seater with Butterfly Valve - ALUMINUM








5-GALLON CHEETAH BEAD SEATER

• Makes seating the most difficult bead safe and simple • 5-gallon capacity

• APPLICATIONS: Designed for commercial use on large truck tires, passenger and ATV tires to 24.5" • Fill tank from

any service station chuck or service truck air compressor



473-00500

BS-07 CHEETAH BEAD SEATER

• "End of Tank" discharge design, flared discharge barrel and a 2" discharge valve for maximum bead seating power • Makes seating the most difficult bead not only safe but simple, fast and economical • 5-gallon capacity, ASME certified tank • SIZE: 34"(L) x 12"(W) x 15"(H)

ASCOT NO. MFG. NO. DESCRIPTION 473-00207 BS-07 BS-07 Cheetah



473-00207



10-GALLON CHEETAH BEAD SEATER

• 10-gallon capacity with ASME certified tank • APPLICATIONS: Designed for small rear agri/grader or smaller tires; Standard for fleet work, farm and service trucks



ASCOT NO.	MFG. NO.	DESCRIPTION
473-00010	CH-10	10-Gallon
473-00011	CH-10AL	10-Gallon With Aluminum Tank

13-GALLON CHEETAH BEAD SEATER

• 13-gallon capacity with ASME certified tank • APPLICATIONS: Seats bead on tractor & heavy equipment tires from 24.5" to

54" • Includes a straight barrel, new Magnum barrel (for larger tires) and safety goggles as standard equipment • Extends tire



VIPER™ BEAD SEATERS

- Push button discharge
- Unique handle design for stability and control
- ASME Certified
- · Rapid release of air
- Newly designed jet barrel for greatly increased air volume delivery
- More power less air pressure
- Reduces air noise
- Greater air distribution
- · No wheel damage
- Works on large range of tires

ASCOT NO.	MFG. NO.	DESCRIPTION
473-01110	VP 10S	Viper™ 11.5 Liter Bead Seater, Steel Tank
473-01113	VP 13AL	Viper™ 13 Liter Bead Seater, Aluminum Tank
473-01118	VP 18AL	Viper™ 18 Liter Bead Seater, Aluminum Tank

*Please note we recommend the use of a good quality inline filter to remove contaminants and moisture.







JET PAK BEAD SEATER **UPGRADE DEVICE**

• Faster and easier than standard ball or butterfly discharge valve operation • Discharges tank with the press of a button • Safety cover prevents accidental trigger release • TWO PORT SIZES AVAILABLE: CH1.5JP (1.5") and CH2.0JP (2") to fit any standard bead seater in a variety of tank sizes • Attaches easily to existing pipe nipple, replacing manual discharge valve • Includes our new improved Jet Barrel (VP 3.103 or VP 2.103) for greater air volume delivery • Comfortable handle assures firm grip and ease of use • All internal components can be



GAITHER RAR VALVE UPGRADE KITS

- The Gaither RAR Valves are the most powerful inflation valves available - same as used on the popular Bead Bazookas • 1.5" and 2" available to upgrade your current inflation tank • Completely serviceable!! This means that if something should become defective down the road, the seal, valve, spring or all three can be replaced! • Push-button release trigger allows technician to keep both hands on the tank for optimum control
- hand users based on preference · Each valve includes a barrel for

during use • Reversible handle

allows for both right hand and left



BEAD SEAT BAND INSTALLER

• Uses hydraulic force to install bead seat bands in earthmover tires • 25 tons of hydraulic force to ensure that all bead seat bands are installed effortlessly • The angled plate rests against a large section of the tire, ensuring protection of the bead during installation • WEIGHT: 40 lbs (18.1 kg)




EASY-LIFT™ BEAD **SEATING STAND**

• Portable for field service, or can be bolted to the floor • With hub facing out, simply roll mounted tire and wheel assembly to front of stand • Push assembly onto crown tire and wheel will automatically fall onto center of stand and rest with bead centered on bottom wheel flange • Seat beads by inflating tire to 4 PSI (max.) • Step around stand and easily lift assembly into vertical position • Roll assembly into tire inflation safety cage for final inflation • SIZE: 4"H x 26"W x 27"L



ASCOT NO.	MFG. NO.	DESCRIPTION	4/3-129	42	
73-00020	CH-2.0JP	Jet Pak Bead Seater Upgrade Device - 2" Port Size	ASCOT NO.	MFG. NO.	DESCRIPTION
73-00015	CH-1.5JP	Jet Pak Bead Seater Upgrade Device - 1.5" Port Size	473-12941	12941R	1.5" RAR Valve Upgrade Kit
			473-12942	12942R	2" RAR Valve Upgrade Kit

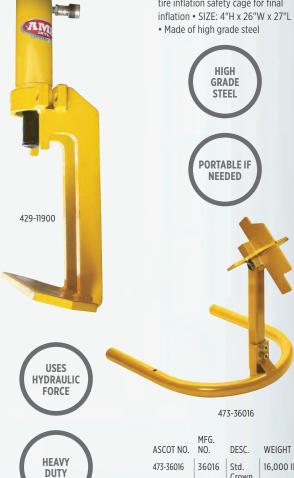

ASCOT NO. 473-36016	MFG. NO. 36016	DESC. Std. Crown for 8-3/4" Dia. Hubs	WEIGHT 16,000 lb.
473-36017	36017	Large	12,000 lb.



Crown for 11"

Hubs

ASCOT NO. MFG. NO.

11900

429-11900

DESCRIPTION

Bead Seat Band Installer

<u>BeadBazooka</u>





473-00103



- Smaller and more powerful than previous designs
- Serviceable/Replaceable 2" RAR valve
- Utilizes ultra-compact design
- Anti-corrosion interior tank coating
- Perfect for motorcycle, cars, or light commercial vehicle tire service (3L2)
- Perfect for cars and commercial vehicle tire service (6L2)
- Perfect for commercial and light agricultural vehicle tire service (10L2)

ASCOT NO.	MFG. NO.	DESCRIPTION	WEIGHT		INNER DIAMETER
473-00103	GBB3L2	Bead Bazooka 3L2	14 lbs.	23" x 6" x 12"	4 in.
473-00106	GBB6L2	Bead Bazooka 6L2	15 lbs.	23" x 7" x 12"	4.75 in.
473-00110	GBB10L2	Bead Bazooka 10L2	18 lbs.	30" x 7" x 12"	5.5 in.
473-00100	BBVRK	Bead Bazooka	N/A	N/A	N/A







BEAD BAZOOKA SPARE PARTS:

ASCOT NO.	MFG. NO.	DESCRIPTION
473-12913	12913B	Slotted Double Barrel
473-12914	12914B	Pressure Gauge
473-12915	12915B	Y-Connect
473-12916	12916B	Intake Valve
473-12917	12917B	Safety Valve
473-12919	12919B	Switch Valve
473-12920	12920B	Grip with Trigger Guard
473-12921	12921B	Plastic Plug
473-12923	12913BC	Slotted Double Barrel without Clip
473-12930	12930M	F3 Connector







473-12930





473-12916

473-12923

188 TIRE & WHEEL SERVICE

Bead Seating Devices (cont.)

GAITHER'S BEAD SAVER SYSTEM

• By using simple principles of leverage, the Bead Saver System actually works with tire and rim to do the work for you • Patented design • Safest, fastest, easiest way ever invented to change tubeless truck tires • Guaranteed not to damage tire beads

MEG NO DESCRIPTION ASCOT NO. 448-12880 12880 Bead Saver System

5-GALLON BEAD BOOSTER

• Creates a blast of air used for seating tubeless tire beads • Release valve safety lock prevents inadvertent discharge • Powder-coated inside and out to protect from rust and deterioration caused by moisture

• Double Barrel directs the air around the tire for a better "lift" • Safety pop-off valve prevents overloading with too much air pressure

ASCOT NO. MFG. NO. DESCRIPTION 473-00005 GB-5Z 5-Gallon Bead Booster

5-GALLON BEAD BOOSTER WITH MIS VALVE

• The BEAD BOOSTER® GB-5M comes equipped with the same MIS valve as the famous BEAD BAZOOKA® Tommy Gun giving it the ability to seat almost any tire • CE/ASME certified tank • New MIS valve with a 2" opening • Internal proprietary coating protects against rust • Includes Gaither's trusted 3 year warranty

ASCOT NO MFG. NO. DESCRIPTION 5-Gallon Bead Booster with MIS Valve

GAITHER J1 MOUNT/DEMOUNT TOOL

• Slightly altered and condensed version of the original Bead Saver System • 2-piece system that mounts and dismounts all standard 19.5", 22.5" and 24.5" tubeless tires up to a 315/80R22.5, including those mounted on aluminum wheels • Differs from the original system in that each process is done completely while the tire is flat on the ground • The first Bead is dismounted with the clevis & crook/spoon end • The second Bead is dismounted with the J-1 end without picking the tire up • The first bead can be mounted with the J-1 end • The second Bead is mounted with the spoon end • Two Beadkeepers can be used to assist with mounting

ASCOT NO. MFG. NO. DESCRIPTION 448-00001 Mount/Demount Tool

GAITHER SUPER SLICK'EM™

 Gaither's Super Slick'em[™] should be applied to all tires before being mounted or before deflation if being dismounted • Super Slick'em™ is a special nonwater based lubricant that penetrates and aids in breaking the tire bead from the wheel by eating away rust and grease. Because it does not contain water, Super Slick'em™ will not freeze or cause rust to form • SUPER SLICK'EM™ 12904 INCLUDES: 4-1 gallon (3.8 liter) containers and 1 applicator bottle

DESCRIPTION ASCOT NO MFG NO 421-12904 G12904 Gaither Super Slick'em™





448-00001

448-12894

448-32894

448-22894



PNEUMATIC BEAD EXPANDERS

• Fits most bias ply passenger tires • Pliable neoprene rubber tube encased in tough nylon cover • Withstands contact with oil, grease, solvents and acid



ASCOT NO.	MFG. NO.	MIN./MAX. DIAM.	TUBE DIAM.	WEIGHT
471-31432	31432	24"-34"	2-1/4"	2.8 lb.
471-31433	31433	22"-32"	3/4"	.75 lb.

WARNING: For more information go to www.P65Warnings.ca.gov.



YELLOW RUBBER COATED BEADKEEPER

• Keeps truck tire bead from slipping during mounting of top bead • Rubber coated steel construction • Will not scratch aluminum wheels • Great for hard to mount tires, a must for all super singles

• Equivalent to Gaither 12894C & ESCO 70140

ASCOT NO. MFG. NO. DESCRIPTION

448-12894 12894C Yellow Rubber Coated Beadkeeper

BLUE WIDE MOUTH RUBBER COATED BEADKEEPER

· Wider mouth works on newer, wider Alcoa wheels

• Keeps truck tire bead from slipping during mounting of top bead • Rubber coated steel construction • Will not scratch aluminum wheels • Great for hard to mount tires, a must for all super singles

• Equivalent to Gaither 12894-CW

ASCOT NO. MFG. NO.

448-32894 12894-CW Wide Mouth Blue Rubber Coated Beadkeeper

STEEL BEADKEEPER

• THE ORIGINAL BEADKEEPER* • Used to hold a tire bead in place during the mounting process • Eliminates the need to stand on the tire and/or use a second mounting bar

ASCOT NO. MFG. NO. DESCRIPTION 448-22894 12894 Steel Beadkeeper

BEADKEEPERS-ON-A-ROPE

• Used to hold the tire in place while mounting the second bead • These tools eliminate the dangerous job of standing on the tire in order to mount it • After the first bead is mounted, simply place two Beadkeepers on the flange of the wheel and spread them apart as far as possible; Use the Spoon End of the bar to mount a small part of the bead and slide the closest Beadkeeper to the bar; Repeat this step until the entire second bead is mounted

ASCOT NO. MFG. NO. DESCRIPTION 448-42894 12894-P Beadkeepers-On-A-Rope





Chloride Pumps

VALVE ADAPTER GUN

- Will attach to any calcium tire filling pump 1/2" female pipe thread
- Will extract valve core from a standard bore valve or core housing from tractor valve • Securely holds valve core or core housing up in the gun body during the filling or evacuation of liquid from tire







ASCOT NO. MFG. NO. DESCRIPTION

VALVE ADAPTER GUN PARTS			
464-00134	FP-134	Large Bore Core Remover	
464-00135	FP-135	Adapter For Standard Valve	
464-00136	FP-136	O-Ring For FP-135	
464-00137	FP-137	Standard Valve Core Remover	
464-00138	FP-138	Ejector Union With FP-136 O-Ring	
464-00139	FP-139	Gasket	
464-00140	FP-140	Stem	
464-00141	FP-141F	Adapter Body	
464-00142	FP-142	Stem Sealing Nut	
464-00143	FP-143	O-Ring For FP-142	
464-00144	FP-144	Hand Wheel	
464-00145	FP-145	Lock Nut	
464-00146	FP-146	Teflon Gasket	



CALCIUM CHLORIDE PUMP

- Now available with polyvinyl valve (Model #10509) or anodized aircraft aluminum valve (Model #10509M) • Pumps 34 gallons of calcium chloride per minute • Newly designed valve will not leak
- Spring reinforced hoses for fill and evacuate Comes complete with valve adapters for all valves (large bore and standard) • Gauges are protected • Unit is portable or can be mounted in tire service trucks
- Double diaphragm pump, 1 to 1 ratio 10' hoses gives plenty of room to operate • Includes hoses & calcium tire filled gun • USA MADE PUMP



ASCOT NO.	MFG. NO.	DESCRIPTION
475-10509	10509	Calcium Chloride Pump with Polyvinyl Valve
475-11590	10509M	Calcium Chloride Pump with Aircraft Aluminum Valve

GRACO CALCIUM CHLORIDE PUMP

• 50-gallon (189 liter) per minute capacity; 1 to 1 ratio double diaphragm pump • WEIGHT: 38 lb. (17.2 kg) • Pump only P/N 15091, pump with quick connectors 15090-Q



ASCOT NO. MFG. NO. DESCRIPTION 475-15090

15090 GRACO Calcium Chloride Pump





"WONDER PUMP" PNEUMATIC DOUBLE DIAPHRAGM CALCIUM CHLORIDE PUMP



- No lubrication required Self-priming; non-stalling; low noise level
- Diaphragms have no stress points and "less flex" for longer life
- No gradual loss of pump performance due to wear Can run dry indefinitely • Protected by an

air filter/regulator • 4-WAY VALVE: 1/4 turn reverses the flow







▲ WARNING: For more information go to www.P65Warnings.ca.gov.

ASCOT NO. MFG. NO. DESCRIPTION

"WONDER PUMP" PARTS & ACCESSORIES			
475-13011	30A-11	310 Calcium Gun	
475-13018	30A-18	3/4" Brass Quick Coupler-Hose Saver	
475-13019	30A-19	3/4" Brass Plug - Hose Saver (Needed for 30A-18)	
475-13021	30A-21	1/2" Brass Quick Coupler - Calcium Gun	
475-13022	30A-22	1/2" Brass Plug - Calcium Gun (Needed for 30A-21)	
475-13026	30A-26	1/8" Back Mount Air Gauge - 0-100 PSI	
475-13027	30A-27	2-1/2" Dia. S.S. 1/4" Back Mount Press/Vac Gauge - 30/0/150 Glycerin Filled	
475-82515	682515	Extra Large Exhaust Muffler	
475-13028	30A-28	3/4" Brass 4-Way Directional Valve w/ O-Ring Seals w/ Handle	
475-13029	30A-29	Handle for 30A-28	
475-13030	30A-30	10' Supply Hose (3/4" x 1" MPT Ends) 300 PSI - Wingfoot	
475-13031	30A-31	15' Fill/Evac Hose (3/4" x 1/2" MPT Ends) 300 PSI - Wingfoot	
475-13032	30A-32	PVC Suction Bypass Hose for Silver Pump	
475-13033	30A-33	1" FPT Stainless Steel Strainer for 30A-30 Prior to 2002	
475-13034	30A-34	3/4" FPT Stainless Steel Strainer for Current 30A-Plus	
475-12532	25A-32	PVC Bypass Hose for Black Pump	

Mount/Demount Tools



GOLDEN TOOL TUBELESS TRUCK TIRE MOUNT/DEMOUNT TOOL

• Demounts most tubeless tires in 8 seconds with ease - remount them in 20 seconds with equal ease - all without the need to lift tire and rim to remove rear bead • Demounts/mounts 17.5" to 44.5" tires • APPLICATIONS: Use on tubeless truck tires including super single/duplex tires, radial and bias • For Dayton-type wheels (centerless) and Budd type disc wheels • Eliminates the need to lift tire and rim to remove the bottom bead, preventing possible strain or even serious injury



ASCOT NO.	MFG. NO.	DESCRIPTION
448-00100	TNT-100	Tire Mount/Demout Tool Complete
448-00101	TNT-100-1	Demount Tool Only (17.5-31.5)
448-00200	TNT-200	Super Single Tire Mount/Demount Tool
448-00201	TNT-200D	Super Demount Tool (17.5-44.5)
448-00202	TNT200M	Single Mount Tool
448-00301	TNT-300-1	New 445 Super Single Demount Tool (17.5-X1)

MTP, Inc.

TUBELESS TRUCK TIRE DEMOUNT TOOL

• High Quality, economical price

QUALITY

- Nylon rollers
- 3-Step demount of 22.5 and 24.5 tires
- Parts Available



		DESCRIPTION
448-00400	EZT-100D	Tubeless Truck Tire Demount Tool

BL-100 BEAD LOCK

- Helps prevent bead damage Large roller directs bead into drop center, making tire mounting easier • Prevent damage to rims
- Tool will not slip or dislodge during the mounting process



DESCRIPTION ASCOT NO MFG NO 448-01100 BL-100 Bead Lock



STEEL TRUCK BEAD HOLDER

- Clamps securely to the wheel to prevent tire from "walking"
- Eliminates the use of vise grips which can damage wheels
- For use with automatic tire changers and/or manual tire changing tools • Heavy duty steel construction

ASCOT NO.	MFG. NO.	DESCRIPTION
448-00010	BJ-BP10	Steel Truck Bead Holder



GOLDEN BUDDY TIRE CHANGING SYSTEM

• Mount and demount tool assemblies for 22.5 & 24.5 tires/wheels • Heavy duty steel construction ensures long life • Nylon rollers protect the bead • Bead holder • WEIGHT: 32 lb. (14.5 kg) • Sold as a complete set

ASCOT NO.	MFG. NO.	DESCRIPTION
448-12320	71050	Golden Buddy Tire Mount/Demount Tool Set
448-22320	71051	Golden Buddy Dismount Assembly
448-32320	71052	Golden Buddy Mount Tool Assembly

EASY BUDDY TIRE DEMOUNT TOOL

• Mount and dismount tire assemblies for 22.5 and 24.5 tires/wheels • Easy-tofollow instructions • WEIGHT: 35 lb. (16 kg) • Includes top bead removal tool and bottom bead removal tool • Includes Rim Protector to prevent rim scarring

ASCOT NO.	MFG. NO.	DESCRIPTION
448-71000	71000	Easy Buddy Tire Demount Tool



Mount/Demount Tools (cont.)

ESCO

TRUCK TIRE DEMOUNT & MOUNTING TOOL KITS



ASCOT NO.	MFG. NO.	DESCRIPTION
402-90518	90518-100-KIT	ESC100 Kit - INCLUDES: 90518-100-1 Demounting Tool, 90518-200M Mounting Tool & 70141 Bead Holder
402-90519	90518-200-KIT	ESC200 Kit - INCLUDES: 90518-200-1 Demounting Tool, 90518-200M Mounting Tool & 70141 Bead Holder

UNIVERSAL DEMOUNT TOOL - HEAVY DUTY TIRE KIT

- Safe, simple, fast, economical, and the most universal tire demounting system on the market
- Works as a hand-held tire machine and shines where other tools fall short
- Tackles the hard 19.5 reverse hubs and grader tires and can be used on all tire sizes from 10" ATV tires and up
- Great for agricultural tires, one-piece grader, loader, forestry and backhoe tires



ASCOT NO.	MFG. NO
402-20415	20415

Universal Demount Tool - Heavy Duty Tire Kit - INCLUDES: 20408 Universal Demounter, 20404 52" Mounting Bar, 20403 35" Mounting Bar, 20406 Pair of HD Bead Holders

DESCRIPTION

TYR-X TRUCK TIRE DEMOUNT SYSTEM

• A safe, quick, and reliable tire demounting tool that makes tire demounting a simple process • The pivot hooks ensure easy and positive operation and its design eliminates aggressive stretching of the tire bead • One of the easiest and fastest manual truck tire demounting tool on the market • Works on standard truck tires (22.5-24.5) and can be used for the first

bead of super singles or double wide truck tires • WEIGHT: 17 lb. (8 kg)



ASCOT NO.	MFG. NO.	DESCRIPTION
402-20396	20396	Demount Tool, Truck Tire, "Tyr-X", All In One Demount System
402-20397	20397	Bead Wedge (Puts Tire In Drop Center)
402-20406	20406	Bead Holder, Commercial Truck Tires (Pair)
402-20430	20430	Mounting Bar, Truck Tires



Ken-Tool®

BLUE COBRA™ TRUCK TIRE **DEMOUNT TOOL**

· Ergonomic shaped steel handle with

no-slip grip for optimum leverage • APPLICATIONS: Change nearly any 20", 22.5" and 24.5" tube-type and tubeless truck tires, up to a 13" wide one-piece wheel

ASCOT NO.	MFG. NO.	LENGTH	WEIGHT
402-35440	35440	54"	22 lb.

TIRE MOUNT TOOL

- · Demounts both beads on most truck tires with the need for lifting the tire/wheel assembly off the ground and then dropping it
- · Heat-treated alloy steel for maximum durability and strength



TIRE MOUNT TOOL

• Wing shaped designed to stop against rim, remove itself from between rim and bead • Small end gets under stretched bead for last pull



SUPER SERPENT MOUNT TOOL

• It may seem funny looking, but every inch of this innovative design is purely serious • Delivers Twice the leverage of any "Straight-type" tire mounting tool



SUPER SERPENT DEMOUNT TOOL

- At only 5-1/2 pounds, this unique, lightweight demount tool for super singles can be lugged around on a fingertip
- Delivers incredible leverage right where it's needed



TIRE SPOONS

402-35440

• General purpose tire irons for all mounting and demounting needs • APPLICATIONS: Use 18" and 24" spoons to mount or demount passenger car, motorcycle, ATV and light truck tires: 30" spoons provide enough strength and leverage to work on large truck, bus, off-road vehicle, tractor and aircraft tires



ASCOT NO.	MFG. NO.	LENGTH	STOCK	WEIGHT
	A. S	TRAIGHT		
402-32101	T1X	18"	11/16"	1.8 lb.
402-32119	T19	24"	11/16"	2.5 lb.
402-33022	33022	30"	3/4"	3.4 lb.
402-33219	T19A	30"	11/16"	3 lb.
402-33238	T38	30"	7/8"	4.8 lb.
	B. DR	OP-CENTE	R	
402-02100	T21R	18"	11/16"	1.8 lb.
402-02101	T21F	24"	11/16"	2.5 lb.
402-02102	T21HD	30"	7/8"	4.5 lb.
402-33020	33020	30"	11/16"	3.1 lb.
402-33024	33024	30"	3/4"	3.4 lb.
	C.	CURVED		
402-31820	31820	18"	11/16"	1.8 lb.
402-32102	T2X	18"	11/16"	1.8 lb.
402-32120	T20	24"	11/16"	2.4 lb.
402-32420	32420	24"	11/16"	2.5 lb.
402-33021	33021	30"	11/16"	3.1 lb.
402-33052	33052	30"	3/4"	3.1 lb.
402-33062	33062	30"	7/8"	3.4 lb.





11/16"

7/8"

3.1 lb.

4.5 lb.

402-33220

402-33239

T20A

T39

30"

30'



Mount/Demount Tools (cont.)

IRONMAN™ ERGONOMIC WHEEL LIFTING BAR

- Easily and safely lift heavy, awkward truck tire and wheel assemblies
- Extremely useful in outdoor conditions when truck tire and wheel assemblies can become wet & slippery • Protect your workers and yourself: reduce injuries & claims, keep insurance premiums down • Specially designed forged ends work from either side of the wheel assembly as it lays flat
- APPLICATIONS: Lift all sizes and types of small and large heavy truck wheels: Standard sizes including 22.5" and 24.5" wheels, plus European (which have 1" lug holes), Super Wide and even the Super Single (a 340 lb. assembly) size





402-34950



The Ironman™ Ergonomic Wheel Lifting Bar in use.

ASCOT NO.	MFG. NO.	LENGTH	WEIGHT
402-34950	34950	58"	10 lb.

NINETEEN-FIVE™ TIRE MOUNTING & DEMOUNTING TOOL SET FOR 19.5" TRUCK TIRES

• New tire bar uniquely designed to work on hub side of wheel, where hub protrudes above rim • Specially designed ends manipulate tire with less effort • Forged from high-grade carbon steel and heat-treated for longlasting strength and durability • APPLICATIONS: Specially designed Bead Holder to hold bead on 19.5" aluminum wheels • Solid brass Bead Holder for steel wheels • Aluminum Wheel Protector - thick leather pad helps protect rims from marring and scratching





402-33196

402-33199

472-31713

DESCRIPTION ASCOT NO. MFG. NO. LENGTH WEIGHT NINETEEN-FIVE™ TIRE MOUNTING & DEMOUNTING TOOL SET 402-33195 and Demounting Set. INCLUDES: 31710, 31810, 33196, 33199 472-31710 31710 Bead Holder for 4-1/2" 25 lb Steel Wheels - Solid Brass 472-31810 31810 Aluminum 3.4 lb. Wheel Protector - Leather Bead Holder for 402-33196 33196 7-1/2" 3 lb. 19.5" Aluminum Wheels 402-33199 33199 Tire Mounting/ 38" 2.5 lb. Demounting

Tool

BEAD HOLDER

• Holds the bead in place against the wheel when mounting the tire on the wheel • 31713 Bead Holder works on Super Singles and Super Wides



ASCOT NO.	MFG. NO.	MATERIAL	STOCK	WEIGHT	
472-31710	31710	Solid Brass	1.4 lb.	1.8 lb.	
472-31713	31713	Aluminum Bead Holder - Works on Super Singles			

ALUMINUM WHEEL PROTECTOR

- Protects wheel rims from damage
- U.S. Patent No. 6,991,018

MFG. NO. ASCOT NO. WEIGHT 472-31810 31810 12 lb. (5.4 kg)







CLASSIC TUBELESS TIRE IRON

• Ken-Tool's patented designs offer one-piece construction and assure long life for many tire changing applications • Tip ends insert easily and will not cut or rip bead or sidewall . These designs make it easier to mount and demount tires without changing the way the tool is used • MOUNT END: Precision-forged knob grips rim. Tip designs won't slip during tire mounting. Special curve design always grabs the bead edge • DEMOUNT END: Precision-forged angled tip slides between bead and rim easily. Forged design won't slip when demounting the second bead





402-34645 MFG. NO. LENGTH STOCK WEIGHT ASCOT NO 402-34645 T45AC 37" 3/4" 4.6 lb. 402-34649 T45AS 52' 7/8 8.25 lb.

TUBELESS TIRE IRON SETS

MFG.

· Sets provide all irons necessary for a variety of tire changing applications • APPLICATIONS: Use C bar with the B extension bar for easier use on large, wide-base truck tires; Use on standard and large truck tires, including industrial, farm, buses and tractors

INCLUDES:

T47A, T47B, T47C

Ultra Duty

Mount/

Demount Iron

Mount/

Demount Iron

Offset Bar

For Deep

ASCOT NO.	NO.	DESCR.	LENGTH	STOCK	WEIGHT	
		ADAPTER PI	LUGS			
402-46000	T46	Tire Iron Set. INCLUDES: T46A, T46B, T46C	_	3/4"	12 lb.	
402-46001	T46A	Med. Duty Mount/ Demount Iron	36"	3/4"	4.5 lb.	
402-46002	T46B	Mount/ Demount Iron	36"	3/4"	4.5 lb.	\
402-46003	T46C	Offset Bar For Deep Well Tires	22"	3/4"	3 lb.	402-46001
		HEAVY				
402-47000	T47	Tire Iron Set.	_	1"	29 lb.	

52"

49-1/2"

1"

11 lb.

11 lb.

6.66 lb.

402-46003

▲ WARNING: For more information go to www.P65Warnings.ca.gov.

Small Mount/ **Demount Tools**

Design based on popular European styles. Extended length of the flat curved sliding surface provides comparable mounting ability of much longer traditional tire irons.

TIRE IRONS - SMALL TIRE

• Pro tire changing tools for small tires • APPLICATIONS: Ideal for mounting and demounting motorcycle, ATV, lawn, golf cart and small tires by hand • Rounded ends will not pinch tube



MOTORCYCLE/SMALL WHEEL TIRE TOOL

		4	02-04311		
ASCOT NO.	MFG. NO.	LENGTH	STOCK	WEIGHT	
402-04311	T43A	15"	3/4"	1.8 lb.	

EUROPEAN STYLE TOOLS

- APPLICATIONS: Use on car, motorcycle, truck and agricultural tires
- Designed for mounting and demounting tires Best if used in pairs





T47C

402-47001

402-47002

402-47003



Lock Ring Tools

TRUCK LOCK RING REMOVER

• APPLICATIONS: Designed for small diameter wheels



COMBINATION RIM/RING TOOL

• Flat tapered end • APPLICATIONS: Ideal for all around ring and rim work



RIM LOCK TOOL

• APPLICATIONS: For servicing wide base rims



SPECIAL LOCK RING TOOL

• Long tapered curved end • APPLICATIONS: For continuous side rings



LOCK RING TOOL

• APPLICATIONS: Removes continuous side rings on two-piece truck rims




HEAVY DUTY LOCK RING TOOL

• APPLICATIONS: Use for multi-piece wheels, especially hub type



INDUSTRIAL WHEEL LOCK RING TOOL SET

• Helps prevent injury, easier to keep hands safely outside of press cage • Bright orange color helps prevent lost tools

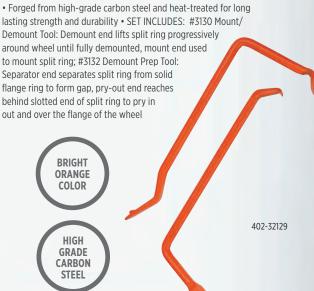

ASCOT	NO.	MFG. NO.	DESCRIPTION	LENGTH	WEIGHT		
INDUSTRIAL WHEEL LOCK RING TOOL SET PARTS					PARTS		
402-32	2130	32130	Mount/Demount Tool	15-3/4"	1.8 lb.		
402-3	2131	32131	Demount Prep Tool	15-1/2"	1.5 lb.		
ASCOT I	ASCOT NO. MFG. NO. DESCRIPTION						
402-32129 32129 2 Pc Industrial Wheel Lock Ring Set							



Heavy Duty Hammers



WOODEN HANDLE HAMMERS

• Used for mounting and demounting tires • APPLICATIONS: Makes tire changing easier for passenger car, truck, bus, farm tractor and aircraft tires





ASCOT NO.	MFG. NO.	HANDLE NO.	LENGTH	WEIGHT	
425-35321	T34	T11CH	17"	4.8 lb.	
425-35323	T35	T11CH	16-1/2"	5.5 lb.	
425-35325	T36	T11CH	16-1/2"	5.8 lb.	
425-35105	T34RH	Rubberhead Replacement			

▲ WARNING: For more information go to www.P65Warnings.ca.gov.

ASCOT NO.	MFG. NO.	HANDLE NO.	LENGTH	HEAD WEIGHT	WEIGHT	
425-35421	TG34	TG11CH	18"	5.5 lb.	6 lb.	
425-35423	TG35	TG11CH	18"	4.8 lb.	6.6 lb.	
425-35425	TG36	TG11CH	18"	5.8 lb.	6 lb.	



General Purpose Hammers & Wedges







36"

36"

36"

2-3/8"

1" x 1-3/8"

1" x 1-3/8"

2" x 1-1/2"

12 lb.

16 lb.

20 lb.





DUCK BILLED POLYMER HANDLED BEAD BREAKING WEDGE

 Hump design prevents tool from wedging between rim and bead • Breaks bead with little or no prying • New polymer handle design with fiberglass core

POLYMER HANDLE DESIGN

ASCOT NO.	MFG. NO.	HANDLE NO.	LENGTH	WEIGHT	
424-35460	T11K	T11KH	32"	10.5 lb.	
429-35230	T11KH	Replacement Handle for T11K			

2 LB. RUBBER MALLET

· Rubber head prevents marring surfaces

426-35310

ASCOT NO.	MFG. NO.	HANDLE LENGTH	WEIGHT
426-35310	T32	17"	2 lb.





84H-12

84H-16

84H-20

428-37312

428-37316

428-37320

E 4 Ken-Tool®



NEW ENGLAND PATTERN HAND-**DRILLING HAMMERS**



TIRE KNOCKER

ASCOT NO.	MFG. NO.	HANDLE LENGTH.	WEIGHT	426-35110
426-35110	35110	18"	7 lb	

DEAD BLOW HAMMERS

- · Economy version for DIYers or home workshops
- One-piece polypropylene outer jacket provides a lifetime of use • Head is shot-filled for

maximum force with no bounce effect

ASCOT NO. MFG. NO. LENGTH WEIGHT 426-35335 12" 1.5 lb.

PROFESSIONAL DEAD **BLOW HAMMERS**



426-35332

Replacement Handles



FIBERGLASS REPLACEMENT HANDLE FOR DUCK-BILLED BEAD BREAKING WEDGES

· Handles are constructed with a solid core which has thousands of fiberglass strands and a unique resin making them super strong all-weather, chemical and insect-resistant • Ergonomic non-slip grips for slippery conditions • Replacement Adapters available • MADE IN THE USA



429-35229

MFG. NO. DESCRIPTION ASCOT NO. TG11EH 32" Fiberglass Hammer Handle 429-35229

FIBERGLASS REPLACEMENT HANDLES

ASCOT NO.	MFG. NO.	FOR HAMMER NO.	LENGTH	WEIGHT
429-35206	TG31H	TG11R, TG31, TG33R	16"	1 lb.
429-35211	TG11BH	TG11B	16"	1.3 lb.
429-35219	TG11CH	TG11C, TG34, TG35,TG36	18"	2.5 lb.
429-35218	TG11DH	TG11D	18"	1.2 lb.
429-35832	TG11EH	TG11E	32"	2.3 lb.

ALUMINUM REPLACEMENT HANDLES

ASCOT NO.	MFG. NO.	FOR HAMMER NO.	LENGTH	WEIGHT
429-35529	T11AH	T11E, TG11E	32"	4.3 lb.

HICKORY REPLACEMENT HANDLES

	-		10000	- 1-1-1-1
ASCOT NO.	MFG. NO.	FOR HAMMER NO.	LENGTH	WEIGHT
429-35111	T11BH	T11B	15"	.75 lb.
429-35113	T11HN	T11R, T31, T33R	15"	.75 lb.
429-35119	T11CH	T11C, T34, T35, T36	17"	.75 lb.
429-35127	T11DH	T11D	17"	.75 lb.
429-35129	T11EH	T11E	30"	1.2 lb.



426-35310



Wrenches & Lug Wrenches

Ken-Tool



· Holds outer cap nut on dual wheels while turning inner nut • Lip fits in hole to secure wrench in place • Fits standard and metric cap nuts



ASCOT NO.	MFG. NO.	DESCRIPTION	SIZE	WEIGHT
406-30609	TX9	SAE	1-1/2"	.4 lb.
406-30610	TX10	Metric	35mm	.4 lb.
406-30612	TX12	Metric	41mm	.4 lb.

COMBINATION CAP NUT WRENCHES

· Combination wrench offers you the versatility of two wrenches in one • Fit one end onto the outer cap nut with other end through center hole • Slides underneath center disc of wheel reducing slipping during nut removals





ASCOT NO.	MFG. NO.	DESCRIPTION	SIZE	WEIGHT
406-30620	TX50	SAE & Metric	41mm	1.3 lb.

HEAVY DUTY NUT WRENCHES

• Heavy duty design will not slip out of position • Rests snugly against the center hole reducing the possibility of rim damage • Great for aluminum rims





406-30618

ASCOT NO.	MFG. NO.	DESCRIPTION	SIZE	WEIGHT
406-30618	TX200	SAE	1-1/2"	2.6 lb.
406-30619	TX241	Metric	41mm	2.6 lb.



HANDS FREE BUDD NUT WRENCHES

· Eliminates the need for hand and foot aid in separating the nuts, therefore reducing needless injury • Reduces the work and potential for back strain because there is no need to lay down the tire • Will not lose its grip on the outer cap nut so there is no loss of torque, which will give the impact wrench maximum power and efficiency



The Budd Nut Wrench in use.





ASCOT NO.	MFG. NO.	DESCRIPTION
406-60300	60300	Budd Nut Wrench

BUDD NUT WRENCHES

• New design won't slip out of rim hole

• Will not damage aluminum/ chrome rim • Holds outer cap nut securely • This adaptation of an old product solves the problem of damage to wheels, as well as

broken toes and injuries to the feet • Model 60301 has a replaceable polymer covered tail that locks the tool securely in place



406-60303

ASCOT NO.	MFG. NO.	DESCRIPTION
406-60301	60301	Budd Nut Wrench
406-60302	60302	Budd Nut Wrench - 35mm
406-60303	60303	Budd Nut Wrench - 41mm
406-60908	60908	Replaceable Polymer Tail





E 4 Ken-Tool®

HEAVY DUTY TRUCK WRENCHES

• Use for off-the-road Budd-type wheels • Use TR11 handle



DOUBLE END TRUCK WRENCHES

• Double end truck wrenches for on-the-road service • Sizes available for all standard lug nuts • Constructed from 1" high quality steel for greatest strength and durability • All will take our standard TR5 (ASCOT Order No. 405-32318) leverage handle • HANDLE HEX OPENING: 3/4" • LENGTH: 16"; WEIGHT: 4-1/2 lb.



POWER WRENCH

• Designed for dual nut systems • Has 13/16" square end to hold inner nut, with a 1-1/2" hex drive to spin outer nut off



▲ WARNING: For more information go to www.P65Warnings.ca.gov.





The Budd Wheel Set in use.

ASCOT NO.	MFG. NO.	DESCRIPTION
404-34543	TR43	BASIC SET INCLUDES: Power Drive And Two Handles (Solid Bar - 20- 1/2" Long And Tube - 20" Long)
404-34545	TR44X	BUDD WHEEL SET INCLUDES: Power Drive, One Bar, One Tube Handle, A 3/4" Service Adapter And One 13/16" Square Adapter
404-34547	TR44SW	UNIVERSAL SET INCLUDES: Power Drive, One 20-1/2" Bar, One 36" Tube Handle, A 3/4" Service Adapter, A 13/16" Square Adapter, And Six 3/4" Impact Sockets (7/8", 15/16", 1-1/16", 1-1/8", 1-3/16", 1-1/2")

402-32508

ASCOT NO.	MFG. NO.	SOCKET SIZE	WEIGHT
		SAE	
405-32501	TR1	1-1/8", 13/16" Square, 1-1/2"	4.6 lb.
405-32502	TR2	1, 1-1/4", 5/8" Square	4.3 lb.
405-32504	TR2X	15/16", 7/8"	4.5 lb.
405-32503	TR3	7/8", 1-1/16"	4.5 lb.
405-32505	TR3A	1-1/8", 1-1/16"	4.5 lb.
405-32506	TR3X	1-1/16", 1-3/16"	4.5 lb.
405-32509	TR9	1-1/4", 1-1/16"	4.5 lb.
405-32508	TR98	1-1/2", 13/16" Square	4.5 lb.
		METRIC	
405-32551	TRM1	35mm Sq. x 17mm Square	4.5 lb.
405-32552	TRM2	24mm x 33mm	4.4 lb.
405-32553	TRM3	27mm x 30mm	4.5 lb.
405-32556	TRM6	41mm x 21mm Square	4.5 lb.
405-32557	TRM7	33mm x 30mm Square	4.5 lb.

DUAL WHEEL LUG STUD REMOVER

• Special self-tapping splines provide maximum grip to remove stripped lug studs • Use with TR1 and TR98 truck wrenches • Also used with open end wrench • Use with soft-faced hammer





ASCOT NO.	MFG. NO.	DESCRIPTION	WEIGHT
492-30165	30165	Fits 13/16" Sq. Inner Nut	1 lb.



Wrenches & Lug Wrenches (cont.)

STOW & GO™ 4-WAY HD LUG WRENCH

• The Stow & Go™ 4-Way HD Lug Wrench folds to save space in your trunk and locks into place for easy use • Push button in center allows wrench to fold after use • Sliding arms give extra leverage for removing lug nuts • Made of heavy duty and durable alloy steel • 17mm, 19mm, 21mm sockets, and 1/2″ square drive adaptor to be used with other sockets • 16″ in length



ASCOT NO. MFG. NO. DESCRIPTION

403-35636 | 35636 | Stow & Go™ 4-Way HD Lug Wrench

HEAVY DUTY TRUCK FOUR-WAY LUG WRENCHES

• Drop-forged center • APPLICATIONS: Heavy duty truck, bus, tractor fourway • Center hole for leverage bar • T96 with heavy duty solid center



ASCOT NO.	MFG. NO.	LENGTH	STOCK	SOCKET SIZE	WEIGHT
403-35595	TC95	27-1/2"	1"	1-1/2", 13/16" Sq., 30, 33mm	14.2 lb.
403-35695	T95	27-1/2"	1"	1-1/16", 1-1/4", 1-1/2", 13/16" Sq.	13.8 lb.
403-35696	Т96	27-1/2"	1"	1-1/16", 1-1/4", 1-1/2", 13/16" Sq.	13.5 lb.
403-35697	T95A	27-1/2"	1"	1-1/4", 1-1/2", 13/16" Sq., 3/4" Service Arm (will take any standard 3/4" drive socket)	13.5 lb.
403-35795	TM95	27-1/2"	1"	24, 27, 30, 33mm	13.5 lb.

Ken-Tool®

LUG WRENCHES

- Most popular 4-way lug wrench, polished sockets
- Welded center construction for strength and durability
- Premium grade bar quantity steel



ASCOT NO.	MFG. NO.	LENGTH	STOCK	SOCKET SIZE	WEIGHT		
		PRO	DFESSIONAL				
403-35656	T56	20"	5/8"	17, 19, 21, 22mm	4 lb.		
403-35657	T57	23"	5/8"	3/4", 13/16", 7/8", 15/16"	4-1/2 lb.		
STANDARD							
403-35659	T59	22"	5/8"	3/4", 13/16", 7/8", 15/16"	4.5 lb.		
405-35690	Т90	25"	3/4"	7/8", 15/16", 1", 1-1/16"	7.2 lb.		
		E	CONOMY				
403-35620	T9520	20"	9/16"	3/4", 13/16", 7/8", 17mm	3.4 lb.		
403-35661	T61	22"	9/16"	3/4", 13/16", 7/8", 17mm	3.8 lb.		
403-35662	T62	18"	9/16"	3/4", 13/16", 7/8", 17mm	3.2 lb.		
403-35663	T63	18"	9/16"	17, 19, 21, 22mm	3.2 lb.		



Shop Service Tools

WHEEL COVER PULLERS/REPLACERS

- Remove wheel covers quickly and easily without gouging or scratching
- Rubber head T11RH prevents damage to hubcab and is replaceable



ASCOT NO.	MFG. NO.	LENGTH	STOCK	WEIGHT
402-31567	T67	17-1/2"	9/16"	1.8 lb.
402-31568	T68	14"	7/16"	1.3 lb.

CENTER CAP REMOVERS



ASCOT NO.	MFG. NO.	LENGTH	STOCK	WEIGHT
402-31565	T65	7-3/4"	5/16"	.2 lb.
402-31566	T66	7-3/4"	5/16"	.2 lb.

Ken-Tool®

SMALL TIRE SNAKE

• Included with T600 Tire Changer

			402-3467	2
ASCOT NO.	MFG. NO.	LENGTH	STOCK	WEIGHT
402-34672	34672	22"	5/8"	2 lb.

MEDIUM TIRE SNAKE

• Included with T601 Tire Changer • APPLICATIONS: Designed for wheels from 4" to 13" • Longer length provides greater strength



LARGE TIRE SNAKE

• Included with T600 Tire Changer



SHARK FIN DUAL WHEEL SEPARATION BAG

• The first wheel separation solution for steel, aluminum and chrome wheels • No metal on metal contact • 5000 lb. of static pressing force • Works on 15" to 24.5" dual and single wheels and tires

on trucks & trailers • Kevlar inner inflation bag is industrial grade and nearly puncture proof • SMALL BUT MIGHTY: Portable, durable, and fast • Full inflation only takes a matter of seconds • 3-foot inflation hose makes access easy and safe • Deflation is controlled with a quick turn of the slotted valve cap • 9.75" x 8" x 3/8" height deflated, 5.5" height when fully inflated • 90 psi max pushing pressure, 150 psi maximum rated pressure



NO METAL ON METAL

CONTACT

ASCOT NO.	MFG. NO.	DESCRIPTION
429-36455	364555	Shark Fin™ Dual Wheel Separation Bag



TIRE & WHEEL SERVICE



DUAL WHEEL SEPARATOR

· Makes removing stuck or frozen dual steel wheels quick and easy • Ideal for use on nearly any truck, bus, van or trailer with dual steel wheels • Innovative "one-piece" pusher won't fall apart during use • Forcing screw and pullers have powerful 1-1/8" diameter x 7 threads for years of reliable service • Pusher is ball bearing-driven for near-zero turning resistance • Pusher is heat treated for long-lasting strength and durability • Includes two pullers to cover large truck, trailer and smaller light truck dual wheel applications • Use

BENCH MOUNT RIM-CLAMP MANUAL TIRE CHANGER

• APPLICATIONS: Mounts and demounts a full range of tires on rim diameters from 4" to 12" • Mounts easily to a bench or in any standard, four-position rim-clamp tire changer • Built-in, three-fin centering device mounts standard lug-type rims with 2" and larger center hole • Square base prevents turning in the changer during use • Includes a 22" tire snake mount/demount tool (Ascot # 402-34672)





ASCOT NO. DESCRIPTION MFG NO 422-94549 ASC94549 Dual Wheel Separator

E 4 Ken-Tool[®]

DUAL WHEEL SEPARATOR

· Makes removing stuck or frozen dual steel wheels quick and easy

· APPLICATIONS: Ideal for use on nearly any truck, bus, van or trailer that has dual steel wheels • WEIGHT: 6.5" x 9.5" x 2.5", 5.3 lb.

MADE IN USA



ASCOT NO. 422-34549

MFG. NO. 34549

DESCRIPTION **Dual Wheel Separator** **E E Ken-Tool**[®]

MFG. NO.

T600

ASCOT NO.

441-38600

FLOOR MOUNT MANUAL TIRE CHANGER

HEIGHT

16.5'

WEIGHT

21.7 lb.

• APPLICATIONS: Mounts and demounts a full range of tires on rim diameters from 4" to 15" • Tapered bearing guide positively centers straight shaft hubs of all diameters • Built-in adjustable bead breaker works on rims up to 13" in diameters and 24" in width without disassembly • Includes a 28" tire snake mount/demount tool (Ascot # 402-34674)



32"

ASCOT NO. MFG. NO. 441-38601 T601

HEIGHT

WEIGHT 31 lb.



Shop Service Tools (cont.)

TRUCK WHEEL & RIM REMOVAL TOOL

• The easiest & quickest way to loosen stubborn, locked up rims • Retire that backbreaking 20 lb sledge that you use to break seized rims apart • Eliminate damaged tire side walls and rims • Fits all standard (22.5 and 24.5) semi truck rims; aluminum or steel • Safe and efficient

422-71650



ASCOT NO.	MFG. NO.	DESCRIPTION
422-71650	71650	RIMWIT - Truck Wheel & Rim Removal Tool - Fits Standard 22.5 & 24.5 Wheels
422-71655	71655 RIMWIT JR- Truck Wheel & Rim Removal Tool - Fits 19.5" Wheels	



MANUAL TIRE CHANGER & OPTIONAL BASE PLATE

• Small tire changing system for lawn & garden, ATV and other small tires/wheels

Not for passenger tires

Adjustable to accomodate multiple tire/wheel sizes

• High quality, energy saving & environmentally friendly

• Portable and equipped with professional accessories

· Can be operated easily without the use of power or pneumatic supplies

· Works for an impressive range of tires

• Great for family and commercial garages, racing teams, emergencies and any time a convenient changer is required

ASCOT NO.	MFG. NO.	DESCRIPTION
441-00202	BJ-CO2	Manual Tire Changer
441-00002	BJ-CO2-BASEPLATE	Optional Base Plate for Manual Tire Changer



MANUAL TIRE **CHANGING SYSTEM**

• APPLICATIONS: For changing small tires and wheels

• INCLUDES: Everything needed to change 4" to 16.5" tires including rim • Rim clamp mechanism • 2 center posts (for open or hub type wheels and bearing type wheels) • Also includes the CH-4 Mongoose tire tool

· Can be mounted on a bench, tire stand or tire changer

ASCOT NO.	MFG. NO.	HEIGHT	
441-00220	CH-22	Manual Tire Changer	
441-00230	CH-23	Tire Changing Stand	

WEIGHT 23 lb.



TIRE & WHEEL SERVICE

441-00220



Shown with Optional Base Plate (441-00002)





Automatic Tire Inflation Systems

All systems feature an operating range of 5-145 PSI, accurate within 0.3 PSI. Units are housed in weather resistant aluminum casings. All provide an easy to use and affordable way to assure precise inflation. Units available with 110 volt AC electric or battery hook up. Optional heater available for outdoor units. Custom faceplates with corporate logo and color available. Can be hardwired and mounted to mobile service trucks. Systems confirm calibration every six minutes when in use and everytime they are powered on. INTERNATIONAL PROTECTION RATING: IP66, provides complete weather protection (except submersions). Automatically inflates or deflates to target PSI when attached to tire position. All systems can be programmed to specific PSI parameters to help organizations better manage consistent and accurate tire inflation. Wirelessly recieves/transmits gauged and corrected pressure via Bluetooth, Zigbee, or hardwired to PC. Designed to be operated with specific Haltec air chucks. NITROGEN COMPATIBLE: PSI is PSI, accuracy is main goal. All systems allow technician remote control of inflation/deflation process, keeping themselves out of "blast zone" of tire.

SINGLE TIRE INFLATOR

 Ideal for vehicle service centers, automobile dealerships and rental facilities • 1/4" inlet/outlet
 OPERATING RANGE: 5-145 PSI



ASCOT NO. MFG. NO. DESCRIPTION

475-89001

475-89001 89XDA Single Tire Inflation System

HIGH VOLUME TIRE INFLATOR

For Fleet Operations,
 Service Centers, or Mounters
 APPLICATIONS: For 19.5"
 and larger rims
 Capable of inflating four 22.5" tires from

5 to 100 PSI in 5 minutes

ASCOT NO. MFG. NO. DESCRIPTION
475-89003 89XDB High Volume Tire Inflator



OVER INFLATION & HIGH VOLUME INFLATION SYSTEM

- For Retreaders, Fleets or Mounters
- Inflate single or multiple tires to a preset over-pressure setting • Unit then performs a leak test for "zipper leaks"
- Deflates to final preset required PSI setting Features 3 preset PSI settings



3 PRE PS SETTII	i	
	SI	NFLATE NGLE OR ULTIPLE TIRES



ASCOT NO. MFG. NO. DESCRIPTION

475-89004 89 XDZ Over Inflation & High Volume System

SINGLE TIRE INFLATION HOSES & ACCESSORIES



ASCOT NO.	MFG. NO.	DESCRIPTION
475-00896	SVL-STD	4' Mounting Steel Swivel Stand
475-01892	89HKC-L	Straight Hose w/Coupler & CH3600P Chuck
475-01893	89HKC-LC	Coil Hose w/ Coupler and CH-3600P Chuck
475-01894	89HKT-L	Straight Hose w/Coupler & CH 330-LO-OP Chuck
475-01895	89HK1-25	Straight Hose w/Coupler & IN-20 Tool
475-01896	89-2 WASV	2 Way Automatic Switching Valve (2 Hoses)
475-01897	89-3 WASV	3 Way Automatic Switching Valve (3 Hoses)
475-01898 89-3 WTK 3 Way Automatic Switching Valve Kit		3 Way Automatic Switching Valve Kit
478-00820	IN20	Core Removal and Inflation Tire Chuck

Specify Hose length when ordering. Components available separately.



Automatic Tire Inflation Systems (cont.)

MULTIPLE TIRE INFLATION HOSES & ACCESSORIES



ASCOT NO.	MFG. NO.	DESCRIPTION
478-00360	CH-360S	Chip-On Style Air Chuck (Closed) w/Spring
475-00891	89HKC-LM	Straight Hose w/ CH-360S Air Chuck
475-00892 89HKT-LM		Straight Hose w/Coupler & CH-330-LO Air Chuck
475-00893 89HKI-25		Straight Hose w/Coupler & IN-20 Tool (Single Tire)
475-00894 89-HMVN		4-Way Manifold
475-00895 89-3W		Air Flow Control Valve
475-00896 SVL-STD		4' Mounting Steel Swivel Stand
478-03300	CH-330-L0	Lock-On Style Air Chuck (Dual Wheels)

MULTIPLE TIRE INFLATION SYSTEM (3-WAY)

• Inflates up to three wheels simultaneously at a 5-145 PSI pressure • Semi-pneumatic locking swivel wheel • Colorcoded 0.25" inflation hose • 1/2" and 3/8" inlet/outlet • Suitable for use with standard or large bore valves and core extraction tools • Inlet pressure gauge • Dual LCD screens indicate gauged and targeted pressure



ASCOT NO. MFG. NO. 475-89103 89MTIS-3DS

Multiple Tire Inflation System (3-Way)

▲ WARNING: For more information go to www.P65Warnings.ca.gov.



ASCOT NO. MFG. NO. DESCRIPTION 11.0623NA 4-Way Inflator Kit

4-WAY INFLATOR ACCESSORY BLOCK

- •Lightweight aluminum manifold splits air lines into (4) separate lines
- Slide valve turns air on/off to start inflation
- (4) 1/4" universal quick couplers allow for any type fitting
- 3' whip hose



ASCOT NO. DESCRIPTION

477-11624 4-Way Inflator Accessory Block



Safety Inflation Cages

A safety inflation cage is mandatory in any shop for tubeless and multi-piece rims. Ascot offers a size and design for all your needs. Constructed of heavy gauge steel welded to a steel base. Guards against blown lock rings, exploding rims and ruptured tire explosions when used properly. These cages meet OSHA safety requirements (29-CFR Part 1910.177).



BRANICK SAFETY INFLATION CAGES

• Constructed of heavy gauge steel welded to a steel base • No-mar wheel protection available • Multiple sizes for passenger and commercial locations • Side mesh option provides complete protection • Arch design for maximum energy displacement • These cages meet OSHA safety requirements (29-CFR Part 1910.177)





ASCOT NO.	MFG. NO.	DESCRIPTION	MAX. HEIGHT X MAX. TIRE WIDTH	DIMENSIONS	WEIGHT		
		2-BAR SAFETY INFLATIO	N CAGES				
479-02220	2220	Portable 2-Bar Safety Cage	54" x 21.5"	28" W x 17" D x 60" H	76 lb.		
		3-BAR SAFETY INFLATIO	N CAGES				
479-02130	2130	3-Bar Passenger/Light Truck Cage	34" x 21.5"	28" W x 20" D x 40" H	120 lb.		
		4-BAR SAFETY INFLATIO	N CAGES				
479-02240	2240	4-Bar Safety Cage with No Mar Coating	54" x 21.5"	28" W x 28" D x 60" H	170 lb.		
	6-BAR SAFETY INFLATION CAGES						
479-02260	2260	6-Bar Safety Cage	59" x 29"	35" W x 41" D x 62" H	385 lb.		



Work safely. Always use an inflation cage when inflating tires.
Follow OSHA regulation 29-CFR Part 1910.177 whenever changing tires.





MARTINS SUPPLY SAFETY **INFLATION CAGES**

- A safety inflation cage is mandatory in any shop for tubeless and multi-piece rims and Ascot offers a size and design for all your needs
- Constructed of heavy gauge steel welded to a steel base • Guards against blown lock rings, exploding rims and ruptured tire explosions when used properly • These cages meet OSHA safety requirements (29-CFR Part 1910.177)







HEAVY **GAUGE**

STEEL



4-BAR



ASCOT NO. MFG. NO. DESCRIPTION		HANDLES TIRES	DIMENSIONS	WEIGHT					
	2-BAR SAFETY INFLATION CAGES								
479-36001	MIC-2	Portable 2-Bar Safety Cage	Up to 48" OD X 13" W	21-1/2" x 16-3/4" x 51"	69 lb.				
479-36011	MIC-2WB	Portable 2-Bar Safety Cage (Super Single)	Up to 48" OD X 21" W	29" x 16-3/4" x 52"	78 lb.				
479-36201	MIC-2G	Galvanized Portable 2-Bar Safety Cage	Up to 48" OD X 13" W	21-1/2" x 16-3/4" x 51"	69 lb.				
479-36211	MIC-2WBG	Galvanized Portable 2-Bar Safety Cage (Super Single)	Up to 48" OD X 21" W	29" x 16-3/4" x 52"	78 lb.				
		3-BAR SAFETY INFLATI	ON CAGES						
479-36006	MIC-3	3-Bar Safety Cage	Up to 47" OD X 19" W	22-1/4" x 26-1/4" x 57-5/16"	108 lb.				
479-36013	MIC-PCR	3-Bar Passenger-SUV Safety Cage	Up to 35" OD X 12.5" W	21" x 28" x 40"	93 lb.				
		4-BAR SAFETY INFLATI	ON CAGES						
479-36002	MIC-4	4-Bar Safety Cage	Up to 47" OD X 19" W	31-5/8" x 26-1/4" x 57-5/16"	147 lb.				
	5-BAR SAFETY INFLATION CAGES								
479-36005	MIC-5	5-Bar Safety Cage	Up to 47" OD X 19" W	41" x 26-1/4" x 57-5/16"	182 lb.				
479-36015	MIC-OTR	OTR 5-Bar Safety Cage	Up to 62" OD X 33" W	41" x 39-3/8" x 66"	277 lb.				

Work safely. Always use an inflation cage when inflating tires. Follow OSHA regulation 29-CFR Part 1910.177 whenever changing tires.

▲ WARNING: For more information go to www.P65Warnings.ca.gov.



TIRE & WHEEL SERVICE

K4Ken-Tool®

KEN-TOOL® SAFETY INFLATION CAGES

- Constructed of heavy gauge steel welded to a steel base
- Guards against blown lock rings, exploding rims and ruptured tire explosions when used properly
- These cages meet OSHA safety requirements (29-CFR Part 1910.177)





479-36003









ASCOT NO.	MFG. NO.	DESCRIPTION	HANDLES TIRES	BASE PLATE	INSIDE HEIGHT	INSIDE DIMENSIONS	WEIGHT
2-BAR SAFETY INFLATION CAGES							
479-46001	36001	2-Bar Safety Cage	_	7" x 21-1/2"	41"	41" H x 16" W	60 lb.
479-46011	36007	2-Bar Wide Base Safety Cage	_	7" x 27"	43.5"	43.5" H x 20.5" W	72 lb.
3-BAR SAFETY INFLATION CAGES							
479-36003	T103	3-Bar Safety Cage/Light Truck Cage	_	21-1/2" x 22"	30"	30" H x 16" W	80 lb.
479-36004	T104	3-Bar Safety Cage for Off Road	_	30" x 27"	65"	65" H x 24" W	158 lb.
479-46006	36006	3-Bar Tire Inflation Cage	_	31.5" x 26"	43.5"	43.5" H x 20.5" W	146 lb.
4-BAR SAFETY INFLATION CAGES							
479-46002	36002	4-Bar Safety Cage	_	31.5" x 26"	43.5"	43.5 H x 20.5 W	146 lb.
5-BAR SAFETY INFLATION CAGES							
479-46005	36005	5-Bar Safety Cage	_	41" x 26"	43.5"	43.5" H x 20.5" W	182 lb.
479-46010	36010	5-Bar Super Magnum	_	48" x 30"	41.5"	41.5" H x 24" W	248 lb.



Work safely. Always use an inflation cage when inflating tires.
Follow OSHA regulation 29-CFR Part 1910.177 whenever changing tires.



Safety Inflation Cages (cont.)



TRUCK TIRE CHANGING STAND

• APPLICATIONS: Handles wheels or open rims 16.5" to 24" • Double-slide adjustment with locking device prevents twisting so it stays aligned with the wheel or rim • Ideal height for driving off beads or demounting tire



EZ TIRE ROTATOR FOR INFLATION CAGES

• APPLICATIONS: EZ Tire Rotator fits any Ken-Tool 3-Bar, 4-Bar and 5-Bar Inflation Cage, plus many competitive cages • No need to lift or remove rim/wheel assembly from cage when repositioning valve stem for access through the cage tubes • Allows tire tech to easily and quickly rotate rim/wheel assembly inside the safety cage in order to adjust position of valve stem • Reduces handling, back strain and user fatigue; increases safety • Easily installed or moved to another cage - no fastening required • No assembly required; simply place in the center of the cage • Features heavy-duty 2" ball-bearing steel rollers and ¼" thick steel stock for long service • Boxed and UPS shippable • MADE IN USA



WARNING: For more information go to www.P65Warnings.ca.gov.

ASCOT NO. MFG. NO. DESCRIPTION 479-36014 T114 EZ Tire Rotator for Inflation Cages



ROLLER FOR TIRE INFLATION CAGES

- Used to roll the tires easily directly into the inflation cage Allows an easy access to the tire valve because it is easy to turn the tire to have the valve to any position • For use with all 3-bar, 4-bar & 5-bar inflation cages
- Prevent back injuries when handling heavy tires WEIGHT: 12 lbs.



ASCOT NO. MFG. NO. DESCRIPTION

479-36111 MIC-ROLLER Roller for Tire Inflation Cages

TIRE CAGE STAND FOR AUTOMATIC INFLATORS

• Used to support automatic inflators to tire inflation cages • Reduces movement and allows for faster inflation of tires • Install directly on the top of one of the inflation cage bars with the mounting bracket • WEIGHT: 8 lbs.



ASCOT NO. MFG. NO. DESCRIPTION

MW-STAND Tire Cage Stand for Automatic Inflators 479-36112





TPMS Tools & Sensors

TPMS Accessories & Kits

TPMS Tools

TPMS Transmitters

Aftermarket Accessory Kits

Tire Valves

Truck & Specialty Valves

Valve Caps, Cores & Extensions

Special Application Products

Large Bore Extensions

Valve Hardware Tools

Tire Gauges

Inflator Gauges

AUTEL MAXITPMS

END PAGE 14.SE

DIGITAL TIRE REGISTRATION - DOT COMPLIANT



- 1. Select "TIRE REGISTRATION" on the ITS600 Main Screen
- 2. Select the Tire Manufacturer
- 3. Type in the DOT Number in Correct Format and the Quantity
- 4. Tap "SUBMIT" and You're All Set!

Mass TPWS



R 588F5E1 240 433 26.7

R 588F3E0 240 433 26.7

R 588F3E0 240 433 26.7

P 588EBDC 240 433 26.7

Check MX-Sensor Trioger

Check MX-Sensor Trigger

POWERED BY AUTEL DIAGNOSTICS

AVOID NON COMPLIANCE FINES BY USING DIGITAL CIMS TIRE REGISTRATION ON THE ITS600!

PLUS

PERFORM TPMS DIAGNOSTICS SENSOR PROGRAMMING VEHICLE RELEARNS



In case of a recall, we can reach you was have your name and address. You will send in this card to be on our recall list, send in this card to be on our recall list. To Mail: Affix Postcard Stamp to Reverse 5

Quetomer's Name (Please Print)

Seller Complete (Can be Rub

AUTEL









AUTEL

MX-Sensor 1 SENSOR

COMBINE BOTH FREQUENCIES 315MHZ + 433MHZ



99 WEHICIE COVERAGE

ALUMINUM



ORIGINAL EQUIPMENT FIT FORM & FUNCTION



PROGRAMMABLE UNIVERSAL TPMS



1-SKU SENSOR Inventory



MAX SIGNAL STRENGTH



SUPERIOR BATTERY LIFE

COMBINES 314.9, 315 & 433MHZ APPLICATIONS INTO ONE SENSOR

POWERED BY DIAGNOSTICS





UPDATES POWERED BY AUTEL DIAGNOSTICS



ITS600 DIAGNOSTICS & SERVICE

- 5.5" Touchscreen Tablet with Android 9.0 OS
- Optical Scanner Identifies VIN / MMY

TS508 TPMS SERVICE TOOL

- 4 MX-Sensor Programming Methods
- Exclusive TPMS Status Screen











AUTEL





AUTEL MAXITPMS ITS600 SERVICE TOOL

- New tablet style TPMS tool
- Optical scanner identifies VIN/MMY
- Exclusive TPMS status screen
- Fast OBD II relearn for most US domestic vehicles
- Copy by OBD sensor programming for faster service
- Batch program up to 20 Autel 1-Sensors
- Activate, read, relearn all known TPMS sensors
- Wireless OBDII connection via Bluetooth VCI
- Tire pressure placard value reset
- Read/clear codes & view all system live data (with Pro Upgrade)
- Includes 4 commonly used maintenance service
- FREE Wi-Fi software updates for the life of the tool
- 5.5" Touchscreen (1280 x 720) / Android 9.0 / 8MP camera
- On-Tool Tire Expiration Notice / Tire Recall Lookup / Scan DOT





Tool Only

469-60000

ASCOT NO. MFG. NO.		MFG. NO.	DESCRIPTION
469-600	00	ITS600	Autel ITS600 MaxiTPMS Diagnostic Tool
469-600	12	ITS600K12	Autel ITS600K12 MaxiTPMS Tool & (12) 1-Sensors
469-600	24	ITS600K24	Autel ITS600K24 MaxiTPMS Tool & (24) 1-Sensors




AUTEL

AUTEL TBE200 TREAD DEPTH MEASUREMENT TOOL

- 1.65" AMOLED super retina touchscreen
- 1 Megapixel Macro Camera, 8 Megapixel Zoom Camera
- · Tire Tread Depth/ Brake Disc Wear Measurement
- No Need To Remove The Wheel During Measurement
- Laser Measurement with 0.1mm Accuracy
- Real-Time Measurement Data on Touchscreen
- Full Tread Measurement / Quick Check
- Measurement Data Curve Display/ Uneven Wear Analysis
- Detailed Replacement & Maintenance Suggestions
- Test Detail For Single Tire Tread / Brake Disc
- Tire Expiration Notice / Tire Recall Lookup / Scan DOT (COMING SOON)
- · Take Photos of Tire Wear & Damage
- · Calibration Plate Included
- Compatible with Autel ITS600
- · Tire Health Report QR Code for easy sharing





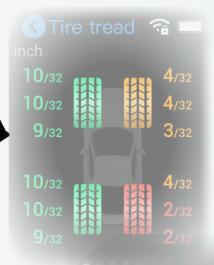



TBE200 INTELLIGENT LASER MEASUREMENTS



TIRE TREAD DEPTH MEASUREMENT



BRAKE DISC WEAR MEASUREMENT



0.1MM LASER ACCURACY

TOUCHSCREEN DISPLAY >

ASCOT NO.

MFG. NO.

DESCRIPTION

454-00200

TBE200

Autel TBE200 MaxiTPMS Tread Depth Measurement Tool

AUTEL

AUTEL ADVANCED TPMS SERVICE TOOL + (12) 1-SENSORS

- The MaxiTPMS® TS508 is a new generation TPMS diagnostic & service tool specially designed to activate all known TPMS sensors, read TPMS sensor status, check TPMS system health condition, program MX-sensors and conduct TPMS relearn
- With Quick Mode and Advanced Mode options, you can save time and energy by choosing the most suitable way to complete TPMS work

AUTEL TPMS TOOL/SENSOR KIT CONTAINS:

- TS508 TPMS Tool
- 12 MX-Sensors w/ **Rubber Stems**
- 4 Metal Valve Stems
- OBDII Cord
- · Charging Cord
- Magnet
- User Manual
- Blow Molded Case







At-a-Glance TPMS Status Screen.

ASCOT NO. MFG. NO.

469-50812

DESCRIPTION

TS508K-12 Autel TPMS Tool/Sensor Kit

AUTEL MAXI TPMS WIFI TOOL

& (16) 1-SENSORS

- 4 programming methods
- Free updates for the life of the tool
- Exclusive TPMS status screen
- Change placard value (domestics)
- · OBD relearn on domestics
- Exclusive copy by OBD
- · Update via WI-FI

AUTEL TPMS TOOL/SENSOR KIT CONTAINS:

- TS508 TPMS Tool
- 16 MX-Sensors w/ Rubber Stems
- 4 Metal Valve Stems
- · Charging Cord
- Magnet
- User Manual
- · Blow Molded Case

OBDII Cord

ASCOT NO. MFG. NO. TS508WFK-16 469-50816

DESCRIPTION

Maxi TPMS WIFI Tool & 16 MX-Sensor Kit









AUTEL



MAXI TS608 TPMS/DIAGNOSTIC TOOL & (12) 1-SENSORS

- · Activate all known TPMS sensors and read sensor status
- Diagnose ECU for complete TPMS health check with DTC description
- Read DTCs from ECU and erase DTCs
- Program MX-Sensors by copying original sensor IDs or creating new IDs randomly
- On-tool relearn procedure and wide OBD relearn coverage
- Equipped with a 7-inch touch screen with 1024 * 600P resolution and a VCI mini for wireless communication with the test vehicle

AUTEL TPMS TOOL/SENSOR KIT CONTAINS:

- TS608 TPMS Tool
- 12 MX-Sensors w/ **Rubber Stems**
- · Charging Cord
- User Manual
- Blow Molded Case

ASCOT NO. MFG. NO. 469-60812 TS608K-12 DESCRIPTION

Autel Maxi TPMS Diagnostic Tool



AUTEL MAXI TPMS DIAGNOSTIC TOOL

- Activate all known TPMS sensors and read sensor status
- Diagnose ECU for complete TPMS health check with DTC description
- Read DTCs from ECU and erase DTCs
- On-tool relearn procedure and wide OBD relearn coverage
- Program MX-Sensors by copying original sensor IDs or creating new IDs randomly
- Equipped with a 7-inch touch screen with 1024*600P resolution and a VCI mini for wireless communication with the test vehicle





ASCOT NO. MFG. NO. DESCRIPTION 469-00608 TS608 Autel Maxi TPMS Diagnostic Tool



Advanced Service Features.

AUTEL WIRELESS OBDII CONNECTOR

ASCOT NO. MFG. NO.

DESCRIPTION

469-06464

VCI Mini

Autel Wireless OBDII Connector

VALVE HARDWARE

AUTEL

AUTEL MX-SENSOR PROGRAMMABLE UNIVERSAL TPMS SINGLE SENSORS

- Combines 315MHz & 433MHz frequencies into a single sensor
- 99% vehicle coverage
- The exclusive MX-Sensor patented PRESS release valve allows rubber and metal valve stems to freely interchange by hand without requiring a tool
- Built to match or exceed OEM sensors in frequency strength and durability
- 100% ID clone-able with no relearn required
- Quickly update during installation with an Autel wireless programming tool



ASCOT NO.	MFG. NO.	DESCRIPTION
461-20326	1-Sensor	Autel MX-Sensor Programmable Universal TPMS Single Sensor - Rubber
461-20327	1-Sensor-M	Autel MX-Sensor Programmable Universal TPMS Sensor - Metal
461-20328	1-Sensor-240	Autel MX-Sensor w/ Rubber Valve - 240 Bulk Pk.
461-20329	1-Sensor-24	Autel MX-Sensor w/ Rubber Valve - 24 Bulk Pk.
461-20330	1-Sensor-M-240	Autel MX-Sensor w/ Metal Valve - 240 Bulk Pk.
461-20331	1-Sensor-M-480	Autel MX-Sensor w/ Rubber Valve - 480 Bulk Pk.



461-20327

461-20326

Autel MX-Sensor 240 Bulk Pk.

AUTEL MX-SENSOR REPLACEMENT VALVES

- Patented PRESS release valve design No valve tools required
- Simply click in and press out Cap and core included Available in rubber or metal stems

ASCOT NO.	MFG. NO.	DESCRIPTION	
RUBBER			
469-20280	RV1000	Autel MX-Sensor Replacement Rubber Valve	
METAL			
469-20279	MV1000 Autel MX-Sensor Replacement Metal Valve		
469-20281	9-20281 CV-001 Autel Black MX-Sensor Replacement Metal Valve		
469-20282	0282 CV-002 Autel Titanium Grey MX-Sensor Replacement Metal Valve		
469-20283	CV-003	MX-Sensor Chrome Replacement TPMS Valve	

AUTEL TIRE PRESSURE PLACARD VALUE STICKER

- Never set tire pressure below OE Specs
- · Always use equal to or greater than load rating on replacement tire to determine proper air pressure for placard
- · Always complete and install a new tire placard properly marked
- · Place new tire placard next to OE tire placard
- · Quantity: 100 per roll

ASCOT NO. MFG. NO. DESCRIPTION

469-20284 PVS01 Autel Tire Pressure Placard Value Sticker (100 per Roll)



469-20284

TIRE SIZE Load Cold To Program

ADJUSTED TIRE

TIRE SIZE



SCHRADER EZ-SENSOR®/TOOL BUNDLE

- Programs EZ-sensor® and other programmable TPMS sensors
- Reads, activates & relearns all known TPMS sensors in the market
- Clears, retrieves and decodes TPMS Diagnostic Trouble Code (DTC) information
- Offers guick & convenient software updates through WIFI
- Comes with 5 years of software updates



Schrader S57 Tool



ASCOT NO. 469-21057

MFG. NO. 21057-S57EZG0100

DESCRIPTION

Schrader EZ-sensor®/Tool Bundle



SCHRADER EZ-SENSOR® GO

THE MARKET'S FASTEST PROGRAMMABLE TPMS SENSOR!

1-3 SECOND SENSOR PROGRAMMING FOR A MAJORITY OF DOMESTIC VEHICLES. INCLUDES THE SAME GREAT BENEFITS AND FUNCTIONALITY OF THE EZ-SENSOR®

- 1SKU
- Combines 314.9, 315 & 433 MHZ
- PROGRAMMABLE: Compatible with most tools on the market you may already own
- Rubber Snap-In Stem
- OE QUALITY: From the OE Supplier



ASCOT NO.	MFG. NO.	DESCRIPTION
461-33560	33560	Schrader EZ-sensor® GO TPMS Sensor
461-33561	33560M	Schrader EZ-sensor® GO - 220 Bulk Pk.
461-33562	33560-24	Schrader EZ-sensor® GO - 24 Bulk Pk.





TECH600PRO

- High Resolution Color Display
- Graphical User Interface
- Wireless Vehicle Connection Interface
- Long Lasting, Rechargeable Battery
- Improved LF Signal and UHF Detection
- Faster Tool Response and Operation
- 2 Year Warranty / 2 Year's Software

469-40600



ASCOT NO.	MFG. NO.	DESCRIPTION
469-40600	WRT600PRO	Tech600PRO TPMS Tool Kit - INCLUDES Tech600Pro, Wireless VCI, Power Supply, USB Cable, Quick Start Guide, Black Soft Case, 2 Year Tool Warranty, 2 Year Tool Software
469-40630	WRT600PRO- RS30P	Tech600PRO RITE-SENSOR Bundle Kit - INCLUDES Tech600Pro, Wireless VCI, Power Supply, USB Cable, Ouick Start Guide, 30 Rubber Stem Rite-Sensors, 2 Year Tool Warranty, 5 Year Tool Software

TECH450PRO

- High Resolution Color Display
- Advanced TPMS Technology for faster programming
- Comprehensive OBD Relearn Coverage for Import & Domestic Vehicles
- Long Lasting, Rechargeable Battery
- Improved LF Signal and UHF Detection
- Faster Tool Response and Operation
- TPMS Placard Adjusting
- Programs Many Aftermarket Sensors
- Direct Wi-Fi Updating
- Bluetooth Capable
- 2 Year Warranty / 2 Year's Software

ASCOT NO.	MFG. NO.	DESCRIPTION
469-40450	WRT450PRO	Tech450PRO TPMS Tool



469-40450

TECH RITE PRO

- The TechRITEPro combines high powered functionality with incredible affordability
- The "TRP" is an easy-to-use TPMS Diagnostic Tool, TPMS Relearn Tool, and Rite-Sensor® programming Tool
- High Resolution Color Display
- · Long Lasting, Rechargeable Battery
- Removable/Replaceable Battery
- Improved LF Signal and UHF Detection
- Faster Tool Response and Operation
- · Heavy Duty OBDII Cable/Connector
- 2 Year Warranty / 2 Year's Software

ASCOT NO.	MFG. NO.	DESCRIPTION
469-40100	WRTTRP100	TechRite PRO
469-40110	WRTTRP100-RS10P	TechRite PRO with 10 RITE-SENSORS
469-40130	WRTTRP100-RS30P	TechRite PRO with 30 RITE-SENSORS









- · Configures in less than 3 seconds
- Programs & Updates in less than 10 seconds
- Dual Frequency [315 MHz and 433 MHz]
- 99%, Single SKU Application Coverage
- Comes with Rubber Valve Stem
- Programs with Bartec TPMS Tools
- · Programs in free space or assembled in the wheel
- Programming process is directed by the tool
- · Complete offering including replacement valves and service kits





ASCOT NO.	MFG. NO.	DESCRIPTION
461-10010	RS-1000-10	Rite-Sensor® Sleeve of 10 Boxed Sensors, Rubber & Aluminum Stem (Red Box)
461-10120	RS-1000-120	Rite-Sensor® Case Pack of 120, Rubber & Aluminum Stem
461-10020	RS-1000-20B	Rite-Sensor® Bulk Pack of 20 Rubber Stem
461-10121	RS-1000-120B	Rite-Sensor® Bulk Pack of 120, Rubber Stem
461-10011	RS-1000-10R	Rite-Sensor® Sleeve of 10 Sensors, Rubber Stem (Grey Box)
461-10122	RS-1000-120R	Rite-Sensor* Master Pack, 12 Sleeves of 10 Boxed Sensors (120 total), Rubber Stem (Grey Box)

BARTEC SOFTWARE BUNDLES

- 1, 2 or 3-year electronic TPMS tool software updates
- Tool updates annually adding features, functions & coverages



ASCOT NO.	MFG. NO.	DESCRIPTION
469-46001	WRT600PROSULRS1E	Electronic Tech600PRO one year software update license w/ 10 RITE-SENSORS
469-46002	WRT600PROSULRS2E	Electronic Tech600PRO two-year software update license w/ 16 RITE-SENSORS
469-46003	WRT600PROSULRS3E	Electronic Tech600PRO three-year software update license w/ 24 RITE-SENSORS
469-45001	WRT500SULRS1E	Electronic Tech500 one year software update license w/ 10 RITE-SENSORS
469-45002	WRT500SULRS2E	Electronic Tech500 two-year software update license w/ 16 RITE-SENSORS
469-45003	WRT500SULRS3E	Electronic Tech500 three-year software update license w/ 24 RITE-SENSORS
469-45010	WRT450PROSULRS1E	Electronic Tech450PRO one year software update license w/ 10 RITE-SENSORS
469-45020	WRT450PROSULRS2E	Electronic Tech450PRO two-year software update license w/ 16 RITE-SENSORS
469-45030	WRT450PROSULRS3E	Electronic Tech450PRO three-year software update license w/ 24 RITE-SENSORS
469-44001	WRT400PROSULRS1E	Electronic Tech400PRO one year software update license w/ 10 RITE-SENSORS
469-44002	WRT400PROSULRS2E	Electronic Tech400PRO two-year software update license w/ 16 RITE-SENSORS
469-44003	WRT400PROSULRS3E	Electronic Tech400PRO three-year software update license w/ 24 RITE-SENSORS
469-43001	WRT300PROSULRS1E	Electronic Tech300PROC one year software update license w/ 8 RITE-SENSORS
469-43002	WRT300PROSULRS2E	Electronic Tech300PROC two-year software update license w/ 14 RITE-SENSORS
469-43003	WRT300PROSULRS3E	Electronic Tech300PROC three- year software update license w/ 20 RITE-SENSORS
469-44101	WRTTRPSULRS1E	Electronic TechRITEPRO one year software update license w/4 RITE-SENSORS
469-44102	WRTTRPSULRS2E	Electronic TechRITEPRO two-year software update license w/8 RITE-SENSORS
469-44103	WRTTRPSULRS3E	Electronic TechRITEPRO three- year software update license w/12 RITE-SENSORS

TPMS CHECK BOX

· Identify differences between the tire filing gauge and the TPMS sensor readings • Designed for use with all styles of TPMS sensors • Test TPMS sensors for defects before mounting to the wheel

ASCOT NO MFG NO DESCRIPTION 469-03200 OCB TPMS Check Box



VT TRUCK

· Ideal for fleet management and heavy vehicle maintenance • Manages and stores up to 22 wheels • Checks tire pressure to prevent under-inflation and reduce vehicle down time • Activates TPMS sensors of major truck and bus brands • Displays all sensor data: ID, tire pressure, tire temperature, battery status, etc. • Identifies the sensor by vehicle, by sensor reference or simply scan all protocols to activate • Provides easy access into the wheel arch and twin wheel configurations



DESCRIPTION ASCOT NO. MFG. NO. 469-05001 VTTRUCK VT Truck Activation Tool for Trucks and Buses

VT37 TPMS RESET, TRIGGER & **PROGRAMMING TOOL**

As the successor to the VT36, the brand new VT37 is the ideal tool for DIYers, technicians and front counter workers. The tool is designed to activate, read and service all major OEM & aftermarket sensor brands, as well as perform vehicle specific TPMS relearn procedures. Constant Live Sensor and quarterly updates allow for the newest TPMS sensors to be added to the tool effortlessly. Whether it's stored in a glove compartment or toolbox, the VT37 is the perfect partner for servicing TPMS.

ASCOT NO. MFG. NO. 469-37100 VT37

DESCRIPTION

VT37 TPMS Reset, Trigger & Programming Tool

469-37100

VT56 DIAGNOSTIC TPMS TOOL KIT



ASCOT NO.	MFG. NO.	DESCRIPTION
469-56100	TS56-1000	VT56 TPMS Diagnostic & Reset Master Kit. INCLUDES: VT56 TPMS Tool, OBDII module, docking station, printer, CD with manual and software, magnet, reference guide, USB cable and power supply
469-56102	TS56-1002	VT56 TPMS Tool OBDII Kit. INCLUDES: VT56 TPMS Tool, OBDII module, printer, CD with manual and software, magnet, reference guide, USB cable and power supply

VT57 ALL-IN-ONE TPMS & TIRE MANAGEMENT TOOL

Introducing the all-new VT57 with a brand-new touchscreen interface, 100% OEM sensor diagnostic coverage, 90% OBD coverage, tire tread depth capturing, "Sync-ID"OBD technology and much more. Constant Live Sensor updates and the ability to

connect Wi-Fi to ensure that the VT57 has the latest coverage available.



DESCRIPTION ASCOT NO MFG NO

469-57100 VT57 VT57 All-In-One TPMS & Tire Management Tool

TPMS Accessories & Kits



SCHRADER TPMS VALVE CAPS





468-20595

468-00050







468-20495

468-20795

468-20995



468-59019

ASCOT NO.	MFG. NO.	DESCRIPTION	QTY./BOX
468-00050	20395	Plastic Valve Caps	100
468-20495	20495	Aluminum Valve Caps	100
468-20595	20595	Black TPMS Plastic Sealing Valve Caps for Snap-In Transmitters	100
468-20695	20695	Green TPMS Plastic Sealing Valve Caps for Snap-In Transmitters	100
468-20795	20795	Green TPMS Plastic Sealing Valve Caps	100
468-20995	20995	Black TPMS Plastic Sealing Valve Caps	100
468-59019	59-0019	Green Nitrogen Indicating Aluminum Valve Cap	100
468-59021	59-0021	Chrome-Plated Brass Valve Caps	100
468-59023	59-0023	Universal Nitrogen Caps	100

SCHRADER REPLACEMENT **ALUMINUM VALVE STEMS**

ASCOT NO.	MFG. NO.	DESCRIPTION
469-34000	34000	Replacement Aluminum Valve Stem
469-25080	25080	Aluminum Straight Stem for 90 Degree EZ-Sensor
469-25078	25078	Aluminum Angled Stem for 90 Degree EZ-Sensor
469-25082	25082	Black Straight Stem for 90 Degree EZ-Sensor
469-25083	25083	Black Angled Stem for 90 Degree EZ-Sensor



SCHRADER TPMS VALVE CORE

- Electroless Nickel-Plated valve core
- QUANTITY: Packaged 100 per box

ASCOT NO.	MFG. NO.	DESCRIPTION
468-20055	20055	Schrader TPMS Valve Core



BERU TPMS VALVE INSERTS

- Original equipment valve insert for the HUF Tire Safety System
- Each Insert comes complete with cap, core, grommet & grommet nut
- Colored bottom to differentiate inserts APPLICATIONS: Audi, Bentley, BMW, Ferrari, Land Rover, Maserati, Maybach, Mercedes-Benz, Porsche, Volkswagen • Requires TX-20EZ torx tool for assembly/disassembly





461-59357

ASCOT NO.	MFG. NO.	DESCRIPTION
461-59307	59.0342	Green Insert
461-59337	59.0340	Silver Insert
461-59357	59.0346	Orange Insert
461-59387	59.0344	Black Insert
469-02020	TX-20EZ	Torx Screwdriver



TPMS Accessories & Kits (cont.)



DILL TPMS VALVE CAPS & CORES

· QUANTITY: Packaged 100 per box



MFG. NO.	DESCRIPTION
635	Plastic Cap for VS-950 TPMS Snap-In Valve
650	Small Plastic TPMS Valve Cap - Gray
680	N2 Aluminum Cap for TPMS
690	N2 Plastic Cap for TPMS
100-TP	Electroless Nickel Plated Valve Core
630N	Plastic TPMS Valve Cap - Gray
650B	Short Black Plastic TPMS Valve Cap
	635 650 680 690 100-TP 630N

ALLIGATOR TPMS SNAP-IN REPLACEMENT VALVE

- · Alligator's innovative anti-rotation feature with a rubber lip at the base to prevent the sensor and valve from spinning in the wheel
- Maximum published speed rating of 130 MPH Industry highest
- Self-tapping T10 screw provides better torque and locks the valve to the sensor for a tighter, longer lasting fit • Made in Germany



ASCOT NO.	MFG. NO.	DESCRIPTION
469-59132	591320	Alligator TPMS Snap-In Replacement Valve

TPMS REPLACEMENT VALVES



ASCOT NO.	MFG. NO.	DESCRIPTION
469-17245	17-20045	High-Speed TPMS Snap-In Valve Stem
469-17246	17-20046	TPMS Snap-In Valve Stem (Right Angle Key)
469-17395	17-50395	Snap-In Sensor Rubber Valve Stem (Square Key)
469-17397	17-50397	Snap-In Sensor Rubber Valve Stem
469-17539	17-50399	Hyundai TPMS Snap-In Valve



SHORT TPMS REPLACEMENT SNAP-IN VALVE STEM

• Found on custom wheel applications • Addresses clearance issues with inside valve holes • MAXIMUM **COLD INFLATION PRESSURE:** 65 PSI • Parallel key



ASCOT NO. 469-17398

MFG. NO. 17-50398 DESCRIPTION

Short TPMS Replacement Snap-In Valve Stem

.625" VALVE HOLE TPMS REPLACEMENT VALVES

• Found on Ford Super Duty Trucks and Sprinter Vans • MAXIMUM COLD INFLATION PRESSURE: 150 PSI • Attachment screw and valve cap included



ASCOT NO.	MFG. NO.	DESCRIPTION
469-17392	17-50392	TPMS Replacement Valve for .625" Valve Hole (Parallel Key)
469-17393	17-50393	TPMS Replacement Valve for .625" Valve Hole (Square Key)



TPMS REPLACEMENT VALVES



ASCOT NO	MEG NO	DESCRIPTION
ASCUT NU.	MIFG. NO.	DESCRIPTION
469-17218	17-20018	TPMS Snap-In Valve for Ford
469-17395	17-50395	TPMS Snap-In Square Key
469-17397	17-50397	Continental Snap-In Rubber TPMS Valve Stem
469-17590	17-50390	Metal TPMS Valve Stem for Ford
469-17591	17-50391	TPMS Metal Clamp-In Valve for TRW Screw-In
469-17596	17-50396	TPMS Valve for Dodge Ram Dually with Aluminium Wheels





TPMS Accessories & Kits (cont.)

SCHRADER TPMS ACCESSORY KITS

· The OEM requires that the four sealing components be replaced when re-installing **a TPMS sensor** • The replacement components are supplied in TPMS accessory kits, which are sensor specific • EACH TPMS ACCESSORY KIT **CONTAINS:** 1 Nut, 1 Valve Core, 1 Cap, 1 Grommet











469-20097

ASCOT NO.	MFG. NO.	DESCRIPTION
469-20002	20002	Accessory Kit for ford Transmitters - Replaces 469-29601 & 469-23501
469-20004	20004	Accessory Kit for GM Transmitters - Replaces 469-20701 & 469-21601
469-20006	20006	Accessory Kit for Hummer Transmitters
469-20007	20007	Accessory Kit for Alloy Wheel Nissan Transmitters
469-20009	20009	Accessory Kit for Suzuki Replacement Transmitter
469-20010	20010	Accessory Kit for Prowler Replacement Transmitter
469-20012	20012	Accessory Kit for Corvette Replacement Transmitter
469-20013	20013	Accessory Kit for Dodge Nitro Transmitters
469-20014	20014	Accessory Kit for Nissan Transmitters
469-20015	20015	Accessory Kit for GM/TRW Transmitters
469-20017	20017	Accessory Kit for Volkswagen/Siemens Transmitters
469-20018	20018	Replacement Snap-In Valve ford 20315 Transmitter, Box of 50
469-20019	20019	Accessory Kit for Honda/Acura Transmitters
469-20020	20020	TPMS Service Pack - Stem Only - Chrysler, Dodge, Jeep
469-20022	20022	Accessory Kit for Hyundai/Kia Transmitters
469-20023	20023	Accessory Kit for Beru Stems - No Valve
469-20030	20030	Accessory Kit for Chrysler/Siemens Transmitters
469-20031	20031	Accessory Kit for Pacific Transmitters
469-20032	20032	Accessory Kit for Toyota/Pacific Transmitters
469-20035	20035	Accessory Kit for TRW Long Valve Transmitters
469-20036	20036	Accessory Kit for TRW Short Valve Transmitters
469-22008	22008	Assembled Chrome Replacement Snap-In Valve for Schrader 20153 Transmitter
469-20037	20037	Accessory Kit - Silver Insert - for Audi, BMW, Hyundai, Kia, Mercedes, Porsche, VW
469-20038	20038	Accessory Kit - Green Insert - for Audi, BMW, Hyundai, Kia, Mercedes, Porsche, VW
469-20039	20039	Accessory Kit - Black Insert - for Audi, BMW, Hyundai, Kia, Mercedes, Porsche, VW
469-20040	20040	Accessory Kit - Orange Insert - for Audi, BMW, Hyundai, Kia, Mercedes, Porsche, VW
469-20041	20041	Accessory Kit - Schrader Aluminum Grommet Seat for Adjustable angle stem, 25 Pack
469-20043	20043	Accessory Kit - Continental Rubber Snap-in Valve OE# 68193587AB, 50 Pack
469-20046	20046	Accessory Kit for Schrader High-Speed Snap-In, 50 Pack
469-20047	20047	Accessory Kit for Schrader Gen Gamma Adjustable Angle Aluminum Clamp-in Stem, 50 Pack
469-20049	20049	Accessory Kit for Schrader Gen Gamma Adjustable Angle Aluminum Clamp-in Stem (Mercedes), 50 Pack
469-20635	20635	Accessory Kit for TRWI Rubber Snap-in Valve, 50 Pack
469-20895	20895	Replacement T-10 Screws, 100 Pack
469-22005	22005	TPMS Snap-In Dress Up Kit

SCHRADER TPMS SERVICE PACK ASSORTMENTS

• The service pack should be replaced every time the tire is removed from the wheel

• With Schrader's NEW assortment kits, always have the service pack you need, when you need it! • These kits include Schrader's 12 most popular service packs on the market today • Kits come in a convenient, durable, plastic case that organizes the service packs for faster, more efficient TPMS service





ASCOT NO.	MFG. NO.	DESCRIPTION
469-20097	20097	Small Assortment Kit. INCLUDES: 30 Bags (5 ea) Accessory Kits for Each Transmitter Size, 25 Plastic Valve Caps and Core Tool
469-20698	20698	Accessory Assortment Kit w/EZ-sensor. 1 PLASTIC TRAY CONTAINING: 10 Each of Schrader's 12 Most Popular Accessory Kits (20002, 20003, 20004, 20007, 20008, 20013, 20014, 20020, 20023, 20030, 20032, 20036), four 315MHz EZ-sensors 33000 & (2) 433MHz
469-20798	20798	INCLUDES 8 UNITS OF EACH SERVICE PACK: 20004, 20007, 20009, 20013, 20014, 20018, 20020, 20023, 20030, 20032, 20036, 20049
469-20898	20898	INCLUDES 8 UNITS OF EACH SERVICE PACK: 20004, 20007, 20009, 20013, 20014, 20018, 20020, 20023, 20030, 20032, 20036, 20049 6 Programmable, Single SKU EZ-sensors (# 33500)







DILL TPMS ACCESSORY KITS

ASCOT NO.	MFG. NO.	DESCRIPTION
469-00015	VS-15	Rubber Clamp-In Stem for Toyota Corolla Hatchback
469-00031	VS-30	Rubber Snap-In Valve for Nissan Kicks and Nissan Quest
469-00035	VS-35	Clamp-In Replacement Valve for Dodge & 3500 Trucks
469-00065	VS-65	Snap-In Replacement Valve for Dodge 1500, 2500, & 3500 Trucks
469-00919	VS-919	For use in light truck applications fitted with rims with a 0.625 diameter rim hole using the Ford, GM, and Chrysler snap in TPMS sensor design
469-00925	VS-925A	Aluminum Metal Replacement Valve for GM Snap-in & Ford
469-09251	VS-925C	Chrome Replacement Valve for GM & Ford Snap-in
469-09252	VS-925B	Black Nut/Black Cap Metal Replacement Valve for GM & Ford
469-00950	VS-950	Rubber Snap-In Replacement Valve for GM & Ford Transmitters
469-00951	950SC/4PK	TMPS Snap-IN Chrome Sleeve and Cap 4/Pack for VS-950
469-01010	VS-1010	Rubber Snap-In Stem for Hyundai Sante Fe
469-01030	1030K	Siemens Kit for VW (Fits 1053 Sensor)
469-01031	1031K	VW Kit for Special Wheel Package
469-01040	1040K	Siemens Mercedes Assembled Valve
469-01050	1050K	Siemens Kit for Chrysler w/ Special Metal Washer
469-01060	1060K	Kit for Ford, Lincoln, Mercury
469-01070	1070K	Kit for Buick, Cadillac, Chevrolet, GMC, Isuzu, Pontiac, Saab
469-01077	1077K	Accessory Kit for 8006 Sensor, 97-00 Corvette
469-01080	1080K	Kit for Cadillac, Chevrolet, Chrysler, Dodge, Infiniti, Isuzu, Jeep, Mitsubishi, Nissan, Plymouth, Subaru
469-01090	1090K	Compatible with Beru Sensors
469-01091	1091	Ball-seat valve stem assembly; 56mm, yellow marking
469-01092	1092	Ball-seat valve stem assembly; 43mm; silver or no marking
469-01093	1093	Ball-seat valve stem assembly; 48mm, green marking
469-01094	1094	Ball-seat valve stem assembly; 49mm, black marking
469-01095	1095	Ball-seat valve stem assembly; 51mm, orange marking
469-01096	1096	TPMS Stem For Hyundai, Kia, Honda
469-01097	1097	TPMS Stem For Hyundai, Kia, Honda
469-01098	1098K	Dodge Sprinter Replacement Valve
469-01100	1100K	Compatible with Pacific Sensors for Toyota/Lexus
469-01110	1110K	Compatible with Pacific Sensors for Toyota
469-01130	1130K	Kit for Mazda, Mitsubishi, Nissan
469-02040	2040K	Kit fo Hyundai, KIA
469-02045	2045K	Kit for Honda/Acura
469-07000	7000K	Kit for Acura, Chrysler, Dodge, Jeep, Nissan
469-07020	7020K	Kit for BMW, Cadillac, Honda, Hyujndai, Infiniti, Jaguar, KIA, + more & REDI-Sensor
469-20025	2000K	Kit for Acura, Honda, Hyundai, KIA
469-20130	2030K	Kit for Chrysler, Dodge, M-Benz, Nissan
469-21010	2010K	Kit for Saturn, Volvo
469-21020	2020K	Early 2007 GM Kit for Entire Sensors
469-90662	9066K-LS	TPMS Valve Stem Kit with ball joint









469-00925







469-01010







COMPLETE REPLACEMENT KIT FOR CHRYSLER/DODGE TPMS APPLICATIONS

• COMPLETE REPLACEMENT KIT **INCLUDES THE FOLLOWING:**

Aluminum TPMS Valve Stem w/ Grommet, Valve Nut, Valve Core





▲ WARNING: For more information go to www.P65Warnings.ca.gov.

469-90660

REPLACEMENT STEM FOR CHRYSLER/DODGE TPMS APPLICATIONS

ASCOT NO. 469-90661 9066-1

MFG. NO. DESCRIPTION

Dill Chrysler TPMS Replacement Stem Only





MFG. NO.

DESCRIPTION

Dill Chrysler TPMS Complete Stem Replacement Kit



TPMS Accessories & Kits (cont.)

UNIVERSAL MASTER TPMS TRANSMITTER HARDWARE & TOOL SERVICE SET

- · Versatile 152 piece assortment (15 unique kits) covers over 55 different OEM sensor models and 90% of US vehicles
- TOOLS INCLUDED: A Sensor Service Tool, Ratcheting Torque Wrench, 2 Deep Sockets, 2 Torque Drivers and bits







469-30000

DESCRIPTION ASCOT NO. MFG NO

469-30000 30000 Universal Master TPMS Set

DILL TPMS 7100 ACCESSORY ASSORTMENT

• INCLUDES 4 OF EACH KITS: 1130K, 1030K, 2045K, 1070K, VS-20, VS-90, 1050K, 1080K, 1100K, 2030K, 1110K, 1060K, 2010K, VS-65, 2040K, 2000K, 7020K, 1090K, 7000K and 6 EACH: VS-950 Stems • Approximately 97% coverage



469-07100

ASCOT NO. MFG. NO. DESCRIPTION

469-07100 7100 Dill TPMS Master Accessory Assortment

DILL TPMS REPLACEMENT STEM ASSORTMENT

• INCLUDES 4 OF EACH: VS-65, VS-40, VS-925C, 9066K, 1040K, VS-1010, VS-950, VS-90, VS-925B, VS-20, VS-70 and **2 OF EACH OF THE FOLLOWING:** 1092, 1093, 1094, 1097K, 1096K, VS-965 • Approximately 99% coverage



469-07300

ASCOT NO. MFG. NO. DESCRIPTION

469-07300 7300 Dill TPMS Replaceable Stem Assortment







ASCOT NO.	MFG. NO.	DESCRIPTION
469-00045	VS-45	Clamp-In Stem for REDI-Sensor w/ Clip Design, Chrome Plated Brass. Fits 7001HP-R & Certain OE Sensors
469-00770	VS-70	REDI-Sensor Replacement Valve Stem w/ All Components
469-00771	VS-70B	REDI-Sensor Valve with Black Anodized Nut and Black Cap
469-00772	VS-70S	REDI-Sensor Valve Stem with Cap and Core Assembled
469-00773	VS-70C	Chrome Valve Stem Assembly for OE and REDI-Sensor™

DILL ALUMINUM REPLACEMENT TPMS STEM

• Metal Replacement Clamp-In Valve for GM, Ford, Dodge Ram, Subaru & Suzuki • Made from anodized aluminum • T-10 screw included • QUANTITY: Packaged 20 per box



ASCOT NO.	MFG. NO.	DESCRIPTION
469-00925	VS-925A	Dill Aluminum Replacement TPMS Stem
469-01925	VS-925B	Dill Aluminum Replacement TPMS Stem - Black
469-02925	VS-925C	Dill Aluminum Replacement TPMS Stem - Chrome

RUBBER TPMS SNAP-IN REPLACEMENT VALVES

- Rubber stem and attaching screw for snap-in transmitters
- Cap & core included Requires T-10 Torx Tool for assembly/ disassembly • VS-1010 requires 5415-2 7mm socket adapter





ASCOT NO.	MFG. NO.	DESCRIPTION	QTY./BOX
469-00015	VS-15	Rubber Snap-In TPMS stem for Toyota; includes stepped screw	4
469-00030	VS-30	Rubber Snap-In TPMS Stem w/ Clip	4
469-00065	VS-65	Snap-In Replacement Valve for Dodge 1500, 2500 & 3500 Trucks	25
469-00090	VS-90	Rubber Valve Stem Kit for New Dodge and GM Transmitters	25
469-00200	VS-20	Rubber Snap-In for GM & Ford Transmitters	25
469-00950	VS-950	Rubber Snap-In Replacement Valve for GM & Ford Transmitters	25
469-01010	VS-1010	Rubber Snap-In Stem for Hyundai Santa Fe	25
469-20018	20018	Replacement Snap-In Valve for Schrader Ford 20315 Transmitter	50

TPMS SNAP-IN CHROME SLEEVES AND CAPS




DESCRIPTION

ASCOT NO.	MFG. NO.
469-00951	950SC/4PK

TPMS Snap-In Chrome Sleeve and Cap 4/Pack for VS-950





TPMS Accessories & Kits (cont.)

REDI-SENSOR TPMS COMBO KIT

INCLUDES: 4 of Each REDI-Sensor (7001HPR, 7002A, 7003A, 7004), (5112A) Service Kit Cabinet (180 pcs) • Receive a FREE 8200 TPMS Tool Kit and 9700 Counter Aid

REDI-SENSOR TPMS COMBO KIT

INCLUDES: 4 of each REDI-Sensor (7001HPR, 7002A, 7003A, 7004), (7100 Kit) Service Kit Assortment (86 pcs • Receive a FREE 4065 Toolkit and 9700 Counter Aid





ASCOT NO. MFG. NO. DESCRIPTION 469-07415 7415A REDI-Sensor TPMS Combo Kit



ASCOT NO. MFG. NO. DESCRIPTION 469-17415

7415 REDI-Sensor TPMS Combo Kit







DILL CLAMP-IN REPLACEMENT TPMS VALVE STEMS



ASCOT NO.	MFG. NO.	DESCRIPTION
469-00240	VS-240MC	Silver Chrome Clamp-In 0.453 TPMS Stem. Compatible anywhere a VS-65 or VS-20 is used OEM. Fits Dill 5001/5002; 10 pack.
·		Clamp-In TPMS Valve for 2017 Ford Truck & Ram 3500. Includes USA Double Seal Cap. 6 Per Pack.
		Chrome Clamp-In 0.625 TPMS Stem. Used on 7001HP-R REDI-Sensor with Push Button.
469-00919	VS-919	Silver Clamp-In 0.625 TPMS Stem. Compatible anywhere a VS-950 is used OEM.

TPMS KIT FOR REDI-SENSOR





469-07020









ASCOT NO.	MFG. NO.	DESCRIPTION
469-07000	7000K	TPMS Kit for OE Sensors
469-07020	7020K	TPMS Replacement Component Kit for REDI-Sensor and OE Sensors

▲ WARNING: For more information go to www.P65Warnings.ca.gov.



TPMS Tools



ASCOT NO.	MFG. NO.	DESCRIPTION
168-00652	AS-652H	1/4" Drive Torque Wrench 10-150 In./Lbs.
469-10215	TPMKT015-2	11mm Chrome Socket
469-10315	TPMKT015-3	12mm Chrome Socket

VALVE CORE TORQUE TOOL

· Preset torque guarantees correct setting every time on all cores • Calibrated to 4 in.-lbs. of torque

• Meets the Tire & Rim Association (TRA) specifications for installing valve cores on TPMS applications • Can be used to install and remove cores in standard valves

469-00044

ASCOT NO. MFG. NO. DESCRIPTION 469-00044 TPMS-4VC Valve Core Torque Tool



ASCOT NO.	MFG. NO.	DESCRIPTION
469-15415	15415	T-10 Torque Tool w/ Replaceable Tip
469-20140	20140	T-10 Torque Tool
469-25415	15415-1	Replacement T-10 Tip
469-35415	5415-2	Replacement 7mm Socket for VS-1010 TPMS Snap-In Stem

1/4" SOCKET DRIVER

· Durable screwdriver handle and a chrome vanadium shank • Ideal for use with the TPMS 11mm x 12mm flip socket • 6" Overall Length, 2-1/2" Shank Length • MADE IN THE USA



ASCOT NO. 319-72521

MFG. NO. 7252100

DESCRIPTION 1/4" Socket Driver



T-20 TORQUE TOOL WITH REPLACEABLE TIP

· Installs replacement Beru clamp-

		403 13333
ASCOT NO.	MFG. NO.	DESCRIPTION
469-15535	15535	T-20 Torque Tool w/ Replaceable Tip
469-25535	15535-1	Replacement T-20 Tip





METAL GROMMET REMOVAL TOOL



· Makes grommet and metal washer installation/removal easy and safe • MADE IN THE USA





CORE CAP REMOVAL TOOL

· Easily installs and removes valve caps and valve cores • Two-in-one tool

ASCOT NO. MFG. NO. DESCRIPTION 469-20250 20250 Core/Cap Removal Tool

SCREWDRIVER/CORE TOOL

• Lock-On Feature For The Valve Core • Metal Pocket Clip

• Flat-Head Screwdriver Tip

ASCOT NO. MFG. NO. DESCRIPTION 469-00673 673-D Screwdriver/Core Tool

LOCK-ON

FEATURE



VALVE CORE TOOLS: SCREWDRIVER TYPE & STANDARD BORE LONG VALVE

· Has a plastic screwdriver handle for better grip and leverage



ASCOT NO.	MFG. NO.	DESCRIPTION
469-00607	607	Screwdriver Typ Valve Core Tool
469-00612	612	Standard Bore Long Valve Core Tool



PRE-SET TORQUE **TOOLS FOR TPMS**

• Never adjust a TPMS torque wrench again • Durable and long-lasting

• NO MORE TORQUE ERRORS: It is either "Hi" or "Low" • Ergonomically designed hand grip • Open cross chamber on the 5565 allows for extra leverage bar





ASCOT NO.	MFG. NO.	DESCRIPTION
469-05540	5540	TPMS Preset Torque Tool: Preset at 40 in./lb.
469-05565	5565	TPMS Preset Torque Tool: Preset at 65 in./lb.

469-05540



469-00673

469-20250

TPMS Tools (cont.)



VALVE STEM WRENCH KIT

• Kit includes 9/16" & 5/8" valve stem wrenches in durable pouch



ASCOT NO.	MFG. NO.	DESCRIPTION
469-01820	VSW-1820-KIT	Valve Stem Wrench Kit
469-00018	VSW-18	9/16" Single Hex Valve Stem Wrench
469-00020	VSW-20	5/8" Double Hex Valve Stem Wrench

TPMS VALVE STEM **FISHING TOOL**

• Secures TPMS sensor to wheel during demount • One handle end can be used as a deflator; the other as a core remover • 3" Overall length

ASCOT NO. MFG. NO. DESCRIPTION

TPMS Valve Stem Fishing Tool 469-08910 8910



469-19860

TIRE DEFLATOR SET FOR TPMS VALVE STEMS

ASCOT NO. MFG. NO. DESCRIPTION

469-19860 19860 Tire Deflator Set for TPMS Valve Stems

TIRE DEFLATOR/ **VALVE CORE REMOVER**

· Screws on TPMS valve stems to deflate the tire without removing the valve core




ASCOT NO. MFG. NO. DESCRIPTION

TL-615 Tire Deflator/Valve Core Remover 469-00021

TIRE DEFLATOR SET



· Simply replace a standard sized valve cap with this handy tool and the **special design will depress the pin in the valve core** • Large openings on the sides of the tool allow air to escape quickly from the tire • Tools are marked so tires can be returned to their original position on the vehicle so TPMS will not need to be reset • Also saves time since the valve core has not been removed from the sensor • Packaged in a set of 4

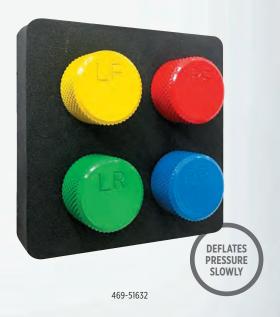

ASCOT NO. MFG. NO. DESCRIPTION

469-51632 TD-1808 Tire Deflator Set









TPMS MASTER TOOL KIT

- · Accurately and quickly install and remove any TPMS component
- NO MORE TORQUE ERRORS: Simplest TPMS set available



469-08200

DESCRIPTION ASCOT NO. MFG. NO.

469-08200 | 8200 Dill TPMS Master Tool Kit

DILL NO.	TYPE	DESCRIPTION
	DILL TPMS M	ASTER TOOL KIT CONTENTS
4700	TPMS Grommet tool	Easily remove and install TPMS valve stem grommets
5540	Speed Torque 40 IN-LB	Fast and accurate TPMS installer for 45 in./lbs. and below Service Kits
5565	Speed Torque 65 IN-LB	Fast and accurate TPMS installer for 65 in./lbs. and above Service Kits
(w/ 5540 & 5565)	Drive Sockets	11mm and 12mm deep well sockets
5414	Valve Core Torque Tool	Installs valve cores to recommended torque (3.5 in./lbs.)
5415	Torque Screwdriver	Torque T-10 screw installation, 12.5 in./lbs. (i.e. VS-950 rubber stem).
5417	Beru Valve Holding Tool	Holds Beru valve in place for easy installation
5535	Torque Screwdriver	Torque T-20 screw installation, 35 in./lbs. (i.e. VS-80 rubber stem)
8910	3-way Fishing Tool	Retains sensor in a secure position, deflates, removes the core
NA	T-bar	May be used for extra leverage with the speed torque tools
N/A	Case	Hard plastic case to keep all of your items secure



ASCOT NO.	MFG. NO.	DESCRIPTION
469-10110	TPMKT01	TPMS Mechanical Tool Kit

TPMS MECHANICAL T	OOL KIT CONTENTS:
1/4" Torque Screwdriver 10-80 in./lbs.	1/4" Adapter
Torque Valve Screwdriver 4 in./lbs.	4 Bits: T5, T10, T15 & T20
2 Sockets: 11mm & 12mm	Grommet Tool





ASCOT NO.	MFG. NO.	DESCRIPTION
469-04065	4065	Dill TPMS Mechanical Tool Ki

	L.												

2 Sockets: 11mm & 12mm 40 in./lbs. Preset Torque Driver 65 in./lbs. Torque Driver

Ontrols Products

TOOL KIT

TPMS



TPMS Transmitters

SCHRADER OF REPLACEMENT TPMS SENSORS

· Include transmitter, grommet, nut, cap & core



ASCOT NO.	MFG. NO.	0.E. NO.	DESCRIPTION
461-21507	21507	321507	Snap-in Faraday 315MHz GM Global A ASK Basic
461-29020	29020	Multiple	Snap-in Basic Faraday Gen 6 315MHz Ford Global Spec FSK
461-29093	29093	68402371AA	Chrysler Snap-In Type Repl. Transmitter

REDI-Sensor[™]

REDI-SENSOR MULTI-APPLICATION SENSOR

• Installs right out of the box • No programming required, saving you 8-10 minutes per vehicle • Reduces replacement sensor inventory • Adjustable valve stem design • Fits over 90% of the market • No additional training required • All REDI-Sensors are available in a rubber stem format



Pivoting valve stem makes installation easier and accommodates a wide range of wheel rim profiles

ASCOT NO.	MFG. NO.	DESCRIPTION
461-07001	7001HP	315MHz REDI-Sensor Multi-Application Sensor (Clamp-In Style)
461-07002	7002A	REDI-Sensor for Honda, Hyundai, Kia, Lexus, Toyota & Scion
461-07003	7003A	315MHz REDI-Sensor Multi-Application Sensor (Clamp-In Style)
461-07004	7004	433MHz REDI-Sensor Multi-Application Sensor (Clamp-In Style)
461-07011	7001HP-R	315MHz REDI-Sensor Multi-Application Sensor (Snap-In Style)





461-29093



Dill Replacement TPMS Transmitters

DILL TIRE PRESSURE MONITORING SYSTEM (TPMS) TRANSMITTERS

• INCLUDES: Transmitter, grommet, nut, cap & core

ASCOT NO.	MFG. NO.	DESCRIPTION
461-01027	1027	Huf BMW
461-01029	1029	Entire Kia Spectra/Rio
461-01043	1043	Siemens 2008 Chrysler
461-01044	1044	2007-2008 Volvo
461-01045	1045	2008-2011 Land Rover - 315 MHz
461-01052	1052	Siemens 2004 Chrysler
461-01055	1055	Siemens Land Rover/Jaguar
461-01056	1056	Siemens Mazda
461-01068	1068	Hyundai/Kia
461-01203	1203	Toyota - 40 Degree Angle
461-01208	1208	Honda Accord/CRV/Fit
461-01209	1209	Honda Pilot/Some Acura
461-01212	1212	Honda Civic
461-01214	1214	Honda/Acura
461-01216	1216	Nissan
461-01217	1217-WH	Lexus SC 430 White
461-01218	1218	2012 Toyota Camry, Yari
461-01222	1222	Hyundai - Only Use w/ Bartec Rev.
461-01225	1225	2014 Highlande/RAV4 RKE
461-01230	1230	2015 Toyota Camry
461-01382	1382	Nissan Titan XD
461-02112	2112	Tesla
461-02168	2168	2015-16 Tesla
461-02510	2510	2014-2015 Kia Tucson/ Sportage/Forte
461-03751	3751	2016 Honda Pilot
461-05134	5134	2015 Volvo
461-05256	5256	2014 BMW
461-05276	5276	2015 Land Rover
461-05507	5507	Hyundai/Kia
461-05510	5510	2015 Hyundai Genesis/Santa Fe
461-05511	5511	Honda/Acura
461-05512	5512	2013 Acura RDX
461-05513	5513	2013 Acura ILX

ASCOT NO.	MFG. NO.	DESCRIPTION
461-05514	5514	Acura ILX/MDX//RDX/TLX
461-05523	5523	2017 Hyundai Elantra/Kia Sportage
461-05555	5555	Nissan
461-05556	5556	2013 Nissan Altima/Pathfinder
461-05557	5557	Nissan
461-05558	5558	2014 Infiniti Q50
461-05559	5559	2014 Nissan Rogue
461-05775	5775	2013 Dodge Dart
461-06815	6815	2014 Dodge Ram/Jeep Cherokee
461-06825	6825	Snap-In Rubber Stem and Sensor for Inner Dual on Dodge Ram
461-06829	6829	Clamp-In Stem and Sensor for Outer Alloy on Dodge Ram
461-09001	9001	HUF RDE 001 for Audi/ Mercedes - 433MHz
461-09002	9002	HUF RDE 002 for BMW 3/5/7 Series - 433 MHz
461-09003	9003	HUF RDE 003 for BMW X5/ Land Rover - 433MHz
461-09004	9004	HUF RDE 004 for Mercedes
461-09005	9005	HUF RDE 005 Cayenne/ Touareg - 433 MHz
461-09011	9011	2010 Audi
461-09012	9012	2010 BMW, Mini Cooper
461-09013	9013	2013 Volkswagen CC
461-09017	9017	2013 BMW 3-Series
461-09018	9018	2014 Panamara
461-09159	9159	2008+ Saab 9-3
461-09204	9204	Nissan
461-09280	9280	2015 Ford Mustang/F-150 Series
461-09342	9342	Nissan NV
461-09398	9398	Chrysler Snap-In
461-09505	9505	Hyundai Velostar, Azera
461-11204	1204	Toyota/Lexus
461-11217	1217-BL	Lexus SC 430 Blue
461-21217	1217-RD	Lexus SC 430 Red
461-31217	1217-YL	Lexus SC 430 Yellow





461-01051









Aftermarket TPMS Accessory Kits

AFTERMARKET TPMS ACCESSORY KITS

ASCOT NO.	MFG. NO.	DESCRIPTION			
468-17490	17-490T	TPMS High Temp (Red) Valve Core Nickel Plated			
468-17491	17-490TY	TPMS High Temp Valve Core, Nickel Plated, YELLOW Band			
468-17492	17-492L-1	Long Skirted Black Plastic Cap with Seal for 17-20008			
468-17493	17-493NP	Chrome Plated Plastic Cap, Green Top			
468-17592	17-492T-1	Gray Plastic TPMS Valve Cap with Red Silicone Seal			
468-17593	17-493P	Chrome Plated Plastic Cap			
468-17692	17-492LG-1	Long Skirted GREEN Plastic Cap with Seal for 17-20008			
469-17107	17-20107AK	TPMS Parts Kit for GM Applications			
469-17198	17-20198AK	TPMS Parts Kit for Dodge Sprinter Applications			
469-17205	17-20005AK	TPMS Parts Kit for Nissan Applications			
469-17206	17-20006AK	TPMS Parts Kit for GMC, Hummer, Isuzu Applications			
469-17207	17-20007AK	TPMS Parts Kit for Nissan, Infiniti Applications			
469-17208	17-20008	GM TPMS Rubber Snap-In Valve			
469-17209	17-20009AK	TPMS Parts Kit for Saab, Suzuki Applications			
469-17210	17-20010AK	TPMS Parts Kit for Volvo Applications			
469-17211	17-20011AK	TPMS Parts Kit for Subaru Applications			
469-17212	17-20012AK	TPMS Parts Kit for Prowler, Corvette Applications			
469-17213	17-20013AK	TPMS Parts Kit for Dodge, Jeep, Chrysler Applications			
469-17214	17-20014AK	TPMS Parts Kit for Nissan, Infiniti Applications			
469-17215	17-20015AK	TPMS Parts Kit for GM with TRW Clamp-In Sensor			
469-17216	17-20016AK	TPMS Parts Kit for Mercedes, Smart Applications			

ASC	OT NO.	MFG. NO.	DESCRIPTION
469	9-17218	17-20018	TPMS Ford Rubber Snap-In Valve
469	9-17221	17-20201AK	TPMS Parts Kit for Chrysler, GM Applications
469	1-17222	17-20202AK	TPMS Parts Kit for Audi, Mercedes, Volkswagen Applications
469	1-17223	17-20203AK	TPMS Parts Kit for Audi, Mercedes Application
469	1-17224	17-20204AK	TPMS Parts Kit for Acura, Honda, Kia Applications
469	1-17226	17-20206AK	TPMS Parts Kit for Hyundai, Honda, Kia Applications
469	1-17227	17-20207AK	TPMS Parts Kit for Volkswagen Applications
469	1-17228	17-20028AK	TPMS Parts Kit for Chrysler, Dodge, Mitsubishi Applications
469	1-17235	17-20035AK	TPMS Parts Kit for Honda Applications
469	1-17236	17-20036AK	TPMS Parts Kit for Acura, Honda, Kia Applications
469	1-17272	17-20720AK	TPMS Parts Kit for Conti OE Sensors & Redi-Sensor
469	1-17275	17-20725AK	TPMS Service Kit with Valve
469	-17296	17-20096AK	TPMS Parts Kit for Ford Applications
469	9-17311	17-20211AK	TPMS Parts Kit for Misc. Import Applications
469	9-17316	17-20216AK	TPMS Parts Kit for Lexus/ Toyota Applications
469	9-17317	17-20217AK	TPMS Parts Kit for Lexus/ Toyota Applications
469	-17320	17-20020	TPMS Stem Only for Chrysler, Dodge, Mercedes
469	9-17321	17-20221AK	TPMS Parts Kit for Lexus SC430 Applications
469)-17323	17-20223AK	TPMS Parts Kit for GM (SS Corvette)
469	-17420	17-20020AK	TPMS Parts Kit + Stem for Chrysler, Dodge, Mercedes Applications
468	1-17792	17-492-1	Black Plastic Valve Cap w/ Red Silicone Seal





469-17210



469-17211



Smart Sensor Pro+

SMART SENSOR PRO+ PROGRAMMING/SCANNING TOOL

· Quickly & easily program Smart Sensor "blank" sensors to emulate the protocol • Program a Smart Sensor in seconds • Copies the original sensor ID to Smart Sensor • Recognized by specific vehicles • Scans OE sensors • Free lifetime updates • Replacement Sensors and stems available



469-17144



The Smart Sensor Pro+ Programming/Scanning Tool with Replacement Sensors* (available separately).

ASCOT NO.

MFG. NO.

DESCRIPTION

469-17144

Smart Sensor Pro+ Programming/Scanning Tool



SMART SENSOR ONE UNIVERSAL TPMS **SENSORS & REPLACEMENT STEMS**

- · Combines 314.9 MHz, 315 MHz & 433.92 MHz all in one sensor • 99% vehicle application coverage
- Reduces TPMS service time Reduces Inventory
- Truly universal/programmable sensor Supports future vehicle applications & Auto-Locate technologies (WAL, PAL, LocSync) • Manufactured & tested to OE specifications & quality/performance standards





ASCOT NO.	MFG. NO.	DESCRIPTION
461-17441	17-43041	Smart Sensor One Universal TPMS Sensor w/ Rubber Snap-In Valve
461-17442	17-43042	Smart Sensor One Universal TPMS Sensor w/ Metal Clamp-In Valve
469-17446	17-43046	Rubber Snap-In Valve for Smart Sensor One
469-17447	17-43047	Gloss Black Valve for Smart Sensor One
469-17448	17-43048	Matte Black Valve for Smart Sensor One
469-17449	17-43049	Aluminum Valve for Smart Sensor One
469-17450	17-43050	Polished Chrome Valve for Smart Sensor One
469-17452	17-43052	Valve Adapter for Smart Sensor One





PRO+ SMART SENSOR OBDII MODULE

- Turns your Smart Sensor Pro+ Tool into a complete TPMS service tool capable of performing both stationary and OBDII relearns
- Perform OBDII relearns on Asian and Domestic vehicles where OBDII is required, when installing a new sensor or rotating tires • Download TPMS sensor ID's from the ECU for advanced diagnostics



469-17145

ASCOT NO. MFG. NO. DESCRIPTION

469-17145 17-144-2 Pro+ Smart Sensor OBDII Module - 2-Piece Kit

SMART SENSOR ELITE BLUETOOTH TOOL OBDII MODULE

- WIRELESS: No cable necessary Perform OBD II relearns
- Greatly simplifies relearn process on Mitsubishi vehicles



469-17141

ASCOT NO. MFG. NO. DESCRIPTION 17-140-1 Smart Sensor Elite Bluetooth Tool OBDII Module

SMART SENSOR ELITE PROGRAMMING & DIAGNOSTIC TOOL KIT

• Easy to Follow Icon Based Interface • Perform both Stationary & OBDII relearns with ease • Comprehensive relearn procedures built-in the tool • TPMS placard adjusting \bullet Read sensor IDs by OBDII © directly onto a Smart Sensor • Simple wireless update • OE Sensor Information including part no. & ID Locator • VIN CODE **SCANNER:** Fast & accurate • **CAPTURED** TIRE IDENTIFICATION NUMBER (TIN): Aids in tire registration process • Upload VIN/TIN, via PC, to dealer's shop software • Print TPMS & VIN/TIN data via PC



469-17140



Smart Sensor Elite Programming and Diagnostic Tool

Micro USB Data Cable and Charger

SMART SENSOR ELITE PROGRAMMING

Robust Commercial Grade, OBD II Cable

TPMS Activation Magnet

& DIAGNOSTIC TOOL KIT CONTENTS

ASCOT NO. MFG. NO. DESCRIPTION

469-17140 17-140

Smart Sensor Elite Programming & Diagnostic Tool Kit



469-17141



Tubeless Tire Valves (Passenger)

SNAP-IN TUBELESS TIRE VALVES

· Dill, Schrader or equivalent available

ASCOT NO.	TR NO.	EFFECTIVE LENGTH
FOR .3	46" VALVE	HOLES
461-00438	438	11/32"
FOR .4	53" VALVE I	HOLES
461-00412	412	7/8"
461-00413	413	1-1/4"
461-00414	414	1-1/2"
461-00418	418	2"
461-00423	423	2-1/2"
FOR .6	25" VALVE I	HOLES
461-00415	415	1-1/2"
461-00425	425	2"



TR415



CHROME-SLEEVE SNAP-IN TYPE **TUBELESS TIRE VALVES**

· Standard snap-in type tubeless tire valves are fitted with an attractively designed hexagon valve cap and chrome sleeve to cover the valve stem area

• Available in two lengths to fit .453" valve holes

ASCOT NO.	TR NO.	EFFECTIVE LENGTH
461-41211	412SC	7/8"
461-41311	413SC	1-1/4"
461-41811	418SC	2"



461-41311

HIGH PRESSURE SNAP-IN VALVES

• Tubeless snap-in type valves for high pressure applications • Maximum cold inflation pressure is 80 PSI • For .453" or .625" rim holes • Do not use on tire rims that exceed .205" in thickness at the valve hole

ASCOT NO.	TR NO.	EFFECTIVE LENGTH	VALVE HOLE DIAMETER
461-00600	600HP	1.27"	.453"
461-00602	602HP	2"	.453"
461-00801	801HP	1.25"	.625"
461-00802	802HP	2"	.625"



CLAMP-IN TUBELESS TIRE VALVES

· Nickel plated metal valves can be installed in all passenger cars, light trucks and industrial rims with .453" or .625" valve holes • Rubber grommet forms a seal when valve is clamped to rim by tightening hex nut • Maximum inflation pressure is 200 PSI • Includes 2 rubber grommets

ASCOT NO.	TR NO.	EFFECTIVE LENGTH
462-00416	416	1-1/4"
461-01416	416L	2"



462-00416

REPLACEMENT GROMMETS

• Replacement grommets for .453" and .625" valve holes

ASCOT NO.	TR NO.	EFFECTIVE LENGTH
468-59765	RG-54	Grommet for .453" Hole
468-99393	RG-39	Grommet for .625" Hole



468-59765

HIGH PERFORMANCE VALVE

· Chrome plated clamp-in valves are easily installed in all types of passenger car wheels • For .453" or .625" valve holes

ASCOT NO.	MFG NO.	DESCRIPTION
462-00800	VC-011	High Performance Valve



462-00800

ENKEL VALVES

· A high performance "No Show" type chrome plated valve that installs from the outside • A rubber washer and nut are on the inside • Fits .453" diameter hole

MFG NO.	DILL NO.	DESCRIPTION	462-0602
TV-6010	VS-934E	3/4" Length, Standa	rd
TV-6020	VS-933E	Bent at 45° Angle	
TV-6030	VS-936E	1-1/4" Length, Stand	ard
TV-6040	VS-935E	1-3/4" Length, Stand	lard
	TV-6010 TV-6020 TV-6030	TV-6010 VS-934E TV-6020 VS-933E TV-6030 VS-936E	MFG NO. DILL NO. DESCRIPTION TV-6010 VS-934E 3/4" Length, Standa TV-6020 VS-933E Bent at 45° Angle TV-6030 VS-936E 1-1/4" Length, Stand



462-06040

HIGH PRESSURE CHROME SLEEVE TIRE VALVE

• Used to 80 PSI cold inflation pressure • Fits 453" diameter valve hole, maximum rim thickness .205" at valve hole • Chrome sleeve

ASCOT NO.	TR NO.	DESCRIPTION
461-01600	600HPC	High Pressure Chrome Sleeve Tire Valve



461-01600



IMPORTANT: Snap-in passenger valve stems are safe for tire pressures up to a maximum of 65 PSI (cold tire pressure) and for a maximum rim thickness of .156" (3.9mm). If greater pressure or rim thickness is required, metal clamp-in valve stems are recommended.



Tubeless Tire Valves (Truck)

TRUCK & BUS TUBELESS TIRE VALVES: 570 SERIES

 Used on both demountable and non-demountable rims with standard 5/8" (.625") side hole valve mountings • Heavy duty rubber grommet forms airtight seal when valve is clamped in rim by tightening the hex nut • Eight valves cover all truck rim requirements

• Available in custom bends • Dill or Haltec equivalent available

ASCOT NO.	TR NO.	EFFECTIVE LENGTH
463-00575	575	1-1/8"
463-00501	501	1-1/2"
463-00500	500	2"
463-00570	570	3-1/8"
463-00571	571	3-3/8"
463-00572	572	3-3/4"
463-00573	573	4-3/8"
463-00574	574	5"





463-00500

REPLACEMENT VALVE COMPONENTS

• Packaged 100 per Box

ASCOT NO.	DILL NO.	DESCRIPTION
468-00103	100-TB	Dill Replacement Core
468-00462	462G	Dill Green High Temp Grommet
468-00765	765	Dill Replacement Dome Cap
468-01462	462-F	Dill Red High Temp Grommet (-50F to 400F)
468-02462	462	Dill Black Rubber Grommet

TUBELESS VALVES FOR ALUMINUM DISC WHEELS

• For drop-center aluminum disc wheels with 5/8" bottom valve hole

ASCOT NO.	TR NO.	EFFECTIVE LENGTH
463-00509	509	4-3/4"
463-00510	510	5-1/2"
463-00511	511	4-1/4"
468-05093	509-3	Replacement Rubber Grommet



NITROGEN O-RING & SLEEVES

- Fits 540 and 570 Truck Valves
- · Nitrogen use in truck tires

ASCOT NO.	TR NO.	DESCRIPTION
468-00307	TS-OR	O-Ring
468-00607	NITSLV	Indicator Sleeves








ALUMINUM WHEEL TRUCK TUBELESS TIRE VALVES: 540 & 550 SERIES

· Designed for use with 9.7mm (.382") rim hole • Rubber O-ring forms a seal when valve is clamped to rim by tightening hex nut • Designed specifically for use in aluminum wheels • Dill or equivalent available • 550

Series equipped with rubber grommet



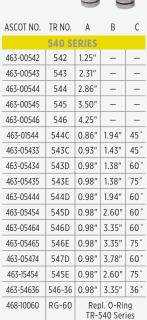

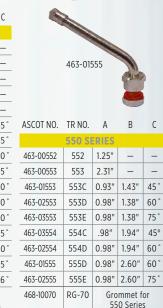

METRIC RIM HOLE VALVES (9.7MM VALVE HOLE)

- Some imported trucks will have steel wheels that incorporate the 9.7mm valve hole (.382")
- Most popular valves for this application
- Other sizes available upon request

ASCOT NO.	MFG NO.	ETRTO	BEND	Α	В
462-04100	41 MS-00	V3-20-1	STR	1-3/16"	_
462-06027	60 MS-27	_	27°	1-3/16"	1-3/16"
462-07025	70 MS-27	V3-20-5	27°	1-3/16"	1-9/16"
462-08027	80 MS-27	V3-20-7	27°	1-3/16"	2"
462-09027	90 MS-27	V3-20-4	27°	1-3/16"	2-3/8"
462-11527	115 MS-27	V3-20-6	27°	1-3/16"	3-3/8"
468-00707	70 MS-7	_	7°	-	_









Truck & Specialty Valves

RADIAL COMMANDER VALVE FOR 15" DISC WHEELS

• 23° bend clamp-down valve for .625" valve hole • Bend allows clearance of brake drum for tire service • Cap and core not included

ASCOT NO.	MFG NO.	DESCRIPTION
462-01147	VS-1223R	Radial Commander Valve. Made in the USA.
462-01224	VS-1224	Longer Radial Commander Valve for Equal Applications



VALVE FOR 16 X 6KS WITH OVAL HOLE

- Oval rim slot valve for 16 x 6KS and 16 x 6-1/2LS rim contours • Allows a positive seal in this special valve hole
- Check the valve hole for metal burrs prior to installation

ASCOT NO.	MFG NO.	DESCRIPTION
462-05010	H5010V	Oval Rim Slot Valv



462-05010

TRUCK/BUS SCREW-ON REPAIR VALVES

· Replace damaged cured-in or cured-on valves without cutting out old valve base • 1-1/16" horizontal diameter

ASCOT NO.	MFG NO.	EFFECTIVE LENGTH
463-01177	1177A	3-3/4"
463-01175	1175A	4-1/2"
463-01078	1078A	5"



TRACTOR FRONT WHEEL VALVES

· Low profile valve offers minimum protrusion above the rim • 9/16" effective length with chrome finish • Fits .453" or .625" valve holes

ASCOT NO.	MFG NO.	DESCRIPTION
462-06008	TV-6008C	Tractor Front Wheel Valve With Chrome Finish
462-16008	TV-6008	Tractor Front Wheel Valve With Brass Finish



TUBELESS MOTORCYCLE VALVE

- Has O-ring seal Fits .327" valve holes
- EFFECTIVE LENGTH: 1-13/16"

ASCOT NO MEG NO DESCRIPTION

462-00430 TR-430 Tubeless Motorcycle Valve



462-00430

ALLOY VALVE

· Light alloy valve used on racing and light alloy wheels • Fits .453" valve hole • Has O-ring seal

DESCRIPTION ASCOT NO MFG NO 462-00523 H-523MS Alloy Valve



462-00523

SPECIAL CLAMP-IN TIRE VALVE

• Designed for front wheel drive Toronado ('66-'78) and Eldorado ('67-'78) cars

ASCOT NO. MFG NO.





462-00417

FORD "F" SERIES TRUCK VALVE

· Ford F-Series Trucks with inner dual wheels • Sealing metal cap • 0.453" valve hole • Torque 25-45 inch/lbs.

ASCOT NO.	MFG NO.	DESCRIPTION
462-00962	VS-962C	Ford "F" Series Truck Valve



FORD "F" SERIES TRUCK VALVE

- Ford "F" series with dual wheels Accuride steel 16" x 16" • Front and rear wheels
- Nickel finish Includes dual seal cap

MFG NO.

TV-416MC

ASCOT NO.

462-02416



462-02416



Truck & Specialty Valves (cont.)



FORD "F" SERIES TRUCK VALVE

- Ford "F" series with dual wheels Alcoa aluminum 16" • Front and rear wheels
- Chrome finish Includes dual seal cap

ASCOT NO. MFG NO. DESCRIPTION

FORD "F" SERIES VALVE • Ford "F" series with dual wheels • Accuride steel 19.5" • Front and rear wheels • Nickel finish • Includes dual seal cap

MFG NO.

TV-416/DS-1

ASCOT NO.

462-03416

462-01600 N-1600 Ford "F" Series Truck Valve







462-03416





FORD "CUT-AWAY" SERIES VALVE

DESCRIPTION

Ford "F" Series Valve

• Ford "cut-away" series with dual wheels • Accuride steel 16" x 16" wheels • Front and rear wheels • Nickel finish • Includes dual seal cap

ASCOT NO MFG NO DESCRIPTION 462-01416 TV-416LF Ford "F" Series Valve



462-01416

FORD "CUT-AWAY" AND CARGO VAN SERIES VALVE

• Ford "cut-away" and Cargo van series with single rear wheels • Accuride steel 16" x 7" wheels • Front and rear wheels • Chrome Finish

ASCOT NO. MFG NO DESCRIPTION Ford "Cut-Away" & 462-01575 TV-575HP/DS-1 Cargo Van Series



- O-RING SEAL SILICONE TRUCK VALVES
- · Handles any type of high temp application • Operating temperature from -67 °F to 500 °F
- Seals between the rim and valve more effectively
- REPLACEMENT O-RINGS AVAILABLE (Dill 495)



-67°F TO

500°F





469-02572

ASCOT NO.	MFG. NO.	DESCRIPTION
463-01571	VS-571-EQ	O-Ring Silicone Truck Valve for TR571
463-01572	VS-572-EQ	O-Ring Silicone Truck Valve for TR572
463-01573	VS-573-EQ	O-Ring Silicone Truck Valve for TR573
469-02570	VS-570EQ	O-Ring Silicone Truck Valve for TR570
469-02572	VS-572EQ-13	O-Ring Silicone Truck Valve for TR572 - 13° Bend
469-02573	VS-573EQ-13	O-Ring Silicone Truck Valve for TR573 - 13° Bend
469-29021	VS-902W	Low profile Chrome clamp-in tire valve; effective length 1.32"; 0.453" valve hole; torque: 25-45 in. lbs.
469-29022	VS-902WP	VS-902 with flow thru cap; effective length: 2.00" w/ cap installed; 0.453" valve hole; torque: 25-45 in. lbs. (Cross ref: N-1600)
469-29023	VS-902K	TR-416S; For Ford F-Series outer steel wheels (brass); Effective length: 1.96"; 0.453" valve hole; Torque: 25-45 in. lbs.; Made in USA (Cross ref: TV-416/DS-1)
469-29621	VS-962WZ	Chrome clamp-in tire valve with 23° bend w/ plated flow thru cap; Effective legnth: 2.32" w/ cap installed; 0.453" valve hole; torque: 25-45 in. lbs.





NUT SPLITTER

- Removes brass tire valves from truck rims
- · Available in manual and pneumatic

ASCOT NO.	MFG. NO.	DESCRIPTION
469-00580	NS58B	Manual Nut Splitter
469-00590	NS59B	Pneumatic Nut Splitter. Attaches to Pneumatic Hammer

VALVE NUT TORQUE WRENCHES

• Wrench flexes when proper torque setting is reached • Prevents overtightening of the valve grommet • Cushioned handle • Sizes and preset torque settings laser etched on shaft • 9/16" for TR570 series valve hex nuts • 5/8" for TR540-550 series valve hex nuts • +/- 4% accuracy

ASCOT NO.	MFG. NO.	DESCRIPTION
168-00916	NSPTW916	9/16" Preset Valve Torque Wrench - 42 in./lb.
168-00058	NSPTW58	5/8" Preset Valve Torque Wrench - 100 in./lb.

VALVE BLASTER TRUCK VALVE STEM REMOVAL TOOL

• Removes valves quickly • Slide hammer with an internal spring absorbs the shock of impact • Easy to use • Designed to sheer the bottom flange off the valve with one or two blows • OAL - 63"

ASCOT NO.	MFG. NO.	DESCRIPTION
469-22011	VB	Valve Blaster Truck Valve Stem Removal Tool
469-22012	RE	Replaceable End for Valve Blaster Truck Stem Removal Tool



VALVE BREAKER

• Removes valves quickly • Slide hammer with an internal spring absorbs the shock of impact • Easy to use • Designed to sheer the bottom flange off the valve with one or two blows

ASCOT NO.	MFG NO.	DESCRIPTION		
469-35934	35934	27" Valve Breaker		
469-32011	35936	45" Valve Breaker		
469-32012	35935	Valve Breaker Parts Kit		

DILL TRUCK VALVE TOOL KIT

• Tool Kit for alloy and steel truck wheels • Allows you to accurately inspect, gauge and install truck valves with pre-set torque tools • Follows industry guidelines and valve hole measurements

ASCOT NO.	MFG. NO.	DESCRIPTION
469-05700	5700	Dill Truck Valve Tool Kit w/ 2 Open-End Torque Tools
469-05720	5720	Dill Truck Valve Tool Kit w/ 1 Open-End and 1 Straight Torque Tool
469-15720	5720-Poster	Wall Poster of Accurate Truck Valve Installation and Inspection Processes

▲ WARNING: For more information go to www.P65Warnings.ca.gov.





Valve Caps, Cores & Extensions

STANDARD VALVE CORES

• Valve cores all have .206"-36" threads and are compatible with existing U.S.A. and E.T.R.O. housing standards as well as proposed I.S.O. standards -meets specification

ZZ-V-25 and TR C-1 • 5405V recommended for all truck, bus and commercial applications; general purpose heat-resistant applications

• 8500TV for general purpose valve use • STANDARD PACK QUANTITY: 100



- 4	00	٠,	20	-	2	•
	68					

ASCOT NO.	MFG. NO.	OPERATING PRESSURE RANGE	OPERATING TEMP RANGE (F)	OPENING PRESSURE	PLUG SEALING MATERIAL	PLUNGER SEALING MATERIAL
468-00103	100-TP	Up to 300 PSI Max	-65° To +250°F	80 PSIG	Teflon	Silicone
468-08500	8500TV	0-200 PSI - Peaks Of 300	-40° To +225°F	60 PSIG	Green Teflon	Black Nitrile

PASSENGER VALVE CAPS

• Fits .305"-32" threads on standard type valves



468-00660



468-00680



468-00690







468-05005 468-59019

ASCOT NO.	MFG. NO.	DESCRIPTION		PACK SIZE	FINISH
468-00107	Cap-P	Plastic Valve Cap		100	Plastic
468-00207	CAP-PG	Green Plastic Nitrogen Cap		100	Plastic
468-00660	VC8	Standard Black Plastic Valve Cap		_	Plastic
468-00680	680	N2 Aluminum Cap for TPMS With Adhesive Green Ring		100	Aluminum
468-00690	690	N2 Plastic Painted Metalic Silver Cap for TPMS With Adhesive N2	_	100	Plastic
468-05005	2413CS	Combination Cap/Sleeve for TR413	TR413	_	Chrome
468-59019	59-0019	Green Nitrogen Indicating Aluminum Valve Cap	_	100	Aluminum
468-59021	59-0021	Chrome Plated Nitrogen Indicating Brass Valve Cap	_	100	Aluminum

TRUCK VALVE CAPS



468-00102







468-00632 468-00765

ASCOT NO.	MFG. NO.	DESCRIPTION	TR NO.	SEALING WASHER MATERIAL	OPERATING PRESSURE	OPERATING TEMP RANGE (F)	PACK SIZE	FINISH
468-00765	765	Dill Dome Cap	VC3	Nitrile	0-200 PSI	-40° To +165°F	100	Nickel Plated
468-00632	632	Dill High Temp Dome Cap	VC3	Plastic	100 PSI	-40° To +250°F	100	Nickel Plated
468-00102	6300V	All Purpose Cap With Screwdriver Top For Removing/ Inserting Valve Cores	VC2	Nitrile	0-200 PSI	-40° To +165°F	100	Nickel Plated



PASSENGER VALVE CAPS







ASCOT NO.	MFG. NO.	DESCRIPTION	QTY./ BOX
168-06300	630N	Gray Plastic TPMS Cap (Tall)	100
168-00635	635	Black Plastic TPMS Cap for VS950 Applications	100
168-00650	650	Gray Plastic TPMS Cap (Short)	100

DOUBLE SEALING VALVE CAPS



















	MFG.			
ASCOT NO.	NO.	DESCRIPTION	QTY./ BOX	
468-06541	6541N	Double Seal Valve Cap	50	
468-16541	6541N	Double Seal Valve Cap	250	
468-26451	6541A	Double Seal Valve Cap, Nickel, Grooved	50 or 250	
468-36541	6541B	Double Seal Valve Cap, Brass	500	
468-46541	41 6541N Double Seal Valve Cap, Nickel, Threaded		50, 250 or 500	
468-56541	6541P Double Seal Valve Cap, Chrome Plated		500	







THE ORIGINAL **ALLIGATOR V2B DUAL SEAL CAP**

- · Made in Germany by Alligator • Increased tire life
- · Lower fuel consumption
- Safety for driver and vehicle



468-02222



ASCOT NO.	MFG. NO.	DESCRIPTION	QTY./BOX
468-02222	V2B-50	Alligator V2B Dual Seal Cap	50
468-12222	V2B-250	Alligator V2B Dual Seal Cap	250

PASSENGER CAR EXTENSIONS

· Provides a seal against contaminants while extending the valve mouth for convenient access

ASCOT NO.	MFG. NO.	FINISH	EFF. LENGTH
468-00686	686-P	Nylon	.75"
468-00687	687-P	Nylon	1.00"
468-00688	688-P	Nylon	1.25"
468-62410	6241-B	Ni-Plated Brass	.50"
468-62411	6241-M	Ni-Plated Brass	.75"
468-62412	6241-J	Ni-Plated Brass	1.25"
468-62413	6241-G	Ni-Plated Brass	1.50"



® Air Controls Products



468-62411



DOUBLE SEAL CAP

· A time, money and labor saving alternative to common valve caps • Reduce pressure check time by 65% • Designed for high pressure truck tire service • Inflate, deflate or gauge directly thru the DS-1 saving time during inflation and pressure checks • Automatic inflation systems lock right onto the DS-1 • Seals like a high pressure cap, yet offers the convenience of an inflate thru extension • Performs like a check valve, the seal becomes tighter in the event of a core failure • Heat resistant grommets provide additional protection for extended high temperature running • Features tough all metal housing, precision fit brass components and durable self-sealing O-Ring

ASCOT NO.	MFG. NO.	DESCRIPTION
468-04191	DS-1	Double Seal Cap



468-04191 DS-1

DILL TRUCK VALVE EXTENSIONS

• Extensions screw onto the standard .305" valve cap threads of the valve stem and make valve mouth accessible for air service • Available in various lengths

ASCOT NO.		MFG. NO.	EFFECTIVE LENGTH
	STR	AIGHT META	LEXTENSIONS
	468-00330	330	4-1/8"
	468-00331	331	3-1/8"
	468-00341	341	4-7/16"
	468-00346	346	1"
	468-00347	347	3-1/16"
	468-00348	348	5-1/16"
	468-00349	349	6-1/16"
	468-00350	350	2-7/32"
	468-00356	356	1-13/32"

ASCOT NO.	MFG. NO.	BEND ANGLE	EFFECTIVE LENGTH
В	ENT METAI	EXTENSIONS	
468-08028	8028	45°	1-3/8"

468-00347



468-01038

DILL LIGHTWEIGHT TRUCK **VALVE EXTENSIONS**

• Made from nickel plated brass • Provide the additional length necessary to inflate, deflate or gauge tires with valves hidden by decorative wheel covers • Lightweight

ASCOT NO.	MFG. NO.	COLLAR TYPE	EFF. LENGTH
468-01032	1032	Short 3/8"	2"
468-01033	1033	Short 3/8"	2.93"
468-01034	1034	Short 3/8"	3.93"
468-01035	1035	Short 3/8"	5.12"
468-01037	1037	Long 1"	2.93"
468-01038	1038	Long 1"	5.12"
468-01039	1039	Long 1"	6"



DUAL WHEEL EXTENSIONS

· For convenient air service access to inner rear dual wheels • Fit standard valve cap threads and include a clip to secure the extension to the wheel cutout • Can be used on campers, recreational vehicles and light trucks

ASCOT NO.	MFG. NO.	EFF. LENGTH
468-10017	9059-7	7"
468-10019	9059-9	9"
468-10012	9059-12	12"
468-10010	9059-U	12"



468-01039



Valve Caps, Cores & Extensions (cont.)

VALVE ACCESSORIES

ASCOT NO.	TR. NO.	FITS THREAD	FOR USES ON	
HEX NUTS				
468-10013	HN-13	.406"-28	TR570 Series	
468-10004	HN-4	.406"-28	TR416	
468-10117	HN-17	.406"-28	TR509, 510	
468-00808	RW-8	.406"-28	TV500 & TV570 Series	
GROMMETS				
468-10015	RG-15	.625"	TR570 Series	
468-11700	G-170S	.625"	Heat Resistant for TV570	
468-10046	RG-46	.625"	TR509, 510	
468-10039	RG-39	.625"	TR416	
468-10054	RG-54	.453"	TR416	
		O-RING		
468-10060	RG-60	.328"	TR540 Series	







DUAL WHEEL FLEXIBLE VALVE EXTENSIONS

· Provide easy access to the inner dual tire found on campers, recreational vehicles and light trucks • Fit standard valve cap threads

• Come with clamp to secure extension to wheel cutout • 2 extensions per pack and available in steel braided hose



ASCOT NO.	MFG. NO.	DESCRIPTION	EFF. LENGTH
468-30007	FE-300-7	Flexible Extension	7"
468-30010	FE-300-9	Flexible Extension	9"
468-40007	SFE-400-7	Steel Braided Extension	7"
468-40010	SFE-400-10	Steel Braided Extension	10"
468-90597	9059-7	Reinforced Rubber Hose	7"
468-90599	9059-9	Reinforced Rubber Hose	9"
468-95911	9059-11	Reinforced Rubber Hose	11"

HALTEC ALUMINUM **EXTENSIONS**

- Extremely lightweight

ade from a	aluminum		
SCOT NO.	MFG. NO.	COLLAR TYPE	EFF. LENGTH
168-01390	HE-390A	Long	2"
468-01391	HE-391A	Long	2-15/16"
168-01392	HE-392A	Long	5-1/8"
168-01393	HE-393A	Long	6"



HALTEC TRUCK VALVE EXTENSIONS

- **HE-370 SERIES:** Lightweight Extensions have the short collar for use on tube-type valves or tubeless lightweight valves. Has a double seal feature to assure positive seal • HE-390 SERIES: Lightweight Extensions are the same as the HE-370 series except with a long collar • HE-380 SERIES: Standard Style Extensions screw on the standard valve stem (.305"-32" cap thread) and make valve mouth accessible
- Extensions & stabilizers available for Alcoa wheels

ASCOT NO.	MFG. NO.	COLLAR TYPE	EFF. LENGTH
468-00370	HE-370	Short 3/8"	2"
468-00371	HE-371	Short 3/8"	2-15/16"
468-00372	HE-372	Short 3/8"	3-15/16"
468-00373	HE-373	Short 3/8"	5-1/8"
468-00389	HE-389	Long 1"	1-1/16"
468-00390	HE-390	Long 1"	2"
468-00391	HE-391	Long 1"	2-15/16"
468-00392	HE-392	Long 1"	5-1/8"
468-00393	HE-393	Long 1"	6"
468-00394	HE-394	Long 1"	8"
468-00395	HE-395	Long 1"	10"
468-00396	HE-396	Long 1"	12"
468-00397	HE-397	Long 1"	14"
	STAND	ARD STYLE	
468-00381	HE-381	Long 1"	3-1/16"
468-00382	HE-382	Long 1"	5-1/16"
468-00383	HE-383	Long 1"	6-1/16"



BLACK POLYMER VALVE EXTENSIONS

- · Light-weight truck extensions are made of a durable, tough plastic able to withstand the conditions tire valve extensions are exposed to
- They are designed for use where vibration and weight is a concern for valve stem breakage

ASCOT NO.	MFG. NO.	CAP	EFF. LENGTH
468-13500	HE-350	VC-3	2.04"
468-13501	HE-350D	DS-1	2.63"
468-13510	HE-351	VC-3	3.82"
468-13511	HE-351D	DS-1	4.41"
468-13520	HE-352	VC-3	5.21"
468-13521	HE-352D	DS-1	5.80"
468-13530	HE-353	VC-3	5.94"
468-13531	HE-353D	DS-1	6.53"





Special Application Products

HIGH-PRESSURE INFLATING CONNECTIONS

· Connections attach securely by hand or wrench to the valve cap threads of high-pressure valves





468-00556

486-06116

ASCOT NO.	MFG. NO.	DESCRIPTION
468-00556	H-556	Fits .305"-32" Thread Size With 1/8" NPT Male Connection. Has Core Depressor Pin, Copper Sealing Washer. MAX. WORKING PRESSURE: 3000 PSI
468-06116	H-6116B	Fits .305"-32" Thread Size With 1/8" NPT Female Connection With 70° Bend. Equipped With Hard Fiber Sealing Washer. MAX. WORKING PRESSURE: 3000 PSI

CROSSFIRE DUAL™ TIRE PRESSURE **EQUALIZATION SYSTEM**

HOW CROSSFIRE WORKS: Crossfire is a pressure equalizing and monitoring valve that is mounted between dual tires. It bolts easily to the lug, hub cap, or drive axle end. Properly mounted, air freely flows from one tire to the other, maintaining equal tire pressure and load distribution.

• Maximizes tire life • Decreases rolling resistance for increased fuel mileage • Cuts maintenance time due to single-point inflation and the visual pressure gauge • Improves stability, braking and overall safety • Installs in minutes and requires little maintenance • Pays for itself in less than a year · American-made and guaranteed for two years



HIGH-PRESSURE SHOCK/STRUT VALVES

· Constructed of stainless steel bodies for use in high pressure shock absorber units, hydraulic pressure accumulator, surge cylinders and high pressure pneumatic systems

• 1/2"-20 U.N.F. - 3A threads for connection to container







468-07607

468-04361

ASCOT NO.	MFG. NO.	OPERATING PRESSURE	CONFORMS TO	
468-07607	H-7607	2000 PSI	AN-812-1	
468-04361	H-4361	3000 PSI	AN-6287-1	
468-00798	H-798	5000 PSI	MS-28889-2	

468-00798

Over-inflation 20% over-inflation can cause a minimum 10% loss of tire life expectancy

Under-inflation 20% under-inflation

expectancy

can cause a minimum 30% loss of tire life



Proper-inflation Mounted correctly, Crossfire's yellow indicator verifies that air is flowing freely from one tire to the other, equalizing the load

	MFG. NO.	DESCRIPTION
CF-PSI-RH Cro		Crossfire Rubber Hoses
	CF-PSI-HD	Crossfire Heavy Duty Hoses
CF-PSI-ST		Crossfire Stainless Steel Hoses
	SS-PSI-RH	Super Single Rubber Hoses
	SS-PSI-ST	Super Single Steel Hoses

Crossfire valves are available for desired air pressures of 50 to 150 PSI in 5 PSI increments.

Example: CF-100-ST = Crossfire valve, 100 PSI air pressure, stainless steel hose with AT & BH brackets.

TANK VALVES

· Use on pressure containers where gauging or service may be required • Used with various gases, fluids and operating pressures



468-00399







468-00400 468-00401

ASCOT NO.	MFG. NO.	OAL	BASE THREAD	CAP THREAD	HEX SIZE
468-00399	TV-399	1-5/16"	1/8" NPT	.305"-32	7/16"
468-00400	TV-400	1-5/16"	1/4" NPT	.305"-32	9/16"
468-00401	TV-401	27/32"	1/8" NPT	.305"-32	7/16"
468-00402	TV-402	1-5/16"	1/8" NPT	.305"-32	7/16"





Air/Liquid/Agricultural Valves

AIR/LIQUID VALVES FOR TRACTOR AND ROAD GRADER SERVICE



464-00618

ASCOT NO.	MFG NO.	Α	В	BEND ANGLE	VALVE HOLE
464-00618*	TV-618A*	1-7/8"	_	_	.625"
464-01618	TV-618B	1-1/2"	_	_	.625"
464-00718	TV-618RB	1-7/8"	_	_	.625" Rubber
464-00621	TV-621A	1-1/2"	3"	65°	.625"
464-00622	TV-622A	1-3/4"	4-1/2"	90°	.625"
464-00623	TV-623A	1-1/2"	2-1/4"	65°	.625"
464-00619	TV-619A	1-7/8"	_	_	.812"
464-02618	TV-618A-SS	1-7/8"			.625"

^{*}TR618A Made in USA available from Dill

RIM NUTS AND **BUSHINGS**







468-00010

468-00009

ASCOT NO.	MFG. NO.	DESCRIPTION
468-00202	RN-02	Rim Hole Reducer
468-00010	LN-10	Plastic Rim Nut. For Tractor Tube Valves TR-218A, TR-220A
468-00009	B-9A	Bushing Assembly. Fits Over TR-218A, TR-220A Valves For Use In 13/16" Valve Hole. Includes B9 Bushing and LN-13 Nut
468-00006	B-6	Bushing. Fits Over TR-13 Tube Valve When Used in 5/8" Valve Hole

TRACTOR AND GRADER TUBE VALVE

· Valve assemblies with removable core housing for liquid fill • Vulc-on back to allow field repair





467-00218

ASCOT NO.	TR NO.	BASE DIAM.	CORE HOUSING	VERTICAL HEIGHT	VALVE HOLE
467-00218	TR-218A	2-1/2"	TV-CH-3	1-7/8"	.625"
467-00220	TR-220A	2-1/2"	TV-CH-3	2-15/16"	.625"
467-00916	TR916A	3-1/4"	R-372	1-7/8"	.812"

AIR/LIQUID EXTENSION

ASCOT NO.

464-05905

- · Use with tractor or grader valve stems
- 90° angle for more accessible valve





RIM HOLE PLUGS







464-00015

464-00030

ASCOT NO.	MFG. NO.	DESCRIPTION
464-00015	P-15	For Tube-Type Wheels. Used to Plug 5/8" Rim Hole and Avoid Tube Pouching
464-01025	N-1012S	Used to Seal 5/8" Rim Hole When Relocating Valve
464-00030	T-30	Used to Seal 13/16" Rim Hole When Relocating Valve

CORE HOUSINGS







468-00201


468-00203 468-00216

ASCOT NO.	MFG. NO.	DESCRIPTION
468-00201	TV-CH-1	Fits Old Style TR-218, TR220 Valves
468-00203	TV-CH-3	Fits All Fast Flow Air-Liquid Valves Except Super Large Bore
468-00216	TR-CH-16	Fits SP816 Tube Spud and T-81, C-100



VALVE ADAPTER GUN

• 1/2" female pipe thread and attaches to any calcium tire filling **pump** • Extracts valve core from standard bore valve or core housing from tractor valve • Securely holds valve core or core housing up in the gun body during tire filling or evacuation of liquid from a tire





ASCOT NO.	MFG. NO.	DESCRIPTION
464-00310	310	Valve Adapter Gun
464-00134	FP-134	Large Bore Core Remover
464-00135	FP-135	Adapter For Standard Valve
464-00136	FP-136	O-Ring For FP-135 Adapter
464-00137	FP-137	Standard Valve Core Remover
464-00138	FP-138	Ejector Union
464-00139	FP-139	Gasket
464-00140	FP-140	Stem
464-00141	FP-141F	Adapter Body
464-00142	FP-142	Stem Sealing Nut
464-00143	FP-143	O-Ring For FP-142
464-00144	FP-144	Hand Wheel
464-00145	FP-145	Lock Nut
464-00146	FP-146	Teflon Gasket

LIQUID FILL TOOLS



ASCOT NO.	MFG. NO.	DESCRIPTION
464-01091	N-1091	Water Adapter For Liquid Fill Tires
464-10912	N-1091-2	For Water Adapter
464-10913	N-1091-3	For Water Adapter
464-01451	N-1451	1/2" FNPT Coupler for Fluid Use
464-01452	N-1452	1/2" MNPT Nipple for Fluid Use

AQUA QUICK FILL

- To fill a tractor tire or off-the-road tire with liquid without supervision
- Automatically vents excess pressure through side port while tire is filled • Indicates tire is filled by water escaping through vent hole





464-10001

ASCOT NO.	MFG. NO.	DESCRIPTION
464-10001	AQF-1	Aqua Quick Fil



Large Bore Valves

SINGLE BEND SWIVEL VALVES







465-00431

465-00702

465-00710

ASCOT NO.	MFG. NO.	DESCRIPTION
465-00431	K-431	Clamp-In Type Spud. Grommet increases The Sealing Area. Can Be Removed and Replaced Without Dismounting The Tire. Do Not Use In Continuous Service. Temporary Use Only
465-00702	H-41	TR-SP-2 Tubeless Spud. Fits 13/16" Rim Hole Used With All Large Bore Swivel Valves
465-00710	C-10	TR-C-10 Large Bore Screw-In Spud. Screws Into 1/2" NPT Tapped Hole In The Rim. Can Be Replaced Without Dismounting Tire

DOUBLE AND TRIPLE BEND SWIVEL VALVES

- · These valve stems can be used with any of the spuds above
- Any other lengths can be ordered All valves equipped with core and hex cap • On lengths over 6", 2 lock nuts are furnished





ASCOT NO.	MFG. NO.	TR NO.	BEND ANGLE	LENGTH	HEIGHT
	DOUBLE BE	ND SWIV	EL VALVES		
465-00661	WH-70-J661	J-661	82°-8°	4-1/2"	1-5/64"
465-70255	WH-70-J661-10-1/2	_	82°-8°	10-1/2"	1-5/64"
465-70285	WH-70-J661-25-1/2	_	82°-8°	25-1/2"	1-5/64"
465-70280	WH-70-J661-28	_	82°-8°	28"	1-5/64"
465-00664	WH-70-J664	J-664	90°-13°	8-3/4"	1-5/64"
465-70125	465-70125 WH-70-J664-12-1/2		90°-13°	12-1/2"	1-5/64"
465-00667	WH-70-J667	J-667	90°-11°	7-1/2"	1-5/64"
465-71090	WH-71-J-9	_	55°-35°	9"	1-33/64"
465-72212	2212 WH-72-J-21-1/4		70°-20°	21-1/4"	1-5/64"
465-72280	5-72280 WH-72-J-28		70°-20°	28"	1-5/64"
465-73212	465-73212 WH-73-J-21-1/4		60°-30°	21-1/4"	1-3/8"
	TRIPLE BEI	ND SWIVE	L VALVES		
465-00662	WH-75-J662	J-662	90°-20°-20°-	14"	1-5/64"
465-75610	WH-75-J662-10-1/2	-	90°-20°-20°	10-1/2"	1-5/64"
465-00663	WH-75-J663	J-663	90°-8°-8°	25"	1-5/64"
465-00665	WH-75-J665	J-665	90°-13°-13°	32"	1-5/64"
465-00666	WH-75-J666	J-666	84°-6°-31°-31°	20-1/8"	1-5/64"

SINGLE BEND SWIVEL VALVES

· Any other lengths may be ordered • All valves equipped with core and hex cap • On



lengths over 6", 2 lock nuts are furnished • Large bore swivel valves can be used with any of the spuds on this page

ASCOT NO.	MFG. NO.	TR NO.	BEND ANGLE	LENGTH	HEIGHT
465-01418	N-1418	-	74°	1-3/4"	1-5/64"
465-00650	WH-300-J-650	J-650	80°	3-1/8"	1-5/64"
465-00653	WH-300-J-653	J-653	80°	2-1/2"	1-5/64"
465-00657	WH-300-J-657	J-657	80°	4"	1-5/64"
465-30045	WH-300-4-1/2	-	80°	4-1/2"	1-5/64"
465-00658	WH-300-J-658	J-658	80°	5-1/2"	1-5/64"
465-03009	WH-300-9	-	80°	9"	1-5/64"
465-00446	WH-44-6	-	Strt.	6"	1-5/64"
465-40001	WH-45-2-1/2	J-4000-2-1/2	90°	2-1/2"	1-5/64"
465-00454	WH-45-4	-	90°	4"	1-5/64"
465-40002	WH-45-4-1/2	J-4000-4-1/2	90°	4-1/2"	1-5/64"
465-00455	WH-45-5	-	90°	5"	1-5/64"
465-40003	WH-45-6	J-4000-6	90°	6"	1-5/64"
465-40004	WH-45-7-1/2	J-4000-7-1/2	90°	7-1/2"	1-5/64"
465-00458	WH-45-8	-	90°	8"	1-5/64"
465-40005	WH-45-9	J-4000-9	90°	9"	1-5/64"
465-04510	WH-45-10	-	90°	10"	1-5/64"
465-45105	WH-45-101/2	-	90°	10-1/2"	1-5/64"
465-04512	WH-45-12	-	90°	12"	1-5/64"
465-04513	WH-45-13	-	90°	13"	1-5/64"
465-04524	WH-45-24	-	90°	24"	1-5/64"
465-40006	WH-45-28	J-4000-28	90°	28"	1-5/64"
465-40007	WH-45-29-1/2	J-4000-29-1/2	90°	29-1/2"	1-5/64"
465-04530	WH-45-30	-	90°	30"	1-5/64"
465-04532	WH-45-32	-	90°	32"	1-5/64"
465-04536	WH-45-36	-	90°	36"	1-5/64"
465-00651	WH-46-J-651	J-651	90°	4-11/16"	1-17/64"
465-04645	WH-46-4-1/2	-	90°	4-1/2"	1-17/64"
465-00652	WH-47-J-652	J-652	86°	5-1/2"	1-5/64"
465-04745	WH-47-4-1/2	-	86°	4-1/2"	1-5/64"
465-00479	WH-47-9	-	86°	9"	1-5/64"
465-00655	WH-48-J-655	J-655	74°	3-1/8"	1-5/64"
465-00654	WH-49-J-654	J-654	60°	3-1/8"	1-5/64"
465-00659	WH-50-J-659	J-659	90°	3-1/2"	1-57/64"
465-00660	WH-50-J-660	J-660	90°	8-3/4"	1-57/64"
465-00506	WH-50-6	-	90°	6"	1-57/64"
465-00507	WH-50-7-1/2	-	90°	7-1/2"	1-57/64
465-00668	WH-51-J-668	J-668	90°	4-11/16"	5-1/8"
465-00522	WH-52-2	-	25°	2"	1-5/64"
465-00535	WH-53-5-1/2	-	80°	5-1/2"	1-21/64"
465-00546	WH-54-6	-	90°	6"	2-25/64"
465-00552	WH-55-2-1/2	-	90°	2-1/2"	2-25/64"
465-00558	WH-55-8-1/2	-	90°	8-1/2"	2-25/64"
465-00563	WH-56-3	-	65°	3"	1-5/64"
465-00573	WH-57-3	-	80°	3"	1-5/64"
465-00582	WH-58-2-1/2	-	60°	2-1/2"	2-1/8"
465-00656	WH-59-J-656	J-656	90°	3-11/16"	2-5/8"





SPECIAL HYDROFLATING VALVES

- For faster filling of tires with liquid Does not contain valve core
- Straight-through 5/16" opening sealed with special O-ring cap, No. A-151
- Used on loader tire in conjunction with similar large bore air valve

AIR WATER VALVES

· Used in conjunction with WH-330-J-694 large bore valve



ASCOT NO.	MFG. NO.	TR NO.	ANGLE BEND	HORIZONTAL LENGTH	CAP
465-00994	WH-JF-994	JF-994	28°	3.5" (88.9mm)	A-151

TURRET VALVE FOR PLANETARY GEAR WHEELS



ASCOT NO.	MFG. NO.	TR NO.	ANGLE BEND	OFFSET INCHES	LENGTH
465-00690	WH-330-J-690	J-690	2 Bends	9/16"	4-11/16"
465-00691	WH-330-J-691	J-691	18°	-	3-5/16"
465-06911	WH-330-J-691B	J-691	18°	-	8-1/2"
465-00692	WH-330-J-692	J-692	28°	9/16"	4-11/16"
465-00693	WH-330-J-693	J-693	60°	1"	5"
465-00694	WH-330-J-694	J-694	28°	-	3-1/2"
465-00695	WH-330-J-695	J-695	50°	1"	4-1/8"
465-00696	WH-330-J-696	J-696	42°	29/32"	4-1/4"

LARGE RADIUS, HIGH-BEND AIR-VALVE USED WITH 977S

• All valves fit 13/16" valve hole • INCLUDES: A-145 valve core and A-149 cap



LARGE RADIUS, HIGH-BEND AIR/LIQUID VALVE

• Uses super large bore T-81 spud (TR-SP-8) • Uses A-151 cap



ASCOT NO.	MFG. NO.	BEND	LENGTH	HEIGHT
465-97755	977S-5-1/2	90°	5-1/2" (139.7mm)	2" (50.8mm)
465-97711	977S-11	90°	11" (279.4mm)	2" (50.8mm)

VALVE ADAPTERS





468-00100

468-08007

ASCOT NO.	MFG. NO.	DESCRIPTION
468-00100	AD-1	Adapts Large Bore Valve Down To Standard Valve Bore. Fits. 305-32" Valve Core Threads
468-08007	8807N-4	Adapts Large Bore Valve Down To Standard Valve Bore. Fits .485-26" Valve Cap Threads

LARGE BORE CAPS AND CORES



465-00145







465-00148

465-00149

465-00151

ASCOT NO.	MFG. NO.	DESCRIPTION
465-00145	A-145	Large Bore Core (Short). Fits 305-32" Threads
465-00144	A-144	Large Bore Core (Long). Fits .305-32" Threads
465-00148	A-148	Screwdriver Valve Cap. Fits .482-26" Threads
465-00149	A-149	Hex Valve Cap. Fits .482-26" Threads
468-00151	A-151	Air-Water Valve Cap (TR-FC-1). O-Ring Sealing Cap. Used With 465-00994, 465-97755, 465-97711



Large Bore Valves (cont.)

MISCELLANEOUS VALVES





465-00670

465-00671





465-00702

465-06702



465-06703

ASCOT NO.	MFG. NO.	TR NUMBER	DESCRIPTION
465-00670	T-670	_	Loader Tire Valve. Complete With Core, Hex Cap & O-Ring Seal. Thread Size: 1-1/16-12. Height: 1-25/32"
465-00671	H-47	TR-J-671	Tank Valve. Screw-In Type With 1/4" Male Pipe Thread. Complete With Core and Cap. 1-19/32" Length
465-00702	H-41	SP-2	Tubeless Spud. Used With All Large Bore Swivel Valves. Fits 13/16" Rim Hole
465-06702	H-42	TR-J-670-2	Straight Valve. Equipped With Core and Hex Cap. Height Is 1-1/2"
465-06703	H-45	TR-J-670-3	Spud and Valve Complete. Consists Of H-41 & H-42. Height Is 1-5/8"

STANDARD O-RINGS FOR TUBELESS RIMS

- Made of high quality polysoprene rubber Packaged 2 per poly bag, 24 O-rings per case • Manufactured to major OEM specifications
- Arctic style O-ring available (Marked with green ink)



ASCOT NO.	MFG. NO.	ROD DIAM.	SIZE
471-80001	OR-20-JM	0.26"	Hwy (JM Rim) 20"
471-80002	OR-22-JM	0.26"	Hwy (JM Rim) 22"
471-80003	OR-24-JM	0.26"	Hwy (JM Rim) 24"
471-80004	OR-21-T	0.26"	Hwy 21"
471-80005	OR-217-L	0.28"	Grader 17"
471-80006	OR-220-TG	0.26"	Grader 20"
471-80007	OR-224-TG	0.26"	Grader 24"
471-80008	OR-25-T	0.26"	EM 25"
471-80009	OR-321-T	0.385"	EM 21"
471-80010	OR-325-T	0.385"	EM 25"
471-80011	OR-329-T	0.385"	EM 29"
471-80012	OR-333-T	0.385"	EM 33"
471-80014	OR-335-T	0.385"	EM 35"
471-80015	OR-339-T	0.385"	EM 39"
471-80016	OR-343-T	0.385"	EM 43"
471-80017	OR-345-T	0.385"	EM 45"
471-80018	OR-349-T	0.385"	EM 49"
471-80019	OR-351-T	0.385"	EM 51"
471-80020	OR-357-T	0.385"	EM 57"
471-80021	OR-451-T	0.50"	EM 51"
471-80022	OR-457-T	0.50"	EM 57"
471-80023	OR-463T	0.50"	EM 63"
471-80024	OR-232-T	0.26"	EM 32"
471-80025	OR-239-T	0.26"	EM 39"
471-80215	OR-215-H	0.28"	Grader 15"
471-80225	OR-225-T	0.26"	Grader 25"
471-80449	OR-449-T	0.50"	EM 49"
471-80451	OR-451-0VM	0.50"	OVM 51"
471-80457	OR-457-0VM	0.50"	Titan OVM 57"
471-80463	OR-463-OVM	0.50"	OVM 63"
471-80469	OR-469T	0.50"	EM 69"





L-RINGS FOR EARTHMOVERS

· Creates an air seal where the tire bead and rim seat are not completely compatible • Not a cure for damaged beads nor damaged wheels and rims! • CAUTION: Should be used during fitments, do not install where a broken bead is suspected

ASCOT NO.	MFG. NO.	SIZE
471-80112	LR-12	12"
471-80115	LR-15	15"
471-80116	LR-16	16"
471-80120	LR-20	20"
471-80125	LR-25	25"
471-80129	LR-29	29"
471-80133	LR-33	33"
471-80135	LR-35	35"
471-80139	LR-39	39"
471-80145	LR-45	45"
471-80149	LR-49	49"
471-80151	LR-51	51"
471-80157	LR-57	57"
471-80163	LR-63	63"
471-80169	LR-69	69"
471-80149 471-80151 471-80157 471-80163	LR-49 LR-51 LR-57 LR-63	49" 51" 57" 63"





VALVES FOR INNER TUBES · Supplied in straight or bent form ready for installation on tubes • Equipped with A-146 valve coer and A-149 hex cap

• Used with SP-1000 tube spud



ASCOT NO.	MFG. NO.	TR NUMBER	A-ANGLE BEND	B-VERTICAL HEIGHT	C-HORIZONTAL LENGTH
465-01014	LB-216	J-1014	Straight	1-29/32"	-
465-10760	LB-217	J-1076A	Straight	4-5/32"	-
465-10761	LB-218	J-1076B	86°	1-1/8"	3-1/4"
465-10762	LB-219	J-1076C	90°	1-1/2"	2-7/8"
465-10763	LB-220	J-1076D	90°	2-1/16"	2-5/16"
465-10764	LB-221	J-1076E	88°	1-3/8"	3"
465-11750	LB-223	J-1175A	Straight	5-9/32"	-
465-11751	LB-224	J-1175B	82°	1-1/4"	4-1/4"
465-11752	LB-225	J-1175C	88°	1-3/8"	4-1/8"
465-10780	LB-226	J-1078A	Straight	5-25/32"	-
465-10781	LB-227	J-1078B	82°	1-3/8"	4-5/8"
465-10782	LB-228	J-1078C	90°	1-1/8"	4-7/8"
465-11790	LB-229	J-1179A	Straight	6-13/32"	-
465-11791	LB-230	J-1179B	88°	1-3/8"	5-1/4"
465-11792	LB-231	J-1179C	86°	1-1/8"	5-1/2"

LARGE BORE SCREW-ON REPAIR VALVE ADAPTERS FOR INNER TUBES



465-40000

ASCOT NO.	MFG. NO.	DESCRIPTION
465-40000	H-4000	Adapter Converts Tubes having SP-1000 Type Spud To Accept Large Bore Swivel Valves. Equipped With BW-18 Washer and Used With Rim Slots
465-40011	H-4000-1	Same As H-4000 Except Without Bridge Washer and Hex Nut

CLAMP-IN RIM SPUD

• Fits 13/16" diameter valve hole • Can attach to any super large bore valve to the rim through a standard valve hole (13/16" diameter)



464-00208

ASCOT NO.	MFG. NO.	TR NUMBER	DESCRIPTION
464-00208	T-81	TR-SP8	Clamp-In Rim Spud
464-00082	T-82	_	T-82 Clamp-In Rim Spud - 1/4" longer effective length

SCREW-IN RIM SPUDS

• Used to attach any of the super large bore valves to the rim and is designed to screw into a 1/2" NPT tapped rim hole • Can be changed without dismounting the tire



464-00209

ASCOT NO.	MFG. NO.	DESCRIPTION
464-00209	C-100	Effective Length 1/4" Longer

SCREW-IN RIM SPUDS

• 85° bend angle



ASCOT NO.	MFG. NO.	DESCRIPTION	466-00850	466-00851
466-00850	S-85	Fits 1/2" NPT Tappe	ed Rim Hole	
466-00851	S-85-D	Furnished With A Locking Nut With A Teflon Seal So Direction Can Be Reversed		

CORE HOUSING

• Complete with core and cap • Designated at Tire and Rim as the CH-8 • Integral part of the system as the CH-8 is removed from the valve assembly with the IN-80A adapter to utilize the larger opening and the fullest flow of the 6185 check valve









Large Bore Valves (cont.)

CHECK VALVE

• Complete with cap • Permits rapid inflation and deflation • Eliminates need for core housing and inflation adapter • Used with 6190 air chuck

ASCOT NO.	MFG. NO.	TR NO.	DESCRIPTION
466-00860	6185	TR-L-860	Check Valve



466-00860

QUICK CONNECTION INFLATION CHUCK

• Designed specifically for use with 6185 check valve • Sliding sleeve locks air chuck onto check valve and permits unrestricted air flow • Gauging can be done through valve on chuck • Positive air line shut off-valve must be installed in back of air chuck



ASCOT NO.	MFG. NO.	DESCRIPTION
466-06190	6190	Quick Connection Inflation Chuck

SWIVEL ANGLE CONNECTORS

· Component two of the super large bore system is generally a swivel connector that screws onto the spud • Connectors of various angles and lengths are available • Other end of the connector accommodates a MT-3000 flexible extension which attaches to the R-520 core housing of the 6185 check valve





ASCOT NO.	MFG. NO.	BEND ANGLE
466-00525	R-525	90°
466-00685	R-685	85°
466-00625	R-625	80°
466-00675	R-675	75°
466-00660	R-660	60°
466-00529	R-529-5-1/4	90°

SUPER LARGE BORE INFLATOR ADAPTER

• New, safer alternative to IN-80A • Left hand threads on union body — will not come loose when screwing on to valve • New non-removable stem guide • 3/4" pipe thread for easy air hose connection • During inflation, air pressure in the tire can be checked through the stem knob with a tire pressure gauge • Will insert or extract CH-8 or CH-9 core housing · Pressure can be checked without disconnecting with a Large Bore Gauge • 1-piece stainless steel stem and collet • Reduces inflation time 60%, deflation time **80%** • The core housing is held in a stainless steel extractor by a snap ring • Extractor is rugged enough so that the core housing can be loosened or tightened without being damaged • THE IN-100 INFLATOR ADAPTER SAVES TIME BY FAST INFLATION OR DEFLATION ON A TIRE: After removing the valve cap, the inflator is screwed onto the valve stem. The inflator stem is pushed in to engage the flats on the core housing. By rotating the stem counter clockwise, the core housing can be removed without any danger to the person removing it. The core housing is pulled up into the inflator body and held there during inflation or deflation. Can also be used for liquid-filling tires equipped with Super Large Bore valves.







PARTS LIST:

SLB-55L	Ejector Union
MB-55-3	Gasket for G-201
IN-100-1	Adapter Body
IN-100-2	Stem and Collet
G-206	Gasket for Stem Nut

E-3100-10	Stem Sealing Nut
568-207	O-Ring for G-207
IN-100-4B	Hand Knob
464	Lock Nut
Δ-147	Dome Cap

IN-100A	PARTS LIST
E-3100-2A Connector Sleeve	E-3100-12 Hand Knob
IN-100-1A Body for IN-100	E-3100-1A Stem and Collet
IN-100-3A Nut for Connector Sleeve	464 Lock nut
10218 O-Ring	A-147
G-202 Teflon Washer	

ASCOT NO.	MFG. NO.	DESCRIPTION
466-05311	IN-100A	Super Large Bore Inflator Adapte





FLEXIBLE EXTENSION SERIES

- · Flexible extensions are made up in any length to allow the extension to fit the wheel configuration • Specially designed fittings and thermoplastic hose will not fatigue or crush during service • Corrosion problems are eliminated
- Able to customize your extension in the field
- The R-969-K and R-969K-1 kits are available to field assemble your own flexible extensions with the T-620 assembly tool (not shown)







466-03000

RIGID METAL SWIVEL VALVES







466-00890





ASCOT NO.	MFG. NO.	DESCRIPTION
466-00200	M-2000	Swivel Valve Assembly. 90° Swivel Valve - 3-1/8" Horizontal Length
466-00800	MR-800	Swivel Valve: MR-800-Length. Rigid Metal Swivel Valve With R-520 Core Housing And 2B-222 Lock Nuts
466-00890	MR-890	Turret Valve: MR-890. Rigid Metal Turret Type Valve With R-520 Core Housing & (3)B-222 Lock Nuts
466-01850	MR-850	Swivel Valve: MR-850. Same As MR-800 Except With A T-81 Rim Spud

ASSEMBLY KIT FOR SUPER LARGE BORE VALVES-FIELD SERVICE



466-96901

ASCOT NO.	MFG. NO.	DESCRIPTION
466-96901	R-969K-1	Consists Of R-762S Swivel Connector, R-763 Straight Tubing Connector, R-764R (2) Tubing Connector Sleeves and B-222 Nuts (2)
466-96900	R-969-K	Consists Of The Above Plus The R-520 Core Housing Complete With Core and Cap
466-76000	R-760	Extension Tubing Available In 50' and 100' Lengths





Large Bore Valves (cont.)

SUPER LARGE BORE VALVES



ASCOT NO.	MFG. NO.	DESCRIPTION
466-00296	DS-296	Super Large Bore Double Spud Valve Assembly (with Flexible Extension). Designed For Use Where Above Rim Is 7/8". Consists Of DS-210 Double Spud, DS-215 Plug And MT-4000 Flexible Extension
466-04000	MT-4000	Flexible Extension. Used With DS-296 And PB-210. Consists Of: DS-226 Connector, R-763 Connector, (2) R-764R Sleeves, R-760 Tubing
466-07910	S-7910	Valve Support For Super Large Bore
466-08860	S-8860	Valve Support For Large Bore

SUPER LARGE **BORE VALVES**



466-01870

ASCOT NO.	MFG. NO.	DESCRIPTION
466-01066	N-1066	Super Large Bore Loader Valve. Accepts R-520 Core Housing Or Other Super Large Bore Swivel Fittings. Thread Size is 1-1/16"- 12. Super Large Bore Version Of T-670
466-05000	M-5000	Straight Valve Assembly. Screw-In Type Spud With O-Ring Seal. R-521 Core Housings Not Interchangeable In Other SLB Spuds. Thread Size Is 3/4-16"
466-01870	M-1870	Straight Valve Assembly. Super Large Bore Straight Valve Assembly Consists of R-520 Core Housing And T-81 Spud
466-01050	N-1050	Same as M-1870 but with T-82 Spud

SUPER LARGE BORE AIR/LIQUID VALVES

SUPER LARGE BORE TURRET VALVES

• Long super large bore turret valve with 15°

bend • Used on Caterpillar applications





466-01543

ASCOT NO.	MFG. NO.	DESCRIPTION
466-01533	JD-3	6-1/8" Long Super Large Bore Turret - 12° Bend Angle
466-01538	N-1538B	7-7/8" Long Super Large Bore Turret
466-01543	N-1543A	6-1/8" Long Super Large Bore Turret

FOR TRACTOR AND GRADER



ASCOT NO.	MFG. NO.	DESCRIPTION
464-00208	T-81	Fits 13/16" Dia. Rim Holes
464-00216	R-372	Fits T-81, C-100, TRSP 816 Tube Spuds
466-50910	H-50	Components T-81 Spud And R-372 Core Housing





Large Bore Extensions

HAND BENDABLE LARGE BORE EXTENSIONS

• Equipped with 2 lock nuts and 3/4" hex sealing nut • Teflon gasket seals on end of valve; the lead seal in the sealing nut is forced into the threads for a second seal, locking extension to valve • Cap and core not included • Should be removed from valve and transferred to extension

ASCOT NO.	MFG. NO.	EFFECTIVE LENGTH
465-75035	753S-3-1/2	3-1/2"
465-75040	753S-4	4"
465-75045	753S-4-1/2	4-1/2"
465-75080	753S-8	8"
465-75090	753S-9	9"
465-75010	753S-10	10"
465-75115	753S-11-1/2	11-1/2"
465-75120	753S-12	12"
465-75135	753S-13-1/2	13-1/2"
465-75160	753S-16	16"
465-75170	753S-17	17"
465-75175	753S-17-1/2	17-1/2"
465-75180	753S-18	18"
465-75185	753S-18-1/2	18-1/2"
465-75190	753S-19	19"
465-75205	753S-20-1/2	20-1/2"
465-75210	753S-21	21"
465-75215	753S-21-1/2	21-1/2"
465-75225	753S-22-1/2	22-1/2"
465-75235	753S-23-1/2	23-1/2"
465-75245	753S-24-1/2	24-1/2"
465-75250	753S-25	25"
465-75295	753S-29-1/2	29-1/2"
465-75320	753S-32	32"



465-75035

FLEXIBLE LARGE BORE EXTENSIONS

· Made with tough rubber hose and reusable hydraulic type fittings • Equipped with 2 lock nuts and 3/4" hex sealing nut • A Teflon gasket seals on end of valve • The lead seal in the sealing nut is forced into the threads for a second seal, positively locking extension to valve

ASCOT NO.	MFG. NO.	EFFECTIVE LENGTH
465-81080	810F-8	8"
465-81090	810F-9	9"
465-81100	810F-10	10"
465-81200	810F-20-1/2"	20-1/2"
465-81250	810F-25	25"
465-81320	810F-32	32"
465-81400	810F-40	40"



RIGID BRASS LARGE BORE EXTENSIONS

· All-brass extensions used when mounted in straight line with valve • Full length deflector pin opens core in valve when servicing • Equipped with hex cap, 2 lock nuts on extensions over 5" in length

ASCOT NO.	MFG. NO.	EFFECTIVE LENGTH
465-86032	867- 1-1/4	1-1/4"
465-86015	867- 1-1/2	1-1/2"
465-86020	867- 2	2"
465-86025	867- 2-1/2	2-1/2"
465-86030	867- 3	3"
465-86033	867- 3-3/8	3-3/8"
465-86040	867- 4	4"
465-86045	867- 4-1/2	4-1/2"
465-86050	867- 5	5"
465-86059	867- 5-9/16	5-9/16"
465-86060	867- 6	6"
465-86067	867- 6-7/8	6-7/8"
465-86072	867- 7-1/4	7-1/4"
465-86077	867- 7-3/4	7-3/4"
465-86080	867-8	8"
465-86085	867- 8-1/2	8-1/2"
465-86090	867-9	9"
465-86100	867-10	10"
465-86107	867-10-3/4	10-3/4"
465-86120	867-12	12"
465-86125	867- 12-1/2	12-1/2"
465-86160	867- 16	16"
465-86187	867- 18-7/8	18-7/8"
465-86225	867- 22-1/2	22-1/2"
465-86245	867- 24-1/2	24-1/2"



CUSTOM BENT SWIVEL VALVES AND EXTENSIONS

ASCOT NO.	MFG. NO.	OVERALL LENGTH	NO. OF BENDS	TYPE
465-00570	WHG-0570VC	19-31/32"	5	Valve
465-00585	WHD-0585EC	17-15/16"	4	Extension
465-01450	WHG-1450VC	32-7/8"	5	Valve
465-04985	WHG-4985VC	19-3/4"	4	Valve
465-05008	WHD-5008EC	17-13/16"	4	Extension
465-05112	WHG-5112VC	28-3/8"	4	Valve
465-05200	WHG-5200VC	27"	5	Valve
465-05410	WHG-5410VC	31-9/16"	5	Valve
465-05420	WHG-5420VC	33"	5	Valve
465-05922	WHD-5922EC	15-1/4"	5	Extension
465-07103	WHD-7103EC	16-1/4"	4	Extension
465-07601	WHD-7601EC	16-3/4"	4	Extension
465-07602	WHD-7602EC	14-1/4"	4	Extension
465-07940	WHD-7940EC	19"	5	Extension
465-07948	WHD-7948EC	20-5/8"	4	Extension
465-07949	WHD-7949EC	28-7/8"	4	Extension
465-08018	WHG-8018VC	26-3/4"	4	Valve
465-08019	WHG-8019VC	8"	1	Valve
465-08852	WHG-8852VC	18-9/16"	4	Valve
465-09440	WHG-9440VC	27"	5	Valve
465-09470	WHG-9470VC	31-1/2"	5	Valve
465-09903	WHD-9903EC	16-7/8"	4	Extension







Z-Bore Valve System

There are three spud types available: the standard clamp-in spud, a screw-in spud and an angle screw-in spud. There is no temporary outside-in clamp-in spud for Z-Bore. The Z-Bore Valve System is very similar to the Super Large Bore System. By using an O-Ring to seal the clamp-in spud to the rim, a greater flow diameter is created without sacrificing strength or performance. Flows 370 CFM compared to 240 CFM on the Z-Bore Valve System.

7-1 SCREW-IN SPUD

· The screw-in spud is used to attach any **Z-Bore valves to the rim •** Designed to screw into a 1/2" NPT-tapped rim hole • Can be changed without demounting the tire

ASCOT NO.	MFG. NO.	DESCRIPTION
466-70001	Z-1	Screw-In Spud



466-70001

7-2 CLAMP-IN SPUD

• Can attach any Z-Bore valve to the rim through a standard valve hole (13/16") • Fits a 13/16" diameter valve hole • Tire must be dismounted to change spud

ASCOT NO.	MFG. NO.	DESCRIPTION
466-70002	Z-2	Clamp-In Spud



466-70002

Z-13 SCREW-IN SPUD

• The Z-13 screw-In spud screws into the 3/4" NPT-tapped rim hole and converts Mega Bore to Z-Bore

ASCOT NO.	MFG. NO.	DESCRIPTION
466-70013	7-13	Screw-In Spud



466-70013

Z-4 ANGLE SCREW-IN SPUD

• Fits 1/2" NPT-tapped rim hole • 85° bend angle

ASCOT NO.	MFG. NO.	DESCRIPTION
466-70004	Z-4	Angle Screw-In Spud



ANGLE CONNECTOR

· Connectors of various angles and lengths are available • The connector accommodates a flexible extension which attaches to the Z-10 core housing

ASCOT NO.	MFG. NO.	DESCRIPTION
469-70360	Z3-60	60° Angle
466-70375	Z3-75	75° Angle
466-70380	Z3-80	80° Angle
466-70390	Z3-90	90° Angle



466-70390

Z-BORE FLEXIBLE EXTENSIONS

• Made up in any length to allow extension to fit the wheel configuration • Specially designed fittings and thermoplastic hose will not fatigue or crush during service • Corrosion problems are eliminated • Able to customize extension in the field

• ZFAK field assembly kit available to assemble your own

ASCOT NO.	MFG. NO.	DESCRIPTION
466-70700	ZBFE- Length	Flexible Extension
466-70701	ZFAK	Assembly Kit For Z-Bore Valves. INCLUDES: Connector, Z-9 Swivel Connector, Z-7 Straight Tubing Connector, 2x Z2-2 Nuts, 2x Z-9 Tubing Connector Sleeves, Z-10 Core Housing. Z-100 Tubing Is Ordered Separately

7-12L INFLATOR

• To maximize air flow, a Z-12B inflator is used to remove core housing during inflation and deflation • Operates like the IN-100A Super Large Bore inflator

ASCOT NO.	MFG. NO.	DESCRIPTION
466-70012	Z-12L	Inflator



Z-10 CORE HOUSING

• Complete with core and cap • Integral part of the system as the Z-10 is removed from the valve assembly with the Haltec Z-12B inflator to utilize the larger opening and the fullest flow

ASCOT NO.	MFG. NO.	DESCRIPTION
466-70010	Z-10	Core Housing w/Core & Cap





468-00634



PT Valve System

The best way to insure maximum tire life is through proper tire inflation. Using a PT valve and gauge assembly, tire pressure monitoring has never been easier. Use the proper PT gauge for daily checks and a separate master gauge for weekly checks which will prevent air loss before it can cause permanent tire damage. The PT valve and gauge can be used on most Large Bore and Super Large Bore applications.

PT VALVES

· Designed with troublefree, urethane O-rings on the valve barrel • Other valves and sizes available • Assemble the valve to the tire and wheel assembly before installing the PT gauge to the PT valve



AS	COT NO.	MFG. NO.	DESCRIPTION
465	5-00042	PT-H-42	H-42 With PT Grooves & O-Rings
465	5-00456	PT-45-6	WH-45-6 With PT Grooves & O-Rings
465	5-00520	PT-R-520	R-520 With PT Grooves & O-Rings For Super Large Bore
465	5-00524	PT-EX	Large Bore Extension w/1-5/8" Effective length to allow PT Gauge installation on existing valves
465	5-07536	PT-753S-6	753S-6 With PT Grooves & O-Rings
465	5-30060	PT-300-J-650	WH-300-J-650 With PT Grooves & O-Rings
465	5-33031	PT-330-3-1/2	Turret Style Valve With 3-1/2" Effective Length
465	5-33069	PT-330-J-690	WH-330-J-690 With PT Grooves & O-Rings

PT GAUGES

· Easy-to-read dial gauge attaches to the valve • Includes gauge and nut • Calibrated 0-160 PSI • Has an all-anodized aluminum body and is totally sealed to prevent moisture from fogging the glow-in-the-dark dial



ASCOT NO.	MFG. NO.	DESCRIPTION
468-00101	PT Gauge	Digital Passenger Gauge

PTC BLOCK-OFF COLLAR

• For PT valves when gauge is not attached

Can be installed to prevent air leakage

ASCOT NO.	MFG. NO.	DESCRIPTION
468-00580	PTC	5/8" Hex

VALVE CAP

• Valve cap used on PT-style valves • 5/8" hex

ASCOT NO. MFG. NO. DESCRIPTION 468-00150 A-150 Valve Cap





• Also tightens A-150 cap and PTC collar ASCOT NO. MFG. NO.

468-00634

PT VALVE TOOL

DESCRIPTION PT Valve Tool

• Tightens nut to hold PT gauge on valve assembly

LARGE BORE VALVE TOOLS

TL-634





469-06950

469-00680

469-00010

469-01810

469-01710



Valve Hardware Tools



ASCOT NO.	MFG. NO.	DESCRIPTION
469-00014	VT-014	Valve Installation Tool with Rubber Block
469-00040	00040R	Valve Stem Puller with Rubber Boot
469-00992	992	Tubeless Tire And Tire Valve Inserting And Removing Tool. For All Sizes Of Snap-In Passenger Car Tire Valves
469-01124	VT-1124	Tubeless Tire Valve Service Tool. Pull-A- Stem Tool Pulls Old Valves Or Inserts New Valves. Tool Fits All Sizes Or Lengths
469-03333	VT-03P	Plastic Valve Puller with Metal Rod Insert

VALVE CORE INSERTION AND REMOVAL TOOLS




ASCOT NO.	MFG. NO.	DESCRIPTION
469-00001	CT-1	Pocket-Size Valve Core Remover
469-00003	CT-3	Heavy Duty Standard Valve Core Remover
469-00005	CT-5	For Both Standard and Large Bore Valves
469-00607	607	Has Plastic Screwdriver Handle For Better Grip And Leverage
469-01638	1638A	Heavy Duty Professional Plastic Valve Puller. Steel Tube Reinforced Handle Provides Extreme Rigidity. Safety Orange Color For Easy Visibility. Protects Wheels From Damage During Installation/Removal Of Snap-In Valve Stems
469-15407	15407	Angled Tubeless Tire Valve Inserting And Removing Tool



ASCOT NO.	MFG. NO.	DESCRIPTION
469-00612	TL-612	Standard Bore Core Tool. With An Overall Length Of 8" And Oversized Handle
469-00625	TL-625	Standard Bore Core Tool. With Recessed Probe. Fits In Pocket
469-00630	TL-630	Hex Nut Driver. For 500 Series Truck. For Tubeless Clamp-In Metal Valves. For All Lengths of Tubeless Truck Valves
469-00632	TL-632	Truck Extension Service Tool. Tightens Both Metric European And Domestic Type Extensions. Broached To Engage The Metric Hex At The Extension Top and Will Reach The Hex On A 7" U.S.A. Type Extension
469-00633	TL-633	Valve Cap Tool. Easy To Remove And Install Valve. Caps On Inside Dual Wheels. For Aluminum Wheels

SUR-LOCK VALVE **TOOLS**





ASCOT NO.	MFG. NO.	DESCRIPTION
469-00131	TL-131	For Bicycles
469-00132	TL-132	For Cars. 1-3/4" Length
469-00133	TL-133	For Trucks. 8-1/4" Length
469-00134	TL-134	For Large Bore Cores. 10-1/2" Length



VALVE AND CORE TOOLS

ASCOT NO.	MFG. NO.	DESCRIPTION
469-00002	CT-2	Black Heat Treated Heavy Duty Tire Valve Repair Tool. 4-in-1 Standard Valve Tool Repairs Cap Threads, Repairs Core Threads. Easy-Out Feature For Removing Damaged Cores & Removing Standard Caps
469-00012	CT-2E	Economy 4-Way Valve Core Tool (Black)
469-00004	CT-4	Economy Standard Bore 4-Way Tool
469-00011	VT-11	Cable Valve Fishing Tool. Valve Core Wrench And Deflating Pin With Flexible Cable For Fishing Valve Through Rim Hole
469-00018	VSW18	Valve Stem Ratchet. For TR570 Series Valves
469-00020	VSW20	Valve Stem Ratchet. For TR540 Series Valves
469-00021	VT-21	Double-Use Tool. Removes Valve Cores. Screws On Valve Mouth To Open Core
469-00081	TVT-81	Heavy Duty 4-Way Valve Core Tool
469-00567	567A	Core Removing Tool. Screwdriver Grip. Easy Out For Removing Broken Cores
469-00609	TL-609	Chain Valve Fishing Tool. Guides Valve Smoothly Through Rim Hole While Mounting Tire & Tube
469-01115	VT-1115	Valve Core Tool. For Inserting And Removing. Valve Cores. Long Hex Body For Easy Access
469-05262	5262	Tube Deflating Aspirator. Screwing Aspirator Onto Valve Mouth And Applying Air Chuck To Threaded Inlet Creates Vacuum That Siphons Air From Tube
469-11115	VT-1115I	Recessed Valve Core Tool. Core Tool Is Recessed Into The Handle. Design Eliminates The Possibility Of The Tool Poking Through A Shirt Pocket. Easily Fits Into A Shirt Pocket. Includes Clip
469-23430	VG8	Tube Deflator. Removes Air Completely, Quickly After The Valve Core Is Moved. Fits On Every Type Of Standard Bore Valve
469-32850	3285D	Lock-On Screwdriver Core Tool. 5" Effective Length. Allows The Valve Core To Stay Attached To The Tool After It Is Removed From The Valve. Protects The Valve Core From Loss. Aluminum Handles Provide A Sturdy Grip For Inserting And Removing Valve Cores
469-32851	3285E	Lock-On Screwdriver Core Tool. 6.5" Effective Length. Allows The Valve Core To Stay Attached To The Tool After It Is Removed From The Valve. Protects The Valve Core From Loss. Aluminum Handles Provide A Sturdy Grip For Inserting And Removing Valve Cores
469-52000	S-2	Valve Capper Inner Dual Valve Core/Cap Tool
469-00673	673-D	Screwdriver/Core Tool. Lock-On Feature For The Valve Core. Metal Pocket Clip. Flat-Head Screwdriver Tip





Tire Gauges

BRAKE LINING THICKNESS GAUGE

• Made of durable metal • Each blade features both SAE and Metric measurements • Clear and accurate depth readings for a quick and easy reading • Color coded brake gauge provides effective identification • THE SET IS DIVIDED INTO 3 COLORS: Red, Yellow and Green • Red 2 mm (.787") Brakes must be serviced • Yellow 4 mm (.1575") Brakes must be serviced • Made in Taiwan





ASCOT NO.	MFG. NO.	DESCRIPTION
411-97840	BG-97840	3-Piece Brake Lining Thickness Gauge
411-65201	B650201	8-Piece Brake Lining Thickness Gauge

411-65201

TIRE TREAD DEPTH GAUGES





ASCOT NO.	MFG. NO.	DESCRIPTION
454-00190	HT-190L	3-Color All-Metal Tread Depth Gauge
454-00599	595	Tire Tread Depth Gauge. Used To Measure Tire Tread Depth In 1/32" Increments: 0-1"
454-00712	NS712	All Metal Tread Depth Gauge
454-01420	HT-1420	Truck Tire Depth Gauge. Calibrated In mm and 1/32nd of Inch. Measures Shoulder Wear and Tread Depth. Durable Metal Construction
454-01599	599-C	3-Color Tread Depth Gauge
454-05127	5127	Red-Yellow-Green Metal indicator bar with black numbers 0-32In 32NDS



476-10160



1-2% ACCURACY

TPMS BLACK PLATED MASTER TIRE GAUGE

- RANGE: 10-100 PSI in 2-PSI increments
- ACCURACY: ± .5 PSI accuracy Black electro-plated coating • 2-sided plastic bar • Angled chuck head
- Perfect for TPMS applications



476-03501

ASCOT NO. 476-03501

MFG. NO.

3501

DESCRIPTION

Black Plated Master Tire Gauge w/ Angled Chuck - ± .5% Accuracy

AUTOMOTIVE TIRE GAUGES*

· Pencil, chrome tire gauges with nylon indicator bars



ASCOT NO.	MFG. NO.	RANGE	TYPE
476-10105	GA-105	10-50 PSI	Passenger Gauge
476-10115	GA-115	20-120 PSI	High Pressure Gauge
476-10100	GA-100	1-20 PSI	Low Pressure Gauge
476-10110	GA-110M	10-50 PSI	Passenger Gauge 75-340 kP Calibrated in PSI & kPa
476-10120	GA-120M	20-120 PSI	High Pressure Gauge 150-280 kPa Calibrated in PSI & kPa
476-10125	GA-125	5-45 PSI	Air/Liquid Gauge
476-10145	GA-145	10-75 PSI	Mid-Range Gauge 70-500 kP Calibrated in PSI & kPa

^{*} Imprinted gauges available with your name

MASTER TEST GAUGES

- · Used to check accuracy of gauges
- Calibrated 10 -160 PSI

ASCOT NO. MFG. NO. DESCRIPTION 476-10140 GA-140 Master Test Gauge



POCKET TRUCK GAUGES

ASCOT NO.	MFG. NO.	DESCRIPTION
476-10150	GA-150	Straight-On/Angled Gauge. 20 -120 psi. Chrome Plated
476-10160	GA-160	Straight-On/Angled Gauge. 20 -120 PSI. Black Baked Epoxy Protective Finish
476-10130	GA-130	Dual Foot Angled Pencil

TRUCK SERVICE **GAUGES**

- · Wide variety of service gauges to accommodate the numerous tire and wheel configurations encountered by tire service personnel
- Available in chrome plated or protective black epoxy finish as indicated • Calibrated from 10-150 PSI in 2-pound increments
- Nylon or metal indicator bars



ASCOT NO.	MFG. NO.	DESCRIPTION
476-10480	1048T	Dual Chuck Service Gauge, Straight-On/ Angled With Metal Bar, Black Epoxy Finish
476-10135	GA-135	Angle Chuck With Nylon Bar
476-11135	GA-135S	Same As Above, Angle Chuck With Metal Bar
476-10155	GA-155	Straight-On With 30° Reverse Chuck
476-10165	GA-165	Same As Above, Straight-On With 30° Reverse Chuck, Black Epoxy Finish
476-11148	1048S	Dual Straight Service Gauge, Short Length
476-11155	GA-155S	Same As Above, Straight-On With 30° Reverse Chuck, Metal Bar
476-11048	1048-ADJ	Internal Adjustable Field Service Gauge
476-10185	GA-185	Dual Foot Service Gauge With Nylon Bar, 180° Chuck, Chrome Plated
476-11185	GA-185S	Same As Above, Dual Foot Service Gauge With Metal Bar

Why do you need Quality Air Gauges?

Keeping an eye on tire pressure is a critical part of regular inspection and maintenance. Tire pressure is a critical function in many different ways. Underinflated (or grossly overinflated) tires don't handle safely, and if you find yourself in a "steer out of trouble" situation, improperly inflated tires can get you into a lot of trouble. Low tires heat up and can blow out, not only destroying the tire but also putting you in an accident-likely situation.

Keeping tires properly inflated also makes sense from a dollars and sense perspective: Underinflated tires wear out more quickly. Overinflated tires can make the ride rough, and actually wear out suspension parts. And yes, fuel economy is really affected by tire inflation. The solution to these safety and money issues is as simple as regularly checking tire inflation, and for this you need an accurate tire pressure gauge.

GOOD BETTER BEST

1-2%
ACCURACY

ACCURACY

BEST

-5%
ACCURACY

A QUICK GUIDELINE FOR OUR GAUGES
IS SHOWN WITH THE PRODUCTS
IN THE SECTIONS BELOW



DIGITAL TIRE GAUGES

• Large, easy-to-read LCD numbers for precise readings • Features pinpoint accuracy, convenient air bleed, protective casing • Features dual foot chuck • Reads 3 to 160 PSI

ASCOT NO.	MFG. NO.	DESCRIPTION
476-10500	DT-105	Digital Passenger Gauge
476-15038	DT150-38CV	Digital Truck Gauge

DIGITAL TREAD DEPTH GAUGE

• Made from strong carbon fiber composite • Zero setting in any position

• Metric, decimal inch and fraction inch toggle • Large LCD display

MFG NO DESCRIPTION ASCOT NO 454-00209 NS209S Digital Tread Depth Gauge

DIGITAL TRUCK TIRE GAUGE

• OPERATING RANGE: 0-180 PSI • ACCURACY: +/- 1% + 0.5 PSI at 100 PSI • Auto power off, simple operation • Built-in backlight with clear, large LCD display

ASCOT NO. MFG. NO. DESCRIPTION Digital Truck Tire Gauge 476-03238 N/A

DIGITAL POCKET GAUGE

• RANGE: 0-150 PSI in .5 PSI increments • ACCURACY: ±1% PSI accuracy

• Large LCD display • Red backlight • Angled chuck head

ASCOT NO. MFG. NO. DESCRIPTION 476-32380 3238P Digital Pocket Gauge w/ Angle Chuck - 1-150 PSI

DIAL GAUGE

Calibrated 0 to 160 PSI in 5 PSI units and 150 to 1100 in kPa metric scale

• 14" flexible hose • Holds pressure readout until released

DESCRIPTION ASCOT NO. MFG. NO. 476-00274 GA-274 Dial Gauge. 0 -160 PSI

DIAL GAUGE W/ EXTENSION HANDLE & BLEEDER VALVE

• 18" Standard & Large Bore Gauge w/Extension • Handle & bleeder valve • Calibrated 0-160 PSI in 5 PSI increments

ASCOT NO. MFG. NO. DESCRIPTION 476-00276 Dial Gauge w/ Extension Handle & Bleeder Valve - 0-160 PSI

STANDARD AND LARGE BORE AIR/LIQUID MASTER GAUGE

• Straight-on air chuck fits both standard and large bore valves • Calibrated to 0 to 160 PSI in 1 PSI increments and 0-1100 in kPa metric scale • Has recalibration feature and replaceable filters

DESCRIPTION ASCOT NO. MFG. NO. Standard and Large Bore Air/Liquid Master Gauge 476-00290 GA-290

LARGE BORE DIAL AIR GAUGE

• 15" Large Bore Air Gauge with built-in filter and accessible reservoir for easy cleaning

ASCOT NO. MFG. NO. DESCRIPTION 476-30377 GA300-377 Large Bore Dial Air Gauge



Tire Gauges (cont.)



DIGITAL TIRE PRESSURE GAUGE

• OPERATING RANGE: 4-100 psi • Automatically shuts off after 30 seconds of non-use to save battery life • Easy-grip handle features innovative material to ensure gauge is held properly for the most accurate reading



ASCOT NO.	MFG. NO.	DESCRIPTION
476-05900	5900	Digital Tire Pressure Gauge
476-05988	5988	Digital Tire Pressure Gauge w/ Backlight

DILL ADJUSTABLE TRUCK TIRE GAUGES

1-2% ACCURACY

ASCOT NO.	MFG. NO.	DESCRIPTION
476-07125	7125H	Straight and 30 Degree Reverse, Chrome, White Nylon Bar
476-07233	7233	360 Deg. Swivel for Standard and Large Bore
476-07262	7262	Straight and 30 Degree Reverse, Black, Black Metal Bar
476-07275	7275RB	Adjustable Truck Service Gauge with 25 Degree Offset Angle Chuck (Internally Adjustable)
476-07285	7285R	Dual Foot Service Gauge With Reverse Angle Chuck (Internally Adjustable)
476-17275	7275RBE	Adjustable Truck Service Gauge with 25 Degree Offset Angle Chuck (Externally Adjustable)
476-17285	7285E	External Adjustable Truck Service Gauge
476-27275	7275	Dual Angle, Chrome, Black Metal Bar
476-37285	7285	Straight and 30 Degree Reverse, Chrome, Black Metal Bar



ADJUSTABLE FIELD SERVICE GAUGES

• Field adjustable truck service gauges • External Adjustment Screw makes calibration quick & easy • Adjustable Calibration • Plated finish provides corrosion protection and great looks • 4-sided metal indicator bar is durable and easy to read • Hang-up ring provides a convenient method of storage • Flat-head screwdriver required for calibration



ASCOT NO.	MFG. NO.	DESCRIPTION
476-00135	135S-RCL	Adjustable Dual Foot Service Gauge
476-00165	165S-RCL	Adjustable Dual Foot Service Gauge
476-00185	185S-RCL	Adjustable Dual Foot Service Gauge -180 Degree Reverse Chuck
476-00250	250S-RCL	Adjustable Large Bore Pencil Gauge
476-00255	255S-RCL	Adjustable Large Bore Swivel Gauge
476-01046	1046-ADJ	Screwdriver Adjustable Calibration Gauge
476-11048	1048-ADJ	Internal Adjustable Metal Bar Gauge



MASTER AIR GAUGE CHECKING STATIONS

- INFLATION RANGE: 0-200 PSI ACCURATE TO: ±1 PSI Designed to allow users to quickly and accurately check their air gauges and inflator gauges
- THREE CHECKING POINTS: standard valve port, large bore valve port & female coupler port • Most accurate checking station on the market • Equipped with a regulator and filter for proper air and water filtration • CARB Certified
- Back-lit readout for ease of use Can be mounted to a bench or a wall



ASCOT NO.	MFG. NO.	DESCRIPTION
476-35020	TS3502A	Digital Gauge Checking Station
476-35021	TS3502AL	Air/Liquid Gauge Checking Station



MASTER TEST GAUGE

• For checking accuracy of service and pencil gauges • Has dual foot chuck and a retaining valve to hold pressure reading after gauge is removed from valve to within +/- 2% of total dial reading • Includes protective case • MADE IN THE USA







476-08860

DILL AIR GAUGE CHECKING STATIONS

· A quick accurate way for tire dealers to check the accuracy of air gauges - a must for facilities that need to comply with California standards • 0-160 psi liquid filled gauge • Access valve mounted on a pressure reservoir • 1/4 inch NPT filter/regulator to remove contaminants from compressed air • A certificate of accuracy for ISO records • Designed to easily bolt to a wall or table • MADE, TESTED & CERTIFIED IN THE USA



ASCOT NO.	MFG. NO.	DESCRIPTION
476-03502	3502	Replacement Digital Air Gauge
476-08500	8500	Dill Air Gauge Checking Station (With large bore port)
476-08501	8500D	Dill Digital Air Gauge Checking Station (With large bore port)
476-08900	8900	Replacement Dial Air Gauge (Fully Calibrated)







Proudly made in the USA









DILL USA DUAL FOOT TRUCK GAUGES



DILL USA TRUCK SERVICE GAUGES

DILL USA PENCIL GAUGES[†]

ASCOT NO.	MFG. NO.	RANGE	DESCRIPTION	FINISH	QTY./PACK
476-05602	5600-CH-USA*	10-75 PSI	Chrome Finish Gauge	Chrome	10
476-05603	5600-ST-USA*	10-75 PSI	Standard Silver Gauge	Aluminum	200
476-05604	5600-CF*	10-75 PSI	Classic Camouflage Gauge	Camouflage	10
476-07212	7212-USA*	20-120 PSI	High Pressure Gauge	Chrome	10
476-07213	7213-USA*	10-50 PSI	Passenger Car Gauge	Chrome	10
476-07215	7215-USA	20-120 PSI	High Pressure Gauge	Gold	10
476-07226	7226H*	20-120 PSI	Small Diameter Straight Chuck - Fits Standard and Large Bore	Chrome	10
476-07229	7229-USA*	1-20 PSI	Low Pressure 1/2 PSI Units	Chrome	10
476-07230	7230-USA*	5-45 PSI	Air Liquid Gauge	Chrome	10
476-07277	7277-USA*	10-75 PSI	Assorted 10 Colored Pencil Display Pack	Chrome	10
476-07290	7290-USA*	20-90 PSI	Standard Blue Pencil Gauge	Blue	200
476-01941	941-USA*	20-120 PSI	High Pressure Gauge	Silver	10

[†] Red, blue, green, gold, purple and grey colors available.

DILL USA DUAL FOOT TRUCK GAUGES

A	SCOT NO.	MFG. NO.	RANGE	DESCRIPTION	FINISH	QTY./PACK
47	76-07248	7248-USA*	20-120 PSI	Dual Angle Foot Chuck	Chrome	10
47	76-07263	7263-USA*	20-120 PSI	Straight-On 30° Reverse Chuck	Black Powder	10
47	76-07278	7278-USA*	20-120 PSI	Straight-On 30° Reverse Chuck	Chrome	10

DILL USA TRUCK SERVICE GAUGES

ASCOT NO.	MFG. NO.	RANGE	DESCRIPTION	FINISH	QTY./PACK
476-00001	SG1	10-150 PSI	Dual Foot Head; Chrome Body with Black Markings on a White Bar	Chrome	1
476-00002	SG2	10-150 PSI	Dual Foot Head; Chrome Body with White Markings on a Black Bar - Adjustable	Chrome	1
476-00003	SG3	10-150 PSI	Dual Foot Head; Black Powder Coated Body with White Marking on a Black Bar - Adjustable	Black Powder	1

^{*} Denotes gauges meet the proposed California Regulation for Under Inflated Vehicle Tires No. 95550.







Dill USA Chucks

Proudly made in the USA





478-62930



478-62931

MADE IN THE



478-62932



DILL USA AIR CHUCKS

ASCOT NO.	MFG. NO.	LENGTH	DESCRIPTION	FINISH	QTY./PACK
478-06172	6172-USA	6"	Angle Chuck for Inner Dual Wheels with Tilted Valves	Chrome	10
478-06173	6173-USA	6"	Lock Feature Straight-On 180° Degree Reverse Angle Chuck	Chrome	10
478-06174	6174-USA	14"	Extra Long Length Lock Feature Straight and 30° Reverse Angle Chuck	Chrome	10
478-16174	6174-BLK-USA	14"	Extra Long Length Lock Feature Straight and 30° Reverse Angle Chuck	Black Powder	10
478-06175	6175-USA	6"	Lock Feature Straight-On 30° Reverse Angle Chuck	Black Powder	10
478-06176	6176-USA	6"	For Standard Air Line Service	Chrome	10
478-06999	6999-USA	6"	Straight with 30° Reverse Angle Chuck	Chrome	10
478-16999	6999L-USA	6"	Same as 6999-USA Except for Lock-On	Chrome	10







ASCOT NO.	MFG. NO.	DESCRIPTION
478-00335	CH-335	Angled Chuck. Plated Finish (Normally Closed)
478-01330	6568-FT	Dual Foot Chuck. 1/4" FPT, 6" Long, Lock-On Threads (Normally Open)
478-01335	CH-335-OP	Angled Chuck. Plated Finish (Normally Open)
478-01350	CH-350-L0	Straight-On/Angled Chuck. Protective Black Epoxy Finish (Normally Closed)
478-01351	6568T-FT	Straight-On/Angled Chuck. Black Epoxy Finish (Normally Open)
478-01352	6568TL	Dual Foot Black Chuck 14" (Normally Closed)
478-03300	CH-330-L0	Straight-On/Angled Chuck. With Lock- On Threads (Normally Closed)
478-03301	CH-330	Straight-On/Angled Chuck (Normally Closed)
478-03330	CH-333-LO	Straight-On/Angled Chuck. 14" Long (Normally Closed)
478-03370	CH-370-L0	Straight-On/180° Chuck. 1/4" NPT (Normally Closed)
478-06585	6585LB	Large and Standard Bore Chuck. 1/4" NPT (Normally Closed)

ANGLE HEAD AIR CHUCKS

ASCOT NO. MFG. NO. 478-03238 Angle Head Air Chuck - Chrome Finish



BALL FOOT CHUCKS



ASCOT NO.	MFG. NO.	DESCRIPTION
478-00305	CH-305	Ball Foot Chuck. 1/4" Female Thread (Normally Closed)
478-00315	CH-315	Ball Foot Chuck With Lock-on Clip. 1/4" Female Thread (Normally Closed)
478-00325	CH-325	Ball Foot Chuck With Lock-on Clip. 1/4" Female Thread (Normally Open)
478-05451	_	Ball Foot Chuck With Lock-on Clip. 1/4" Female Thread (Normally Closed - Alligator)
478-00707	_	Replacement Washer. For 478-05451 Ball Foot Chuck
478-04500	_	Air Chuck Clip. For All Ball Foot Chucks
478-04501	_	Economy Clip for Clip-On Ball Foot Air Chuck

EUROPEAN-STYLE CLIP-ON CHUCKS

ASCOT NO.	MFG. NO.	DESCRIPTION	478-06293
478-00001	N-1200	European-Style Clip-On Chuck. for 1/4" I.D. Hose. Silver (Norma	
478-02985	CH-360	European-Style Clip-On Chuck. Fitting. Silver Clip (Normally Clo	
478-02995	CH-360-0P	European-Style Clip-On Chuck. Fitting. Black Clip (Normally Op	
478-06293	6293-S	European-Style Clip-On Chuck. Fitting. Straight Clip Chuck. Smi Silver Clip (Normally Open)	

LOCK-ON AIR CHUCKS

ASCOT NO.	MFG. NO.	DESCRIPTION
478-00340	CH-340	Lock-On Air Chuck. 1/4" NPT Female Thread. Securely Locks Onto Valve When Sleeve Is Pushed Forward
478-01340	CH-340-OP	Lock-On Air Chuck. Available For Use With Tire Changers
478-05265	H-5265	Lock-On Air Chuck. Specially Designed To Lock Onto The Cap Of A Standard Bore Valve Stem When The Sliding Sleeve Is Pushed To Forward Position



478-00340



478-05265





REVERSE ANGLE LOCK-ON AIR CHUCK

· Reverse angle lock-on chuck allows easy access to outer dual valve



478-			

ASCOT NO.	MFG. NO.	DESCRIPTION
478-00345	CH-345	Reverse Angle Lock-On Air Chuck (Normally Closed)
478-01345	CH-345-OP	Reverse Angle Lock-On Air Chuck (Normally Open)



TRUCK LOCK-ON EXTENSION CHUCK

- Extended reach for dual wheels Easy on/off application
- Steel pins for increased service life Automatic locking design
- Improves seal on flow through caps 22" overall length



LONG REACH STRAIGHT LOCK-ON CHUCK

ASCOT NO.	MFG. NO.	DESCRIPTION
478-00346	CH-346	Long Reach Straight Lock-On Chuck (Normally Closed)
478-01346	CH-346-OP	Long Reach Straight Lock-On Chuck (Normally Open)

478-00346

EUROPEAN-STYLE CLIP-ON CHUCK



478-02975

ASCOT NO.	MFG. NO.	DE
478-02975	CH-360S	Eu

SCRIPTION

European-Style Clip-On Chuck. 1/4" Female Fitting - With Spring Loaded Deflector Pin

ASCOT NO. 478-32072

MFG. NO. 3207I-L2 DESCRIPTION Truck Lock-On Extension Chuck



Air Chucks (cont.)



ASCOT NO.	MFG. NO.	DESCRIPTION
454-01410	N-1410	Off-Highway Tire Tread Depth Gauge. Calibrated With 32nds And MM. Magnified Sight Glass For Easy Readability
454-05131	5131	Large Bore Tread Depth Gauge
454-05300	5300	Tire Tread Depth Gauge w/ Magnifying Lens - Calibrated with 32nds & MM
476-02555	GA255S-RCL	Recalibrateable Large Bore Swivel Gauge. Nickle Plated Brass. Metal Slide Bar. Calibrated 10-150 PSI in 2 lb. Units. Swivels 360° for Those Hard-to-Reach Valves
476-07233	7233	Dill Swivel Gauge
476-10240	GA-240	Straight-On Gauge. 20 - 120 PSI
476-10250	GA-250S	Swivel Gauge. Nickel Plated Brass. Plastic Bar. Calibrated 10 - 150 PSI In 2 lb. Units. Swivels 360° For Those Hard-To-Reach Valves
476-10255	GA-255S	Swivel Gauge. Nickel Plated Brass. Metal Slide Bar. Calibrated 10 - 150 PSI In 2 lb. Units. Swivels 360° For Those Hard-To-Reach Valves

LARGE BORE AIR CHUCKS





478-06190

ASCOT NO.	MFG. NO.	DESCRIPTION
478-00322	322	Large Bore Dual Foot Air Chuck. 45° Chuck For Easy Access To Valve. 1/4" NPT Female Thread
478-00326	326	Screw-On Air Chuck458"-26 Internal Thread. 1/2" NPT External Thread. Full Flow For Seating Of Tire Beads
478-00328	AC-B10	Short Lock-On Air Chuck. Locks On Valve When Cocked On Threads. Greater Air Flow And Seat Cannot Be Blown Out If Seal Fails. 1/4" NPT Thread
478-00377	AC-B11	Long Lock-On Air Chuck
478-04660	AC-B12	Clip-On Air Chuck. Locks Onto Valve When Sleeve Is Pushed Forward, Releases When Sleeve Is Pulled Back. 1/4" NPT Female Thread
478-06190	6190	Quick Connection Inflation Gauge. For Use With 6185 Check Valve. Sliding Sleeve Locks Chuck Onto Check Valve. Permits Unrestricted Air Flow
478-10013	10013	Large Bore Screw-On Chuck. Fits 3/8" ID Air Hose

477-11612

Inflator Gauges



MULTI-GAUGE SCALE:













Hang Point

Dual Angle Chuck

MFG. NO.

ASCOT NO.

477-10312

Multi-Scale Gauge

DESCRIPTION

Digital Inflator w/ 20" Hose and Hold-On Air Chuck

RPG

AUTOMATIC INFLATOR

· All the features of a wall mounted inflator in a portable hand held unit • BUILT-IN **OVERPRESSURE SETTING FUNCTION** • Auto on/off operation • MAX INFLATION: 174 PSI • Accuracy exceeds EC Standards • Multi-scale gauge • Serial/batch numbered • Backlit digital display • Wire sheathed hose eliminates kinking • Tough poly carbonate/ABS body • Two programmable pre-set preset buttons • Fast and safe 5' hose with lock-on chuck • Built-in rechargeable lithium-ion battery • Up to 15 hours of continuous use • Includes AC adapter for charging & certificate of calibration

ASCOT NO. MFG. NO. DESCRIPTION 477-11612 11.0612NA



RPG DIGITAL TIRE INFLATORS

• INFLATION RANGE: 0-174 PSI • ACCURATE TO: ± 1.2 psi • Auto ON, upon air pressure sensing • Large tilted LCD display with backlight and 90 second auto OFF • Multi-scale gauge • Die-cast aluminum unit with rubber protective sleeve • Lightweight handle and trigger • Wire sheathed hose on flex area of hose to eliminate kinking

ASCOT NO.	MFG. NO.	DESCRIPTION
477-11235	11.0723ASC5	RPG Digital Inflator: 20" Hose w/ Clip-On Chuck
477-11237	11.0723ASC7	RPG Digital Inflator: 6' Hose w/ Clip-On Chuck
477-11239	_	Replacement 6' Hose w/ Clip-On Chuck for Digital Inflato
477-11240	-	Replacement 20" Hose w/ Clip-C Chuck for Digital Inflators



Inflator Gauges (cont.)



• ACCURATE: Measures in PSI (0-255), kPa (0-1800), kg/cm2 (0-18), and Bar (0-18). Meets ANSI/ASME B40.1 standards • GAUGE **SWIVELS:** Reads at any angle, lays flat in your toolbox. Gauge protected by rubber boot • BACKLIT DISPLAY: Auto-on when tire pressure is detected; Auto-off after inactivity to save battery • EASY HANDLING: Durable/ergonomic

grip. Quick fine tuning in case you exceed the target pressure • 6" STRAIGHT

FOOT CHUCK: Full swivel and hose w/threaded lock-on design, enabling hands-free inflation





DIGITAL HAND-HELD TIRE INFLATOR*

- INFLATION RANGE: 0 174 PSI • ACCURACY: +/- .2 PSI
- 6' Hose Lightweight shock-resistant design
- High specification ceramic sensor • Long life, easily replaceable battery
- · Available in custom hose lengths and chuck styles • Valve has provisions for checking air pressure during inflation • Threaded for 1/4" male NPT hose fittings



ASCOT NO MFG NO DESCRIPTION

477-10001 Accura 1 Digital Hand-Held Tire Inflator

* This gauge provides more accurate air pressure readings which is essential with TPMS.

ASCOT NO. MFG. NO. DESCRIPTION

477-00577 S-577D Pro Digital Tire Inflator - 15" Hose w/ Lock-On Threads

PRECISION DIGITAL TIRE **INFLATOR**

· Most accurate pressure gauge on the market (0-160 PSI), Extreme ± 0.05% Accuracy • EASY-TO-READ **DIGITAL DISPLAY:** Large articulating easy to read digital display that is easy to read in any light condition, at any angle, display automatically adjusts for left or right handed use, or vertical portrait mode • High contrast electrophonic screen • AUTO **ON/OFF FEATURE:** Powers on when air presser is detected, power off after 120 seconds of inactivity • Deflation button • Job site work light, valve cap holder, integrated hang hook for storage



MK4 HEAVY DUTY HAND-HELD INFLATOR

• NEW VIEWING WINDOW: Larger window gives 20% greater field of viewing • LIGHTER WEIGHT: Gauge body weighs 2.035lbs, less work strain and easier for repetitive use • BIOMORPHIC SHAPE: Ergonomic, easier to use and less prone to damage when dropped • **NEW VALVE MECHANISM:** Simplified 2-stage mechanism design prevents user having to "push" against full line pressure on deflate preventing fatigue • NEW

PISTON & SEAL DESIGN:

New design, less drag, reduced friction & less movement inertia means no internal corrosion, no sticking and no skewing of accuracy • NEW CLEAR LITHOGRAPHIC **DESIGN:** Fast and accurate reading of results

• MAXIMUM INFLATION PRESSURE: 160 PSI

477-10004

NFW **PISTON** & SEAL **DESIGN**

ASCOT NO. MFG. NO. DESCRIPTION 477-00587 S-580e-KIT Precision Digital Tire Inflator - Dual Foot Chuck ASCOT NO. MFG. NO. DESCRIPTION

477-10004 MK4 MK4 Heavy Duty Hand-Held Inflator

WARNING: Never inflate a tire on a multi-piece rim (a rim made up of 2 or more separate pieces) unless the tire and rim are mounted in OSHA regulation 29-CFR Part 1910.177 or D.O.T. approved tire inflation cage. OSHA Regulations require that an inflator gauge must be equipped with a lock-on chuck and have a hose extension sufficiently long for the operator to stand clear of the possible trajectory of a multi-piece rim.



ASCOT NO.	MFG. NO.	DESCRIPTION
477-76023	7260-2-6293E	Digital Inflator - 2 Ft. Hose - Clip-On Chuck
477-76029	7260-2-6999FT	Digital Inflator - 2 Ft. Hose - Straight Chuck
477-76063	7260-6-6293E	Digital Inflator - 6 Ft. Hose - Clip-On Chuck
477-76069	7260-6-6999FT	Digital Inflator - 6 Ft. Hose - Straight Chuck

HEAVY DUTY HOSE INFLATOR

· Has two separate clip-on chucks with fivefoot hoses • One chuck, CH-360, fits standard bore valves and the other, H-4660A, large bore valves • Has springloaded, hand-operated valve and has provisions for checking air pressure during inflation • Threaded for 1/4" male NPT hose fittings

TWO

SEPARATE **CLIP-ON CHUCKS**



ASCOT NO. MFG. NO. DESCRIPTION 477-00404 1-404 Heavy Duty Hose Inflator

DILL DIGITAL INFLATORS W/ STAINLESS

STEEL HOSE

· Two-foot, kinkresistant, stainless steel hose • Large backlit display • Auto on/off feature • Dual foot or Clip-on Made in the USA air chuck

 Assembled and tested in the USA



ASCOT NO.	MFG. NO.	DESCRIPTION
477-72623	7260-S2-6293E	Digital Inflator - 2 Ft. Stainless Steel Hose - USA-Made Clip-On Chuck
477-72629	7260-S2-6999FT	Digital Inflator - 2 Ft. Stainless Steel Hose - USA-Made Dual Foot Chuck

CHUCK TIRE INFLATOR GAUGES

• ACCURATE: Performance-tested and calibrated. Measures in pounds per square inch (PSI, 10-160, 2-lb. increments) • Kilopascal readings also available per special order (kPa, 80-840, increments of 20) • DUAL **HEAD CHUCK:** Makes tire valves more accessible with the two heads for easier access • DURABLE, **EASY-TO-USE INFLATOR:** Heavy-duty construction, magnifying window lens, full-swivel chuck, 15-inch hose • REPLACEABLE PARTS: Gauge and valve cartridges can both be replaced



DURABLE

& EASY

TO USE



ASCOT NO.

477-00506

477-00516

MFG. NO.

S-506

S-516

Inflator Gauges (cont.)



AIR LINE INFLATORS

- · Ideal for gauging and inflating dual tires on trucks and buses as well as passenger cars and light trucks
- · Solid brass indicator bar
- · Allows operator to stand away while inflating and deflating tires
- Bleeder valve allows user to adjust tire pressure without touching either the tire or valve stem

STANDARD #	HAND HELD #	DIGITAL BODY #	DESCRIPTION
	AIR LIN	E INFLATOI	RIGAUGE
477-00001	477-20001	477-30001	12" Hose w/ Dual Foot Chuck
477-00011	N/A	477-30011	12" Hose w/ Tapered Chuck
477-00111	477-20111	477-30111	12" Hose w/ Lock-On Chuck
477-01111	477-21111	477-31111	12" Hose w/ No Chuck
477-11111	N/A	N/A	12" Hose w/ Lock-On Chuck & Bleeder Valve
	SAFET	Y INFLATOR	GAUGE
477-00002	477-20002	477-30002	3' Hose w/ Ball Foot (Clip-On) Chuck
477-00003	477-20003	477-30003	3' Hose w/ Straight Lock-On Chuck
477-00004	477-20004	477-30004	6' Hose w/ Ball Foot (Clip-On) Chuck
477-00005	477-20005	477-30005	6' Hose w/ Straight Lock-On Chuck
477-00008	477-20008	477-30008	9' Hose w/ Ball Foot (Clip-On) Chuck
477-00009	477-20009	477-30009	9' Hose w/ Straight Lock-On Chuck
477-00010	477-20010	477-30010	12' Hose w/ Ball Foot (Clip-On) Chuck
477-00012	477-20012	477-30012	12' Hose w/ Straight Lock-On Chuck
477-00014	477-20014	477-30014	6' Hose w/ No Chuck
477-00015	477-20015	477-30015	15' Hose w/ Straight Lock-On Chuck
477-00020	477-20020	477-30020	20' Hose w/ Straight Lock-On Chuck
477-00033	477-20033	477-30033	3' Hose w/ Euro- Style Chuck
477-00066	477-20066	477-30066	6' Hose w/ Euro- Style Chuck
477-00099	477-20099	477-30099	9' Hose w/ Euro- Style Chuck
477-00112	477-20112	477-30112	3' Hose w/ No Chuck

3' Hose w/ Sleeve Chuck

6' Hose w/ Black Epoxy

9' Hose w/ No Chuck 12' Hose w/ Euro-Style Chuck

12' Hose w/ No Chuck

Lock-On Chuck





Safety Inflator Gauge with Ball Foot (Clip-On) Chuck







Air Line Inflator Gauge

LARGE BORE AIR LINE **INFLATOR GAUGES**

• Large Bore inflation unit with in-line gauge • Equipped with AC-B12 large bore chuck • Gauge is calibrated 10-140 PSI in 2 lb. increments • Available in hose lengths of 6', 9' & 12' • 477-01006 Similar to Haltec I-409







ASCOT NO.	DESCRIPTION
477-01006	6' Hose with AC-B12 Large Bore Chuck
477-01009	9' Hose with AC-B12 Large Bore Chuck
477-01012	12' Hose with AC-B12 Large Bore Chuck
477-01025	25' Hose with AC-B12 Large Bore Chuck



477-20113

477-20115

477-20118

477-20144

477-21112

477-30113

477-30115

477-30118

477-30144

477-31112

477-00113

477-00115

477-00118

477-00144

477-01112

4-WAY INFLATOR KIT

• Quick coupler connects directly to the inflator • Slide valve allows air supply to be turned on/off • Includes all USA hoses and connection

INCLUDES

25' HOSES & CONNECTION



4-WAY INFLATOR **ACCESSORY BLOCK**

- Lightweight aluminum manifold splits air lines into 4 seperate lines
- Slide valve turns air on/off to start inflation
- (4) 1/4" universal quick couplers allow for any type fitting
- 3' whip hose



ASCOT NO.

DESCRIPTION

477-11624

4-Way Inflator Accessory Block



6-IN-1 AIR LINE MANIFOLD KIT

· Lightweight aluminum manifold

• 1/4" air inlet

• (3) 1/4" aluminum plugs



DESCRIPTION

6-in-1 Air Line Manifold Kit

MFG. NO. DESCRIPTION 477-11623 11.0623NA 4-Way Inflator Kit SUPPLY CORPORATION LARGE BORE INFLATION GAUGE 477-00409 · Large bore inflation unit with in-line gauge • Equipped with H-4660A chuck and 6' hose • Gauge calibrated 10-120 PSI (70-800 kPa) in 2 PSI increments ASCOT NO. MFG. NO. DESCRIPTION

477-11623



477-00409

• (6) 1/4" outlets

ASCOT NO.

477-47732

Large Bore Inflation Gauge

Inflator Gauges (cont.)



INFLATOR SYSTEM

• 1/2" ball valve with dial gauge for checking pressure • Equipped with safety coupler for releasing pressure in case of emergency • 1/2" NPT connection • 3/8" ID for maximum air flow

ASCOT NO. MFG. NO. DESCRIPTION 477-35020 I-350-20 Inflator System

INFLATOR SYSTEM

• 1/2" ball valve with dial gauge for checking pressure • Equipped with safety coupler for releasing pressure in case of emergency • 1/2" NPT connection • 3/8" ID for maximum air flow

ASCOT NO. MFG. NO. DESCRIPTION 477-34020 I-340-20 Inflator System

INFLATOR SYSTEM

· Safely removes operator away from blast zone by using the 15' hose • Shut-off valve (ball valve) enables operator to stop inflation for proper tire inspection • Includes IN-95 and three additional unions to adapt different sizes, such as SLB, MB & ZB

ASCOT NO. MFG. NO. DESCRIPTION 477-49515 I-495-15 | Inflator w/ 15' Hose









S57 Tool & Sensor Bundle

S57 Tool Features:

- Programs EZ-sensor® and other programmable TPMS sensors
- Reads, activates & relearns all known TPMS sensors in the market
- Clears, retrieves and decodes TPMS Diagnostic Trouble Code (DTC) information
- Offers quick & convenient software updates through WIFI
- Comes with 5 years of software updates





BUNDLE PN 21057-S57EZGO100

INCLUDES:

100 x EZ-sensor® GO PN 33560 and NEW S57 TPMS Diagnostic Tool





- Industry Leading Customer Service
- World Class Training
- 24/7 TPMS Tech Support





Combines 314.9 MHz, 315 MHz & 433.92 MHz All in ONE Sensor



FREE wifi Updates, Built-in Relearns, OBDII Reset & VIN/TIN Image Capture

Bluetooth*

YOUR ONE-STOP SOURCE

FOR ALL YOUR TIRE & WHEEL SERVICE NEEDS



Tire Changers & Accessories

Wheel Balancers & Accessories

Lifts

Rubber Blocks

Lift Pads

Rolling Jacks

Work Stations

SERVICE C





Ascot Supply Tire Changer

MANUAL TIRE CHANGER

- Small tire changing system for lawn & garden, ATV and other small tires/wheels
- Not for passenger tires
- Adjustable to accomodate multiple tire/wheel sizes
- High quality, energy saving & environmentally friendly
- Portable and equipped with professional accessories
- Can be operated easily without the use of power or pneumatic supplies
- Works for an impressive range of tires
- Great for family and commercial garages, racing teams, emergencies and any time a convenient changer is required

OPTIONAL BASE PLATE FOR MANUAL TIRE CHANGER

- Optional base plate is sold seperately
- Base plate eliminates anchoring to the floor and provides a non-slip surface for the technician
- Base plate dimensions: 24" x 30"
- 12 gauge steel (2.5 mm)





ASCOT NO.	MFG. NO.	DESCRIPTION
441-00202	BJ-CO2	Ascot Supply Manual Tire Changer
441-00002	BJ-CO2-BASEPLATE	Optional Base Plate for Manual Tire Changer





CEMB Tire Changers

SM628BPS ADVANCED SWING ARM TIRE CHANGER WITH **BEAD PRESS SYSTEM**

• Quick-change steel mount head with plastic protectors and polymer mounting head • Selfcentering, dual clamping cylinder heavy duty turntable • Clamp up to 32" diameter rims and tires up to 44" diameter • Heavy-duty 220V, 1Ph phase inverter, constant torque two-speed (8-15rpm) 220V 3Ph motor • High-Performance BPS (Bead Press System) for simple servicing of stiff side wall tires • Press cone kit allows simple push down external rim clamping • Lower bead roller demounts tires without using the mounting head • Adjustable two-way high-power bead breaker side-shovel with protector sleeve • Two stage tire inflation • Jaw-placed jets and tire inflator includes accumulator safety limiter

SM645HPA PERFORMANCE TILT BACK TIRE CHANGER WITH HPA BEAD PRESS

- Automatic tilt-back mount-demount arm re-positions for next wheel without adjustments
- Heavy-duty 110V motor with high torque, handles the difficult sidewall tires and deep drop center rims • Bead breaker shovel: Adjustable to the correct angle to fit diameter and width of tire • Two-stage tire bead sealing inflation jets • Tire inflator includes safety limiter • HPA two-sided press arm system is a must have for simple servicing of stiff sidewall tires and deep drop center rims • Includes press arm, press follower and two tire lifter discs • Optional polymer mount head kit

SM825 SWING ARM PASSENGER & LIGHT TRUCK TIRE CHANGER

AIR TANK

IN TOWER

- Air tank in tower Dual clamping cylinders
- Semi-automatic swing arm Inflator jets on each clamp • Inserts protect aluminum wheels • Adjustable bead breaker

ARM



CEMB TIRE CHANGER SPECIFICATIONS

443-62801

ASCOT NO.	MFG. NO.	POWER SUPPLY	INSIDE CLAMPING	OUTSIDE CLAMPING	MAX TIRE OUTSIDE	BEAD BREAKER FORCE	MAX RIM WIDTH	GROSS SHIPPING WEIGHT
443-62801	SM628BPS	220VAC	14" - 27"	11" - 24"	44"	6393 lb.	15.5"	630 lb.
443-64501	SM645HPA	110VAC	14" - 26"	12" - 24"	47"	6790 lb.	13.5"	1050 lb.
443-91825	SM825	110 VAC	15" - 26"	13" - 24"	47"	5500 lb.	15"	630 lb.

▲WARNING: For more information go to www.P65Warnings.ca.gov.

443-64501





Corghi Tire Changers

A20241TI 2-SPEED TILT BACK TIRE CHANGER

• Ideal for all OEM and aftermarket wheels • Preferred market choice for reliablity and long lasting performance

A2030 2-SPEED TILT BACK TIRE CHANGER

• Ideal for all OEM and aftermarket wheels • Preferred market choice for reliablity and long lasting performance





CORGHI TIRE CHANGER SPECIFICATIONS

ASCOT NO.	MFG. NO.	POWER SUPPLY	INSIDE CLAMPING	OUTSIDE CLAMPING	MAX TIRE OUTSIDE	MAX RIM WIDTH	GROSS SHIPPING WEIGHT
443-01274	A2024TI	115V/1ph/60hz	12"-26"	10"-24"	40"	26"	600 lb.
443-18134	A2030	115V/1ph/60hz	12"-28"	10"-26"	43"	28"	620 lb.



AM50 LEVERLESS TIRE CHANGER

• Leverless design allows it to easily handle the toughest tire and wheel combinations in the market today • Dynamic bead breaking discs & newly designed head

AM500 AUTOMATIC TIRE CHANGER

• Leverless design allows it to easily handle the toughest tire and wheel combinations in the market today • Dynamic bead breaking discs & newly designed head

AM5000 TIRE CHANGER

• The Touchless system keeps the working tools away from the wheel making OEM, Low Profile, and Run Flat tires simple, safe and fast to change • The wheel lift and helper arm are standard



CORGHI TIRE CHANGER SPECIFICATIONS

ASCOT NO.	MFG. NO.	POWER SUPPLY	INSIDE CLAMPING	OUTSIDE CLAMPING	MAX TIRE OUTSIDE	MAX RIM WIDTH	GROSS SHIPPING WEIGHT
443-05034	AM50	110V/1ph/50hz	_	_	47"	30"	760 lb.
443-08234	AM500	110V/1ph/50hz	_	_	47"	32"	980 lb.
443-18834	AM5000	110V/1.31ph/50-60hz	_	_	47"	28"	1290 lb.

▲WARNING: For more information go to www.P65Warnings.ca.gov.





AM26J ARTIGLIO MASTER TIRE CHANGER

• The Touchless system keeps the working tools away from the wheel making OEM • Low profile, and run flat tires simple, safe and fast to change • The wheel lift and helper arm are standard • Dual bead breaker • Bead depressor

AM28 ARTIGLIO MASTER TIRE CHANGER

- The Touchless system keeps the working tools away from the wheel making OEM
- New demounting tool head Dynamic bead breaking device • Rapid demounting procedure • Universal wheel clamping system
- Adjustable working height Wheel lifter to effortlessly place wheels onto turntable

ARTIGLIO MASTER CODE TIRE CHANGER

- The Touchless system keeps the working tools away from the wheel making OEM
- Automatic wheel dimension acquisition enabling automatic tool positioning
- Touch screen system to guide user through all procedures and solutions
- · Compatible with all tire types



CORGHI TIRE CHANGER SPECIFICATIONS

ASCOT NO.	MFG. NO.	POWER SUPPLY	INSIDE CLAMPING	OUTSIDE CLAMPING	MAX TIRE OUTSIDE	MAX RIM WIDTH	GROSS SHIPPING WEIGHT
443-08514	Mastercode	110V/1.31ph/50-60hz	_	_	47"	32"	1,675 lb.
443-16234	AM26J	110V/1.31ph/50-60hz	_	_	40"	26"	1080 lb.
443-16235	AM28	230V/0.98 kW/50 Hz	-	-	40"	28"	970 lb.





A9222 SWING ARM TIRE CHANGER

- Turntable with two pneumatic cylinders capable of clamping any types of rim securely
- Extractable pedal controls for easy inspection of control area • User-friendliness, reliability and high performance are the characteristics that make the A9222 ideal for users who need a versatile tool at an extremely competitive

A9824 2-SPEED SWING ARM TIRE CHANGER

• Built for high volume shops at an affordable price • Designed to handle passenger, light truck and motorcycle wheels

A9830 2- SPEED SWING ARM TIRE CHANGER

• Built for high volume shops at an affordable price • Designed to handle passenger, light truck and motorcycle wheels



CORGHI TIRE CHANGER SPECIFICATIONS

ASCOT NO.	MFG. NO.	POWER SUPPLY	INSIDE CLAMPING	OUTSIDE CLAMPING	MAX TIRE OUTSIDE	MAX RIM WIDTH	GROSS SHIPPING WEIGHT
443-92220	A9222	110V/1ph	13"-25"	10"-22"	42"	3.5"-12.5"	760 lb.
443-01764	A9824	115V/1ph/60hz	12"-26"	10"-24"	47"	26"	600 lb.
443-19004	A9830	115V/1ph/60hz	12"-28"	10"-26"	47"	28"	635 lb.

▲WARNING: For more information go to www.P65Warnings.ca.gov.



844-16572

Tire Changer Accessories





COATS REPLACEMENT AIR HOSE

• For use with Coats Tire Changers • 60" long x 1/4" diameter • AC-1 Euro-style chuck • All brass connectors • Swivel fitting • Packaged 1 per bag



ASCOT NO. 127-86871

MFG. NO. DESCRIPTION 86871-1 60" x 1/4" Coa

60" x 1/4" Coats Replacement Air Hose

RIM CLAMP BEAD LIFTING TOOL

- Designed for ease of lifting the bead during the tire changing operation
- 20" overall length Made from a durable chromevanadium material

444-81354

ASCOT NO. MFG. NO. 444-81354 TC181354

TC181354 Rim

DESCRIPTION

Rim Clamp Bead
Lifting Tool

LONG SOCK FOR BEAD LIFTING TOOL

- High quality plastic sleeve prevents the rims from scratching while lifting the bead Made from high quality, durable nylon
- Ribbed design for anti-slip contact

ASCOT NO.

444-22019



MFG. NO.

220019

HUNTER REPLACEMENT AIR HOSE

• 60" long x ¼" diameter • European -style air chuck • All brass connectors • Packaged 1 per bag

		S. C.
	127-86872	
1		

ASCOT NO. 127-86872

MFG. NO.

DESCRIPTION

Hunter Replacement
Air Hose

LOW PROFILE BEAD LEVER TOOL

DESCRIPTION

Long Sock for Bead Lifting Tool - 4 Pack

• Angled design and extra-long length provide increase leverage • Super-grip knurled handle for increase grip • Durable high strength carbon steel contruction • Reduces strain on user's hand and wrist • Provides technician better control of the tool against stiff side walls • Helps protect against damaging expensive wheels



ASCOT NO.	MFG. NO.	DESCRIPTION
437-00001	TS-1	11" OAL x 2" Swab Diameter
437-00002	TS-2	15" OAL x 2" Swab Diameter
437-00003	TS-3	18" OAL x 3" Swab Diameter
437-13014	313014	Hunter-Style Tire Lubricating Brush
844-16259	106259	Lube Bottle. Rim Clamp*. Fits RC-15, RC-20, 5060 and 5070 Series Tire Changers
844-16572	106572	Lube Bottle. Center-Post. Fits 4040, 4040SA and 4050 Tire Changers



'WING' MOUNT/DEMOUNT HEAD

For use with Hunter tire changer • Molded wing guides the tire bead into the drop center • Prevents the tire from moving above the knuckle • Faster and easier mounting process

ASCOT NO. MFG. NO. DESCRIPTION

444-01226 JRP11-8-11400327 Wing' Mount/Demount Head

ADAPTER KIT FOR 'WING' MOUNT/DEMOUNT HEAD

Allows for compatibility with all Coats X-Series and RC Series tapered shaft • ADAPTER ONLY -Duckhead sold seperately • Lightweight aluminum design • Precision CNC manufactured

ASCOT NO. MFG. NO. DESCRIPTION

444-01227 J760-424-B33CW | Adapter Kit for 'Wing' Mount/Demount Head

NYLON MOUNT/DEMOUNT HEAD ONLY

Replacement For Accuturn 20024335 • Use With Models 7700, 8910, 8911, 8922, 8944, and 8989 • Replacement For Hofmann 20024335 • Replacement For FMC/John Bean EAA 24335 • For Use On EHP Series Tire Changers • Replacement For Snap-On 24335. For Use On All Models • Head Only

ASCOT NO. MFG. NO. DESCRIPTION

444-01228 TC20024335 Nylon Mount/Demount Head Only

BRACKET W/ HARDWARE FOR MOUNT/DEMOUNT KIT

Bracket & Screw Kit for TC14024784 Duckhead kit • Facilitates conversion from metal head to plastic head • Pairs with TC20024335 Duckhead • Black steel construction

• Bracket is reusable when Duckhead is replaced • Precision machined

ASCOT NO. MFG. NO. **DESCRIPTION**

444-01229 TC200250000 Bracket w/ Hardware for TC14024784 Mount/Demount Head Kit

NYLON TOOL HEAD FOR HUNTER TIRE CHANGERS

Replacement For Hunter RP6-710014120 • For Use On TCA34 With Serial Number 664 And Above • Tool Head For Hunter TCA34 Tire Changers

ASCOT NO. DESCRIPTION MFG. NO.

444-01230 TC14120 Nylon Tool Head for Hunter Tire Changers

NYLON MOUNT/DEMOUNT HEAD FOR COATS. **CORGHI & HUNTER TIRE CHANGERS**

Application chart below:

OEM	Part Number	Tire Changer
All Tool	G3008403	All models
Coats	83008403	RC1, 5, 10, 15, 20 Early 5060, 9010, 9024, APX90
Corghi	450310	All rim clamp (optional accessory)
Giuliano	3008403	Shaft must be turned 180° for this head to work
Hofmann	8314813	All earlier models except 1550, 1620, 1625
Hunter	RP11-8314813	TCX Series (RP11-5-400-100 Adapter required) TCX500 Requires Upgrade Shaft & Adapter Kit
Sice	8314813	M39, S40, S41, S42, S43, S45, S408MAXI, S435, S436, S436TOP

ASCOT NO. MFG. NO.

444-01222 TC450310 Nylon Mount/Demount Head for Coats, Corghi & Hunter Tire Changers

RED PLASTIC HUNTER MOUNT/DEMOUNT HEAD

Larger channel for difficult wheels • Specifically designed for low profile tires For Hunter TCA34 tire changers • Application chart below:

OEM	Part Number	Tire Changer
Hunter	221-675-2	TC250, TC300, TC325, TC350, TC2000, TC3250, TC3500
	221-675-2-B	TC250, TC300, TC325, TC350, TC2000, TC3250, TC3500
ASCOT NO. 444-01224	MFG. NO.	DESCRIPTION Red Plastic Hunter Mount/Demount Head











NYLON MOUNT/DEMOUNT HEAD, COATS & HUNTER STYLES

ASCOT NO.	MFG. NO.	DESCRIPTION
444-01220	TC183061-A	Nylon Mount/Demount Head (Coats Style)
444-01221	VT-1221	Nylon Mount/Demount Head (Hunter Style)

GREY NYLON DUCKHEAD

- Grey nylon mount/demount head kit for low profile tires
- · Use with difficult wheels
- COMPATIBLE WITH THE COATS TIRE CHANGERS: 5030, 5040, 5050, 5060, 5065, 6050, 6060, 6065, 7050, 7055, 7060, 7065, 7655, 7660, 7665

ASCOT NO.	MFG. NO.	DESCRIPTION
444-01223	TC184432	Grey Nylon Duckhead Kit for Coats Tire Changers

STAINLESS STEEL DUCKHEAD FOR COATS TIRE CHANGERS

- Tapered stainless steel mount/demount head used on many Coats tire changers
- For steel wheels and high-volume shops dealing mostly with OEM passenger cars and light trucks
- FOUND ON COATS MODELS: 5030, 5040, 5045, 5050, 5060, 5065, 5070, 6050, 6060, 6065, 7050, 7055, 7060, 7065, 7655, 7660, 7665, 70XEH1, 70XEH2, 70XEH3
- · Includes the set screws for adjusting the angle

ASCOT NO.	MFG. NO.	DESCRIPTION
444-01225	TC182788	Stainless Steel Duckhead for Coats Tire Changer

PLASTIC RIM PROTECTORS FOR COATS STAINLESS STEEL MOUNT/DEMOUNT HEADS

- Designed for COATS stainless steel mount/demount heads
- Made from a durable plastic material to prevent marring or scratching
- Available in packs of 2 or 12

ASCOT NO.	MFG. NO.	DESCRIPTION
444-82961	TI182961	2-Pack of Plastic Rim Protectors for Coats Stainless Steel Mount/Demount Head
444-82963	TI182963	12-Pack of Plastic Rim Protectors for Coats Stainless Steel Mount/Demount Head



444-01225

444-82961, 444-82963





CEMB Heavy Duty Tire Changers

CM27T HEAVY DUTY TRUCK TIRE CHANGER

- For tube and tubeless type tires used on over-the-road Class 8 commercial trucks and some off-road tractor tires and rims
- · The pivoting four-jaw clamping chuck aids as a wheel lift and prevents liabilities of manual truck tire changing by allowing the machine to perform all the heavy lifting and service work
- · Mobile cable control unit
- · Bi-directional rotation





SM56T HEAVY DUTY TIRE CHANGER

- For tube and tubeless tires used on heavier off-road farm and commercial use tractors
- · Mobile cable control unit
- · Two speed hydraulic pump motor
- · Bi-directional rotation · Self centering universal

wheel chuck

- · Self-centering four jaw clamping jaw drive system which doubles as a wheel lift
- · Rim pliers and rim lever standard



CEMB HEAVY DUTY TIRE CHANGER SPECIFICATIONS

ASCOT NO.	MFG. NO.	POWER SUPPLY	RIM CLAMPING RANGE	MAX TIRE OUTSIDE	MAX TIRE WIDTH	MAX TIRE WEIGHT	BEAD BREAKER FORCE	SHIPPING WEIGHT
446-00027	CM27T	220 VAC	13" - 27"	63"	30"	3300 lbs.	4100 lbs.	1415 lbs.
446-00056	SM56T	220 VAC	14" - 46"	90.5"	42"	3300 lbs.	6000 lbs.	2000 lbs.

▲WARNING: For more information go to www.P65Warnings.ca.gov.





Corghi Heavy Duty Tire Changers

HD700 HEAVY DUTY TIRE CHANGER

• For demounting and mounting inner tube and tubeless type tires for trucks, buses and industrial vehicles with annular groove or elastic ring type rims • Can be used to work easily on any rim size up to 26"

HD1300 HEAVY DUTY TIRE CHANGER

• Extremely compact dimensions for working with complete peace of mind on truck, agricultural machine and earth moving machine wheels • Features a sturdy and robust operated tool arm

HD1300R HEAVY DUTY TIRE CHANGER (WIRELESS)

• Extremely compact dimensions for working with complete peace of mind moving machine wheels • Features a



CORGHI TIRE CHANGER SPECIFICATIONS

ASCOT NO.	MFG. NO.	POWER SUPPLY	MAX TIRE OUTSIDE	MAX RIM WIDTH	GROSS SHIPPING WEIGHT
443-01804	HD700	208 vac +/-10%,3 ph., 30 amp circuit	63"	26"	1500 lb.
443-03504	HD1300	208 vac +/-10%,3 ph., 30 amp circuit	86"	56"	2450 lb.
443-03514	HD1300R	208 vac +/-10%,3 ph., 30 amp circuit	86"	56"	2450 lb.

HD1400 HEAVY DUTY TIRE CHANGER

• Semi-automatic tire changer • Capable of handling tire widths of up to 58" and a maximum wheel weight of 4189 lb. • Electrichydraulic operation • Features the START & STOP function, guaranteeing notable energy savings while the machine is not being used

MONSTERAGTT HEAVY **DUTY TIRE CHANGER**

- Significant reduction in strain High protection of rims and tires • High performance • Maximum safety
- Reliable universal application

HD1800 HEAVY DUTY TIRE CHANGER

· Works on mining, forestry and agricultural wheels and tires up to 118" and 6,600 lb. • Cordless remote control • Automatic tool head



CORGHI TIRE CHANGER SPECIFICATIONS

ASCOT NO.	MFG. NO.	POWER SUPPLY	MAX TIRE OUTSIDE	MAX RIM WIDTH	GROSS SHIPPING WEIGHT
443-00409	HD1400	208 vac +/-10%,3 ph., 30 amp circuit	98.5"	58"	2960 lb.
443-04002	HD1800	208 vac +/-10%,3 ph., 30 amp circuit	118"	50"	5350 lb.
443-01504	MonsterAGTT	208 vac +/-10%,3 ph., 30 amp circuit	98"	58"	3500 lb.



CEMB

CEMB Digital Wheel Balancers

ER72 DIGITAL WHEEL BALANCER

Professional digital wheel balancer especially designed for tire dealers • Automatic Distance & Diameter Entry with Width Sonar (3D)
Fully automatic Spotter Laser System for best correction possible • Full-time accuracy with Static unbalance always displayed on screen • LED to light the work space inside the rim • New automatic arm to measure automatically diameters up to 30" • Standard locking with Quick Nut • Electromagnetic brake for easy weight placement • Available 110VAC or 220VAC • Wide working space • Direct selection ounces/grams • Optimization program for compensation of rim and tire unbalance • One Button Split & Hidden Weight Program

ER75 DIGITAL WHEEL BALANCER

- A high volume RFV diagnostic wheel balancer, which comes in two variations, uniquely uses advanced balancing features such as Dynamic AutoAdaptive with One-Plane Balancing and RFV measurement combined with HubMatch
 All the best features from CEMB balancers
- are combined with HubMatch to ensure the assembly is round when rolling on the vehicle
 The ER75TD is available with either manual locking or pneumatic locking One Plane

Balancing; Offers a single ideal correction plane, indicating the exact point within the rim where the wheel can be balanced. Minimizing both static and dynamic unbalance, using a single counterweight thus saving time •

HubMatch* balancing clocks the RFV high point of the assembly to the vehicle hub

EZ10 3D DATA ENTRY WHEEL BALANCER

- Space-Saver wheel balancer Exclusive direct weight placement 3D inner data entry arm uses 3D Virtual Sonar and AutoAdaptive enhancement software to provide a faster, higher quality wheel balance service
- Eliminates the time and hassle of caliper rim width data entry Motorized, fast 5-second average cycle time High quality, robust design, extremely accurate balancing with a simple to use interface Electro-magnetic brake holds wheel steady for easier weight placement Handles steel and custom wheels with choice of clip-on, tape weight and hidden spoke modes up to 30" rim diameter Great for small garages, repair shops or back
- Great for small garages, repair shops or back up to larger machines 110v, 50/60 Hz.



ASCOT NO. 481-00072

MFG. NO. ER72 DESCRIPTION
ER72 Digital
Wheel Balance

ASCOT NO. 481-00075

MFG. NO. ER75

DESCRIPTION
ER75 Digital

ASCOT NO. 481-00010

MFG. NO.

DESCRIPTION EZ10 3D Data Entry Wheel Balancer



CEMB

CEMB Digital Wheel Balancers (cont.)

C212 MOTORIZED DIGITAL TRUCK WHFFI BALANCER WITH PNFUMATIC LIFT

• C212 balances steel & light alloy wheels of cars, light & heavy commercial trucks and bus thanks to a 40mm shaft and a large assortment of adaptors and cones standard • Pneumatic stationary brake useful during wheel mounting and counterweight application • Pedal operated pneumatic lift (soft type) enables excellent centering accuracy of the wheel on the shaft • Automatic Distance & Diameter Entry (2D) • Fully Automatic Cycle with Breaking • 51" wheel guard • Self-Diagnosis and Self-Calibration • MENUS FOR QUICK SELECTION OF THE FOLLOWING: Inches to millimeters, unbalanced thresholds 0.1 or 0.25 ounces (1 or 5g) • Direct selection ounces/grams • Optimization program for compensation of rim and tire unbalance • "Static" program-plus 4 ALU programs for PAX, light alloy or special shaped rims • One Button Split & Hidden Weight Program • Direct weight location program (no repositioning of stick-on weights)





C206 MOBILE HAND SPIN TRUCK WHEEL BALANCER

• Mobile Hand Spin Truck Wheel Balancer for cars and light & commercial trucks • C206 balances HD truck and bus tires as well as light truck and car tires • Portable for mobile service when 12VDC available • Automatic Distance & Diameter Entry (2D) • Standard lightweight battery pack for use when power not available • Self-Diagnosis and Self-Calibration • MENUS FOR QUICK SELECTION OF THE FOLLOWING: Inches to millimeters. unbalanced thresholds 0.1 or 0.25 ounces (1 or 5g) • Direct selection ounces/grams Optimization program for compensation of rim and tire unbalance • "Static" program—plus 4 ALU programs for PAX, light alloy or special shaped rims • One Button Split & Hidden Weight Program • Direct weight location program (no repositioning of stick-on weights)



ASCOT NO. 481-00212

MFG. NO. C212

Motorized Digital Truck Wheel Balancer with Pneumatic Lift

⚠WARNING: For more information go to www.P65Warnings.ca.gov.

481-00206

C206

DESCRIPTION

Mobile Hand Spin Truck Wheel Balancer



SERVICE EQUIPMENT

Corghi Wheel Balancers

EM9250 LED DISPLAY WHEEL BALANCER

• Compact design • More programs and features than competitive LED display units



The display and weight tray.

EM9280 MONITOR DISPLAY WHEEL BALANCER

- Balancing with monitor, compact and essential with professional performance
- LCD MONITOR: High resolution graphics and dedicated software
- SMART-ARM: Electronic input of wheel diameter and distance with FSP function which automatically activates the balancing programs, avoiding keypad selection AWD AUTOMATIC SENSOR (Auto width Device): For contactless measurement of wheel width Quick and intuitive sensitivity calibration

ET88 WHEEL BALANCER

- Top-of-the-range balancing machine for truck wheels • Low balancing speed, optimization of average balancing speed • 7 ALU truck and car programs
- Automatic acquisition of wheel/ machine distance • Adhesive weight application device • Stunning userfriendly graphic interface • Automatic wheel weight application position search • Visual wheel wobble inspection
- Automatic identification of fitted wheel (truck/car) • OPT FLASH and 200kg lift with safety handle





EM9550 PLUS LED DISPLAY WHEEL BALANCER

- Larger design More programs and features than competitive LED display units • Wheel dimension detection with digital gauge • Automatic wheel positioning • LED light to brighten the work area
- Quick application of adhesive counterweights
- Manual wheel clamping w/quick ring DISPLAY PANEL: High resolution graphics • AWC (Auto Width Calculation): Reduced wheel data entry time with the AWC function which suggests the most probable width value • WEIGHT TRAY: Many large trays to house counterweights and various tools • Inclined front side for operator access

· Space-saving wheel guard





EM9580 PLUS MONITOR DISPLAY WHEEL BALANCER WITH SONAR

• Balancing with monitor, compact and essential with professional performance • LCD MONITOR: High resolution graphics and dedicated software

• SMART-ARM: Electronic input of wheel diameter and distance with FSP function which automatically activates the balancing programs, avoiding keypad selection • AWD AUTOMATIC SENSOR (Auto Width Device): For contactless measurement of wheel width • Quick and intuitive sensitivity calibration • Sonar included







CORGHI TIRE CHANGER SPECIFICATIONS

▲WARNING: For more information go to www.P65Warnings.ca.gov.

ASCOT NO.	MFG. NO.	POWER SUPPLY	MAX TIRE OUTSIDE	GROSS SHIPPING WEIGHT
443-09557	EM9550	110V-1ph-60hz	44"	440 lb.
443-09587	EM9580	110V-1ph-60hz	44"	440 lb.



SERVICE EQUIPMENT

EM9980C PLUS DIAGNOSTIC WHEEL BALANCER

- For passenger cars, light trucks and motorbikes • TOUCHLESS SYSTEM: High precision laser sensors automatically and quickly measure wheel dimensions
- Automatic wheel positioning Integrated led light illuminates the work area
- Precision counterweight application
- High-precision laser measurement of wheel run-out Touchscreen Interface
- USB ports for peripheral devices and software upgrades MULTI-FUNCTION (ONE-TOUCH) BUTTON: Quick program selection WEIGHT TRAY: Many large trays to house counterweights and tools Spacesaving wheel guard Inclined front side for operator access Rear splash guard

EYELIGHT PLUS DIAGNOSTIC WHEEL BALANCER

- For passenger cars, light trucks and motorbikes • AUTOMATIC, PRECISE WHEEL CLAMPING: Reduces work time
- TOUCHLESS SYSTEM: High precision laser sensors automatically and quickly measure wheel dimensions Automatic wheel positioning Integrated led light illuminates the work area Precision counterweight application High-precision laser measurement of wheel run-out IPOS (Intelligent Positioning) Touchscreen Interface USB ports for peripheral devices and software upgrades MULTI-FUNCTION (ONE-TOUCH) BUTTON: Quick program selection WEIGHT TRAY: Many large trays to house counterweights and tools

ET66 MOTOR DRIVEN BALANCER

• Precise motor-driven balancer designed for heavy duty wheels and can also accommodate passenger wheels • Compact, easy to use and reliable • LED display provides ease of use, manual data entry and comes with dynamic, static, and alum programs • Low balancing speed reduces spin times • User-friendly keyboard



CORGHI TIRE CHANGER SPECIFICATIONS

ASCOT NO.	MFG. NO.	POWER SUPPLY	MAX TIRE OUTSIDE	GROSS SHIPPING WEIGHT
443-09983	EM9980C	10V/220V 60hz	44"	550 lb.
443-01101	Eyelightpls	110V/200V 60hz	44"	605 lb.
443-90201	ET66	110V/1ph/60hz	52"	485 lb.





Wheel Balancer Accessories

HAWEKA QUICK PLATE TUNER TIP

• Replacement Quick Tip for use with Haweka Quick Plate System • Replicates aftermarket wheel vehicle lug mount • Must be used on all aftermarket wheels for proper centering • Aftermarket tuner type Quick Tip • 58mm length, 19.5mm diameter

ASCOT NO. 483-27382

MFG. NO.

DESCRIPTION

HW273E008 023

Haweka Quick Plate Tuner Tip



HAWEKA QUICK PLATE LAND ROVER TIP

• Replacement Quick Tip for use with Haweka Quick Plate System • Specific vehicle lug mount replication for Land Rover applications • Land Rover type Quick Tip, short • 38mm length, 34.5mm diameter



483-27389

ASCOT NO. 483-27389

MFG. NO.

DESCRIPTION

HW273E008 009 Haweka Quick Plate Land Rover Tip

HAWEKA QUICK PLATE STANDARD TIP - 38MM

• Replacement Quick Tip for use with Haweka Quick Plate System • Replicates vehicle lug mount • Standard conical type Quick Tip, short • 38mm length, 24.5mm diameter

ASCOT NO.

MFG NO

DESCRIPTION

HW273E008 003 483-27383

Haweka Quick Plate Standard Tip – 38mm



483-27383

HAWEKA HUB CENTERING SOLUTIONS



ASCOT NO.	MFG. NO.	DESCRIPTION
482-25411	HW150 400 110	9 Piece Pro Collet Kit
482-26460	HW160 400 060	Ford Precision Collet
482-26462	HW160 400 062	Toyota Precision Collet
482-26463	HW160 400 063	Chrysler Precsion Collet 1
482-26464	HW160 400 064	Chrysler Precsion Collet 2
482-25491	HW150 400 091	Cone Kit 40mm: Light Truck
483-40132	HW150 400 132	Haweka Pro Centering Kit VII

Note: All Hub Centering Products also available in 28, 36, 38mm except Duo Expert

HAWEKA QUICK PLATE STANDARD TIP - 58MM

• Replacement Quick Tip for use with Haweka Quick Plate System • Replicates vehicle lug mount • Standard conical Quick Tip, long

• 58mm length, 22.5mm diameter

ASCOT NO. MFG. NO. 483-27385

HW273E008 025

DESCRIPTION Haweka Quick Plate

Standard Tip - 58mm 483-27385

HAWEKA QUICK PLATE BALL SEAT TIP

• Replacement Quick Tip for use with Haweka Quick Plate System • Replicates vehicle lug mount • Ball seat type Quick Tip • 48mm length, 24.5mm diameter



MEG NO HW273E008 007 DESCRIPTION

Haweka Quick Plate Ball Seat Tip



483-27387

HAWEKA PRO CENTERING KIT VII



ASCOT NO.

MFG. NO.

DESCRIPTION

483-40132 HW150 400 132 Haweka Pro Centering Kit VII





Wheel Balancer Accessories (cont.)



ASCOT NO.	MFG. NO.	DESCRIPTION
483-99409	HW200 299 409	U.S. Flange Plate Kit 40mm
482-25649	HW210 400 002	Quick Plate Kit: 40mm

Note: Flange Plates and Quick Plates also available in 28, 36, 38mm

HAWEKA STORAGE SOLUTIONS

ASCOT NO. MFG. NO. 482-29895 HW900 008 205 DESCRIPTION Adapter

Storage Stand

482-29895





ASCOT NO.	MFG. NO.	DESCRIPTION
482-21374	HW700 400 037	Medium Duty Flange Plate
482-27404	HW700 400 037	Medium Duty Five Arm Star
482-26447	HW160 400 047	Hub Pilot Sleeve 1 - 4.88/4.92"
482-26448	HW160 400 048	Hub Pilot Sleeve 2 - 5.59/6.69"
482-26467	HW160 400 067	Hub Pilot Sleeve 7 - 4.88/6.06"
482-29452	HW190 400 052	Hub Pilot Sleeve 3 - 5.46/5.25"
482-29460	HW190 400 060	Hub Pilot Sleeve 4 - 4.56"
482-29462	HW190 400 062	Hub Pilot Sleeve 5 - 4.6"
482-29471	HW190 400 071	Hub Pilot Sleeve 6 - 4.77"
482-28444	HW280 400 044	Universal Adaptor 8x6.5

HAWEKA KITS



482-28147


ASCOT NO.	MFG. NO.	DESCRIPTION
482-28147	HW280 400 147	ProCentering System
482-28415	HW280 400 139	ProMax MD 40mm
482-28414	HW280 400 142	ProMax MD Standard 40mm

HAWEKA NEW PROMAX MD KIT - 40MM

• Professional Centering Solution for 8 and 10-lug medium duty applications • Combination of spring loaded and hub pilot discs provide professional mounting solution • One lug adapter with long plug-in studs for all MD applications • PROBLEM SOLVING SOLUTION FOR: Chevy/GMC 8x180 and 8x210 applications • PROBLEM SOLVING SOLUTION FOR: Ford 8x170, 8x200 and 10x225 applications • Problem solving solution for all 8x6.5 applications • Application chart for plate and collet look up by vehicle included





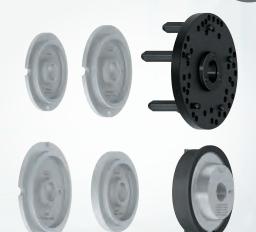

483-40014

ASCOT NO. MFG. NO. DESCRIPTION HW280 400 142 Haweka New ProMax MD Kit - 40mm



HAWEKA

Wheel Balancer Accessories (cont.)



ASCOT NO.	MFG. NO.	DESCRIPTION
483-24486	HW124 408 006	Quick Nut Steel w/ Hood 40-8mm
483-24433	HW140 404 033	Quick Nut HD (metal) 40mm-4mm
483-25433	HW140 403 033	Quick Nut - 40mm - 3mm
483-25403	HW143 283 003	Quick Nut - 28mm - 3mm
483-25406	HW143 283 006	Quick Nut w/ Handles - 28mm - 3mm
483-21982	HW190 008 002	Pressure Cup - 5"
483-29821	HW190 008 021	Pressure Cup - 8"
483-29827	HW190 008 027	Quick Nut Pressure Ring

Note: Quick Nuts are also availble for 28, 36, 38m

HAWEKA SOFT GRIP QUICK NUT - 40 X 8

- Improved design, essential wheel balancer tooling
- New ergonomic design with soft-touch handle
- New metal alloy threaded jaws last longer Larger bearing surface allows for higher torque • Pressure ring is always attached to the quick nut (a must for quick plate/flange plate use) • Optimized glide prevents fast wear of the thread shaft • Redesigned, heavy duty pressure cup • Improved quick action mechanism prevents opening under load • Lower housing height for shorter shafts and larger profile wheels...always grabs the thread • Lighter weight, easier to handle due to lower housing height







ASCOT NO. 483-40800 MFG. NO.

DESCRIPTION

HW125 408 000

Haweka Soft Grip Quick Nut - 40 x 8

STEEL PROGRIP QUICKNUT WITH HANDLES AND PRESSURE CUP

• Essential wheel balancer tooling • Clamping device speeds wheel mounting process on balancers • Heavy duty steel design solution for Road Force balancers



ASCOT NO. 483-40806

MFG. NO. HW124 408 006 DESCRIPTION

Steel ProGrip QuickNut 40 x 8 with Handles and Pressure Cup

SOFTGRIP QUICKNUTS WITH HANDLES

- Essential wheel balancer tooling Upgraded threaded jaws with bigger bearing surface allows higher torque pressure
- Softgrip clamping device will not open under load New alloy metal jaws provides longer life for threaded jaws • Torque ring is ever present – removal not required for use with pressure cup • Heavier duty pressure cup • Lower overall housing height enables use with quick or flange plates on shorter shafts



ASCOT NO.	MFG. NO.	DESCRIPTION
483-40301	HW125 403 001	SoftGrip Quick Nut 40 x 3 with Handles
483-40401	HW125 404 001	SoftGrip Quick Nut 40 x 4 with Handles
483-40801	HW125 408 001	SoftGrip Quick Nut 40 x 8 with Handles





PRESSURE CUP FOR HAWEKA SOFT GRIP QUICK NUTS

· Must be used with rubber ring (HW190 008 005) • Works with all Soft Grip Quick Nuts (Not standard quick nuts) • Rigid, heavy duty design prevents flex during balancer spin Long lasting, hard plastic composition • Snap Connects easily to Soft Grip Quick Nuts



483-08065

ASCOT NO.

MFG NO

DESCRIPTION

HW190 008 065 483-08065

Pressure Cup for Haweka Soft Grip Quick Nuts

PRESSURE RING FOR ALL PROGRIP QUICKNUTS

• Pressure Ring must be present on ProGrip QuickNuts when using Quick or Flange Plates • Without the pressure ring, the clamping device does not provide enough torque pressure to press rim on cones/collets evenly and consistently eliciting inaccurate balancing results



483-40015

483-08027

· Must be present on all balancers with open mid centering devices/hubs (Coats) • Without backing spring, wheels can

only be front coned - not acceptable for proper balancing

ASCOT NO. MFG. NO. 483-08027

BACKING SPRING

MFG NO

HW190 400 015

ASCOT NO

483-40015

DESCRIPTION

DESCRIPTION

Backing Spring

HW190 008 027 | Pressure Ring for all ProGrip QuickNuts

PROGRIP PRESSURE CUP

• Pressure Cup for all ProGrip Quicknuts 40mm, 38mm, 36mm, 28mm

• HW143 403 003, HW143 403 006, HW143 383 003, HW143 383 006, HW143 363 003, HW143 363 006, HW143 283 003, HW143 283

006, HW143 404 003, HW143 404 006, HW143 285 006, HW143 405 006, HW140 403 033, HW140 404 033



ASCOT NO. 483-08002

MFG. NO. HW190 008 002

DESCRIPTION ProGrip Pressure Cup

UNIVERSAL SPACER & UNIVERSAL DONUT

• Spacer provides necessary distance between mid centering device and cone/collet to prevent bottoming out and/or mid centering cup interference • Must use spacer with ProCollets 7-9 • Donut required for use with backing spring on open mid centering device balancers (Coats)



483-40045

ASCOT NO.	MFG. NO.	DESCRIPTION
483-08047	HW190E008 047	Universal Spacer
483-40045	HW190E008 045	Universal Donut
483-40047	HW190E400 045	Universal Donut - 40mm
	483-08047 483-40045	483-08047 HW190E008 047 483-40045 HW190E008 045

RUBBER COVER FOR 5" PRESSURE CUP

 Provides rubberized protection between wheel rim and pressure cup



ASCOT NO.

MFG. NO.

483-08005 HW190 008 005 DESCRIPTION

Rubber Cover for 5" Pressure Cup





Wheel Balancer Accessories (cont.)



NORTH AMERICAN FLANGE PLATE KIT 40MM

- · Replicates vehicle wheel lug mount on the balancer
- Provides consistent, even pressure when mounting wheel on cones/collets for precision balancing results



ASCOT NO

MFG NO

DESCRIPTION

483-99409 HW200 299 409

North American Flange Plate Kit 40mm

LIGHT TRUCK CONE KIT 40MM

· Covers hub ranges 120mm-174mm • Kit includes a cone and distance spacer • Works on all balancer makes and models with 40mm shaft



483-40091

ASCOT NO.

MFG. NO.

DESCRIPTION

HW150 400 091 Light Truck Cone Kit 40mm 483-40091

HAWEKA DUO COLLET SPACER - 40MM

· Provides spacer and additional strength between Duo Collets and MCD Spring • Recommended for use on Coats balancers



483-40001

▲WARNING: For more information go to www.P65Warnings.ca.gov.

ASCOT NO.

MFG. NO.

DESCRIPTION

483-40001

HW190 400 010 Haweka Duo Collet Spacer – 40mm

TOYOTA PRECISION COLLET

· Precision-designed, application-specific solution for balancing Toyota Truck wheels • Problem-solving precision collet for Toyota Tundra, Sequoia, Tacoma, 4Runner, FJ as well as Lexus SUV applications and more



ASCOT NO. MFG. NO. 483-40060

DESCRIPTION

HW160 400 062 Toyota Precision Collet

FORD PRECISION COLLET

• Precision-designed, application-specific solution for balancing Ford light truck and SUV applications • Problem-solving precision collet for Ford F150, Expedition and Lincoln Navigator applications







483-40062

ASCOT NO MFG NO 483-40062 HW160 400 060

DESCRIPTION Ford Precision Collet



Challenger Lifts

CL10 SERIES

10,000 LB. CAPACITY TWO-POST LIFT


COMPLETE PRODUCTIVITY: Conventional Power Controls, Versymmetric* offset 3-stage front and rear arms

- Versymmetric® offset front arms provide directSPOT™
 to vehicle lift points and safely lifts both symmetrically
 and asymmetrically within the same service bay
 maximizing service capabilities and revenue potential
- Padded overhead shut off system prevents vehicle damage from being raised too high.
- Oversized 5" diameter pulley and heavy duty 5/16" cable reduces stress on equalization system and increases cable life
- Fully gusseted base plate design reduces column deflection. 48" elongated carriage design decreases load on bearing
- Single point mechanical lock release system with jacket coated protection and no lock cable pulleys, and double clutch release bar protects cable from stretching while disengaging both column locks simultaneously

DESCRIPTION

CHALLENGER 2-POST LIFT SPECIFICATIONS

- 11' 8" standard height with 2' and 3' extensions available allows lift to be placed in standard service bay with 12' ceiling
- Rubber door guards provide added security against vehicle door damage

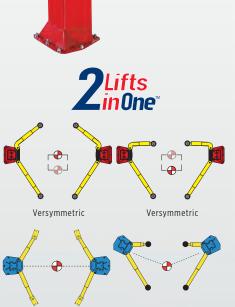

304-00010



- Asymmetric Lifts accommodate 70% of top 20 selling vehicles, Symmetric Lifts accommodate 30% of the top 20 selling vehicles
- Versymmetric* Lifts accommodate 100% of the top 20 selling vehicles, properly lifts cars, trucks, vans and SUVs with one lift

304-00010 CL10 CL10 Series: 10,000 lb. Capacity Two-Post Lift

MFG. NO.

ASCOT NO.

ASCOT NO.	MFG. NO.	MAX. CAP. (LB.)	OVERALL WIDTH	BETWEEN COLUMNS	DRIVE-THRU WIDTH	OVERALL HEIGHT	UNDER BAR CLEARANCE	FRONT ARM LENGTH	REAR ARM LENGTH	MAX. LIFT HEIGHT	POWER REG.
304-00010	CL10	10,000	11' 6-1/2" to 11' 11"	110" to 114-1/2"	100-1/2" to 105"	11′ 11″	11' 2-1/2"	27" to 41"	42" to 59"	74-5/8"	2HP, Single Phase, 208V-230V

Challenger Lifts (cont.)

MAXIMUM PRODUCTIVITY (CL10V3)

- Conventional Power Controls
- Versymmetric® Plus offset 3-stage front + 3-stage rear arms
- Adjustable overhead height can now be set at 11'2" (Standard height: 11'8")

ASCOT NO. 304-01102

MFG. NO. CL10V3

DESCRIPTION

Maximum Productivity



SA10: 10,000 LB. CAPACITY TWO-POST LIFT

• Challenger's SA10 2-post lift offers 10,000 lb. capacity • You can install the SA10 in either symmetric or asymmetric position, depending on your service needs • The SA10 also features adjustable height and width options to further customize it to meet your needs. Innovative 3-stage front and 2-stage rear arms provide greater overall sweep

ASCOT NO. MFG. NO. 304-00210 SA10

DESCRIPTION

SA10: 10,000 lb. Capacity Two-Post Lift





CHALLENGER 2-POST LIFT SPECIFICATIONS

ASCOT NO.	MFG. NO.	MAX. CAP. (LB.)	OVERALL WIDTH	BETWEEN COLUMNS	DRIVE-THRU WIDTH	OVERALL HEIGHT	UNDER BAR CLEARANCE	FRONT ARM LENGTH	REAR ARM LENGTH	MAX. LIFT HEIGHT	POWER REG.
304-01102	CL10V3	10,000	11' 6-1/2" to 11' 11"	10" to 114-1/2"	100-1/2" to 105"	11′ 11″	14' 2-1/2"	19-13/16" to 42"	37-5/8" to 60"	74-5/8"	2HP, Single Phase, 208V-230V
304-00210	SA10	10,000	129" to 137-1/2"	106-3/4" to 137-1/2"	92-3/4" to 94-1/2"	136-1/2" to 142-1/2"	131-1/8" to 137-1/8"	22-3/8" to 41-1/2"	38-1/4" to 59"	74-1/2"	2HP, Single Phase, 60Hz





VLE10: 10,000 LB. CAPACITY TWO-POST LIFT WITH VERSYMMETRIC® TECHNOLOGY

• 3-Stage Versymmetric® front arms and 2-Stage rear arms provide a wide arm sweep for asymmetric and symmetric lifting in the same service bay • 11.875" standard height fits in service bays with 12' ceiling height • Double telescoping screw pads with rubber foot pad • Padded overhead shut-off system prevents vehicle damage • Jacketed pulley-less single-point mechanical lock release system that was once exclusive to our CL series lifts are now standard on the VLE10 • Rubber door guards protect vehicle from door damage • Premium powder coat finish provides long-lasting durability • Plated arm restraints and arm pins inhibit rust and provide long-lasting durability

LE12:12,000 LB. CAPACITY TWO-POST LIFT

• Heavy-Duty 2-stage telescoping arms provide excellent reach and retraction to accommodate vehicle lifting points • 13′-10″ or 14′-7″ adjustable column height accommodates higher profile vehicles and provides maximum headroom to work underneath vehicles • Heavy-Duty telescoping Screw Pads • Padded overhead shut off system • Single-point mechanical lock release system allows technician to disengage both column locks simultaneously • ALI/ETL certified





VLE10 Series: 10,000 lb. Capacity Two-Post Lift with Versymmetric® Technology ASCOT NO. MFG. NO. DESCRIPTION

304-00120 LE12 LE12 Series: 12,000 lb. Capacity Two-Post Lift

CHALLENGER 2-POST LIFT SPECIFICATIONS

ASCOT NO.	MFG. NO.	MAX. CAP. (LB.)	OVERALL WIDTH	BETWEEN COLUMNS	DRIVE-THRU WIDTH	OVERALL HEIGHT	UNDER BAR CLEARANCE	FRONT ARM LENGTH	REAR ARM LENGTH	MAX. LIFT HEIGHT	POWER REG.
304-00111	VLE10	10,000	131.625"	110.25"	98.375"	143.875" to 167.875"	137"	22.3125" to 39.375"	38.375" to 55.375"	74.75"	208-230v Single Phase, 30-amp breaker
304-00210	LE12	10,000	139.75"	115"	103"	166" to 175"	159.5" to 168.5"	35.75"	54.5"	77.75"	208-230v Single Phase, 30-amp breaker

CL Challenger Lifts

Challenger Lifts (cont.)

CL12-LC: 12,000 LB. CAPACITY LOW CEILING TWO-POST LIFT W/ THREE STAGE ARMS

• Service more vehicles and make more money with Challenger Lifts' new CL12-LC, 12,000 lb. capacity two post low ceiling lift • The new CL12-LC comes standard with 3-stage front and 3-stage rear arms providing the advantage of lifting many common cars, trucks, vans and SUVs within rated capacity

CLFP9:9,000 LB. CAPACITY FLOOR PLATE LIFT

- 10'-7/8" overall column height is ideal for servicing vehicles in a low ceiling height • Low profile drive-over floor plate for easy vehicle positioning • 3-stage front + 3-stage rear arms provide excellent reach and retraction to lift a variety of vehicles • Electric/ hydraulic heavy-duty chain lifting operation with cable equalization
- Dual point mechanical pull-lock cable release system









ASCOT NO.

304-00009

MFG. NO. CLFP9

DESCRIPTION

9,000 lb. Capacity Floor Plate Lift

ASCOT NO. MFG. NO.

304-00121

DESCRIPTION

CL12-LC: 12,000 lb. Capacity Low Ceiling Two-Post Lift w/ Three Stage Arms



LIFTING TRUCKS OR OTHER FRAME VEHICLES.

CHALLENGER 2-POST LIFT SPECIFICATIONS

ASCOT NO.	MFG. NO.	MAX. CAP. (LB.)	OVERALL WIDTH	BETWEEN COLUMNS	DRIVE-THRU WIDTH	OVERALL HEIGHT	UNDER BAR CLEARANCE	FRONT ARM LENGTH	REAR ARM LENGTH	MAX. LIFT HEIGHT	POWER REG.
304-00009	CLFP9	9,000	11' 5-1/2"	109"	98-3/16"	N/A	N/A	24 1/2" to 44-1/2"	24-1/2" to 44-1/2"	79-1/8"	2HP, Single Phase, 60Hz
304-00121	CL12-LC	12,000	142"	114-1/2"	103-1/2"	143"	136"	27-1/2"	59"	80-1/4"	2HP, Single Phase, 60HZ

▲WARNING: For more information go to www.P65Warnings.ca.gov.





4115 SERIES: 15,000 LB. CAPACITY FOUR POST LIFTS

•All-new and wider 22" runways • Open and closed front design for better ergonomics, allowing easy access to adjustment points on both standard or long length runway racks • Improved 4-wheel alignment wheelbase for extended alignment capabilities allowing you to service both long and short wheelbase vehicles • Louvered approach ramps prevent wheel-spin and are more effective than diamond tread or abrasive strips • Keep your shop looking stylish & clean with our new and improved all enclosed front column and crossbeam design • Expect a longer and smoother operational life with our UHMW internally encapsulated slide block • Compatible with the industry's latest imaging alignment systems • 17 locking positions with improved lock design

4P14FEX & 4P14XFX: 14,000 LB. CAPACITY FOUR POST LIFT

• The highest rise in the industry provides more working room underneath vehicles • Louvered approach ramps for positive vehicle traction • Solid piece column construction provides rigidity and stability • Oversized solid machined steel pulleys for prolonged pulley and cable life • Adjustable runways to accommodate a variety of tread widths • 14 level locking positions for a variety of general service tasks • ALI/ETL certified • OPTIONAL ACCESSORIES: 7,000 lb. rolling jacks for brake and tire work; Optional bolt on alignment kit converts general service application into alignment rack



CHALLENGER 4-POST LIFT SPECIFICATIONS

ASCOT NO.	MFG. NO.	MAX. CAP. (LB.)	OVERALL WIDTH	LENGTH OVERALL	INSIDE COLUMNS	HEIGHT OF COLUMNS	HEIGHT OF RUNWAYS	WIDTH OF RUNWAYS	WIDTH BETWEEN RUNWAYS	MAX. LIFT HEIGHT	POWER REG.
305-41150	4115EFO (Std, Open Front, Flat)	15,000	Front: 142", Rear: 141.75	250.75"	Front: 120.75", Rear: 125.5"	Front: 99.25", Rear: 98"	7"	22.375"	40.625"	78"	208-230v
305-41151	4115XFO (Ext., Open Front, Flat)	15,000	Front: 142", Rear: 141.75	277"	Front: 120.75", Rear: 125.5"	Front: 99.25", Rear: 98"	7"	22.375"	40.625"	78"	208-230v
305-41152	4115EFX (Std, Closed Front, Flat)	15,000	141.75"	247.625"	125.5"	98"	7"	22.375"	40.625"	78"	208-230v
305-41153	4115XFX (Ext., Closed Front, Flat)	15,000	141.75"	275.5"	125.5"	98"	7"	22.375"	40.625"	78"	208-230v
305-41400	4P14EFX	14,000	10" 10' 3/4"	20" 4-1/2"	116"	90-1/2"	7"	20"	40" - 43"	78"	208-230v
305-41401	4P14FEX	14,000	10" 10' 3/4"	20" 4-1/2"	116"	90-1/2"	7"	20"	40" - 43"	78"	208-230v



Challenger Lifts (cont.)

EV1020: 10,000 LB. CAPACITY IN GROUND LIFT

• Offset 3-stage front and rear safety arms • 87" drive through capacity • 50% more bearing contact than competitors increases stability • Stainless steel airlock release cylinder prevents rust

NEW ADDITIONS: Larger 8-1/2" diameter chrome piston • Enhanced raised wiper at top and bottom of bearing provides better grease retention • Minimizes contamination from entering into bearings

CLHM-140 AND CLHM-190: HEAVY DUTY MOBILE COLUMN LIFTS

- Challenger's heavy-duty mobile lifting system are robust, yet easily maneuverable and can be operated on almost any solid surface, indoors or out
- · Our heavy-duty mobile lifts are also capable of lifting vehicles of any axle length or wheelbase
- · Mobile lifts provide the flexibility and convenience to lift any rubber-tired vehicle, from small passenger cars to large 2-, 3- or 4-axle vehicles up to 152,000 pounds
- Models are available in 14,000 lb. or 19,000 lb. capacity columns









307-01021 (Raised)



The CHLM locks.



The CHLM lifting system is conveniently wireless for a clutter-free work area.

ASCOT NO. 307-01021

MFG. NO. EV1020

DESCRIPTION

10,000 lb. Capacity In Ground Lift

ASCOT NO.	MFG. NO.	DESCRIPTION
308-00140	CHLM 140-4	14,000 lb. Capacity Mobile Column Lift
308-00190	CHLM 190-4	19,000 lb. Capacity Mobile Column Lift





MR6: 6,000 LB. CAPACITY MID-RISE LIFT

- Portable mid-rise lift with Heavy-Duty tow dolly provides flexibility to service vehicles anywhere, inside or out 7 locking positions allow technician to work at an ergonomic height to increase productivity and minimize fatigue Electric motor mounted on tow dolly provides convenience and ease of maneuverability
- Single push button power unit with release valve provides convenience when lifting and lowering vehicles Slip-on rubber pad adapter kit with height extension accommodates high profile vehicles Sliding/rotating arm design accommodates meeting pick-up points on a wider range of vehicles

SRM10: 10,000 LB. CAPACITY SHORT-RISE LIFT

• Standard with 4 two-position adapter blocks for increased vehicle spotting versatility • Standard storage trays are conveniently placed on each side of the lift to prevent lug nuts and other small parts from being misplaced • Dual cylinders provide stable 10,000 lb. lifting capabilities to accommodate a wide range of vehicles • Floor mounted diamond plated approach ramps help to prevent slipping • 3 locking positions • ALI/ETL certified



309-00404

Rubber Blocks & Lift Pads

RUBBER LIFT PAD (5" ROUND)

- RUBBER PAD DIMENSIONS: 5" round • Kit of four rubber pads
- Replacement pads for Nussbaum lifts

ASCOT NO.	
309-00003	

MFG. NO. JOK03M

DESCRIPTION Rubber Lift Pad - 5" Round



RUBBER LIFT PAD (4" X 5")

- RUBBER PAD DIMENSIONS: 4" x 5"
- Kit of four rubber pads Replacement pads for Ammco, Ben Pearson lifts

ASCOT	NO.
700.00	NOCE

MFG. NO. JOK05M

DESCRIPTION Rubber Lift Pad - 4" x 5"



RUBBER LIFT PAD (5" X 5")

• RUBBER PAD DIMENSIONS: 5" x 5" • Kit of four rubber pads • Replacement pads for Forward, Worth, American, Gemini, Grand, Tuxedo, Eagle, Whip lifts

ASCOT NO.	
309-00007	

MFG. NO.

DESCRIPTION JOK07M Rubber Lift Pad - 5" x 5'



RUBBER LIFT PAD (4" X 4")

- RUBBER PAD DIMENSIONS: 4" x 4"
- · Kit of four rubber pads · Replacement pads for Challenger CL9 and CL10 lifts

ASCOT NO. 309-00009

MFG. NO. J0K090

DESCRIPTION Rubber Lift

309-00009



RUBBER LIFT PAD (3.25" X 4")

- RUBBER PAD DIMENSIONS: 3.25" x 4"
- Kit of four rubber pads Replacement pads for Rotary SPO10, SPO12 lifts

ASCOT NO. 309-00022

MFG. NO. JOK22D

DESCRIPTION Rubber Lift Pad - 3.25" x 4"



RUBBER JACK PADS FOR TESLA VEHICLES

• Lifting jack pads for tesla models

• Set of four in convenient carrying case

 Protect the vehicle, battery and paint from damage

· Can be used with floor jack or 2-post lifts

· Top piece fits into designated factory lifting points

ASCOT NO. MFG. NO. TJP4 309-00404

DESCRIPTION Rubber Jack Pads for Tesla Vehicles - Set of 4

RUBBER LIFT PAD (5.25" ROUND)

• RUBBER PAD DIMENSIONS: 5.25" round • Kit of four rubber pads • Replacement pads for Challenger CL10, Quality lifts

ASCOT NO. MFG. NO. 309-00014 J0K140

DESCRIPTION

Rubber Lift Pad - 5.25" Round



RUBBER BLOCK 1.5"

• RUBBER BLOCK DIMENSIONS: 6" x 4" • Kit of four 1.5" rubber blocks • Spacer blocks for Rotary Airjacks and all Mid-Rise pad lifts

309-00011

ASCOT NO. MFG. NO. 309-00011 JORB-1

DESCRIPTION Rubber Block 1.5"

RUBBER BLOCK 3"

• RUBBER BLOCK DIMENSIONS: 6" x 4" • Kit of four 3" rubber blocks • Spacer blocks for Rotary Airjacks and all Mid-Rise pad lifts



ASCOT NO. MFG. NO. 309-00013 JORB-3

Rubber Lift Pad - 4" x 4"





Rolling Jacks & Work Stations



ROLLING JACKS

• Optional 6,000 lb. and 7,500 lb. capacity rolling jacks allow easy access to brakes and wheels • Available for the 4P14 Series lifts • Air/hydraulic operation • Adjustable width • Low vehicle drive-over clearance • Stackable height extensions with built-in storage rack • Factory installed and protected filter lubricator and regular

ASCOT NO.	MFG. NO.	DESCRIPTION
218-00060	RJ6	Air/Hydraulic Operation, 40 Series and AR40 Series
309-61275	RJ7.5	Air/Hydraulic Operation, For 4P14 and 4015 series lifts

3-TON CAPACITY AIR / HYDRAULIC PUMP OPERATED ROLLING LIFT BRIDGE

Used in quick lube pit applications or in conjunction with above ground lifts. The bridge straddles the lift rails and raises the vehicle's tires off the rails for wheel alignment, brake, tire and suspension work. Push button air/hydraulic pump provides safe, quick lifting up to a height of 20-3/4".

ASCOT NO.	MFG. NO.	DESCRIPTION
218-79324	79324G	3-Ton Capacity Air / Hydraulic Pump Operated Rolling Lift Bridge

AIR ELECTRIC WORK STATIONS

• Air and Electric workstation with filter, lubricator and regulator for four post car and truck lifts • Increase productivity with air supply and electric outlets on the four post automotive lift column • Convenient power source for extension lights and other tools needed when servicing cars and trucks

ASCOT NO.	MFG. NO.	DESCRIPTION
309-10264	B10264	Air/Electric with Filter/Lubricator/Regulator for Two Post Lifts
309-99700	B99700	Tire Tool Manager Work Station with Filter Lubricator/Regulator





Passenger Wheel Weights

Truck Wheel Weights

Adhesive Wheel Weights & Rolls

Wheel Weight Displays & Kits

Wheel Weight Tools

Balancing Beads



Lead Passenger Wheel Weights

- AW: Buick, Cadillac, Chevrolet, Chrysler, Dodge, Eagle, Geo, Isuzu, Oldsmobile, Plymouth & Pontiac
- EN: Acura, Audi, Ford Trucks, Honda, Mercedes & Volkswagen
- FN: Acura, Geo, Honda, Infiniti, Lexus, Nissan & Toyota
- IAW: AMC, Audi, BMW, Chrysler, Dodge, Eagle, Geo, Hyundai, Merkur, Mitsubishi, Nissan, Plymouth, Pontiac, Saab, Sterling, Subaru, Suzuki, Toyota, Volkswagen & Volvo
- LH: Chrysler, Dodge & Plymouth
- MC: Buick, Cadillac, Chevrolet, Chrysler, Dodge, Eagle, Ford, Lincoln, Mazda, Mercury, Mitsubishi, Oldsmobile, Plymouth, Pontiac & Satum





APPLICATIONS:

FORD: All up to 1984; CHRYSLER: All up to 1989; GM: All up to 1987; decreasingly used from 1988-2000

NOTE: AWS = AWN = ALC

Available sizes: .025 oz - 3.00 oz (Coated or Uncoated) **Quantity:** 25/box (Coated), 50/box (Uncoated)





APPLICATIONS:

AUDI: All from 1997; VW: All from 1997; used on many aftermarket alloy wheels with thin rim flanges

NOTE: ENS = EN = ALCEN

Available sizes: 10 g - 60 g (Coated)

Quantity: 25/box

FN



APPLICATIONS:

TOYOTA: All since 1990; LEXUS: All since 1990; HONDA: All since 1989; ACURA: All since 1990; NISSAN: All since 1990; INFINITI: All since 1990; ISUZU: All since 1997; MAZDA: All since 1990; DAEWOO: All since 1999

NOTE: FNS = FN = ALCFN

Available sizes: 5 g - 80 g (Coated)

Quantity: 25/box

IAW



APPLICATIONS:

AUDI: Up To 1996; VW: Up To 1996; BMW, CATERA, GEO HYUNDAI, JAGUAR, KIA, MITSUBISHI, SUBARU, SUZUKI, VOLVO

NOTE: IAWS = IAW = ALCIW

Available sizes: 5 g - 60 g (Coated or Uncoated)

Quantity: 25/box

LH



APPLICATIONS:

AUDI: All from 1997; VW: All from 1997; used on many aftermarket alloy wheels with thin rim flanges

NOTE: LHS = LH = ALCLH

Available sizes: .25 oz - 3.00 oz (Coated)

Quantity: 25/box

MCN



APPLICATIONS:

FORD: All from 1985; CHRYSLER: All from 1990 to 1997; some models changed to LHS in 1998; GM: Increasingly used starting in 1988; as of 2000 only C5 Corvette remains AWS

NOTE: MCS = MCN = ALCMC

Available sizes: .25 oz - 4 oz (Coated), .25 oz - 3 oz (Uncoated)

Quantity: 25/box (Coated), 50/box (Uncoated)



Zinc Passenger Wheel Weights

- AW: Buick, Cadillac, Chevrolet, Chrysler, Dodge, Eagle, Geo, Isuzu, Oldsmobile, Plymouth & Pontiac
- EN: Acura, Audi, Ford Trucks, Honda, Mercedes & Volkswagen
- FN: Acura, Geo, Honda, Infiniti, Lexus, Nissan & Toyota
- IAW: AMC, Audi, BMW, Chrysler, Dodge, Eagle, Geo, Hyundai, Merkur, Mitsubishi, Nissan, Plymouth, Pontiac, Saab, Sterling, Subaru, Suzuki, Toyota, Volkswagen & Volvo
- LH: Chrysler, Dodge & Plymouth
- MC: Buick, Cadillac, Chevrolet, Chrysler, Dodge, Eagle, Ford, Lincoln, Mazda, Mercury, Mitsubishi, Oldsmobile, Plymouth, Pontiac & Satum
- P: Most common for steel wheels
- T: Chevrolet, Ford, GMC & Lincoln

AWZ

ENZ

FNZ

IAWZ











APPLICATIONS:

Quantity: 25/box

FORD: All up to 1984; CHRYSLER: All up to 1989; GM: All up to 1987; decreasingly used from 1988-2000

Available sizes: .025 oz - 3.00 oz

APPLICATIONS:

AUDI: All from 1997; VW: All from 1997; Used on many aftermarket alloy wheels with thin rim flanges

Available sizes: 5 g - 60 g

Quantity: 25/box

APPLICATIONS:

TOYOTA: All since 1990; LEXUS: All since 1990; HONDA: All since 1989; ACURA: All since 1990; NISSAN: All since 1990; INFINITI: All since 1990; ISUZU: All since 1997; MAZDA: All since 1990; DAEWOO: All since 1999

Available sizes: 5 g - 60 g

Quantity: 25/box

APPLICATIONS:

AUDI: Up to 1996; VW: Up to 1996; BMW, CATERA GEO, HYUNDAI, JAGUAR, KIA, MITSUBISHI, SUBARU, SUZUKI, VOLVO

Available sizes: 5 g - 60 g Quantity: 25/box

LHZ

MCZ

PZ

TZ

125 120 35



APPLICATIONS:

CHRYSLER: Used on LH platform (Intrepid, Concorde, LHS, 300M) and all Mini Van models since 1998. Also used on 2000 Neon, 2001 PT Cruiser and 2001 Sebring & Stratus sedans and convertibles

Available sizes: .025 oz - 3.00 oz Quantity: 25/box

1,002 -> ZN MC 280

APPLICATIONS:

FORD: All from 1985; CHRYSLER: All from 1990 to 1997; some models changed to LHS in 1998; GM: Increasingly used starting in 1988; as of 2000 only C5 Corvette remains AWS

Available sizes: .025 oz - 3.00 oz

Quantity: 25/box



APPLICATIONS:

STANDARD PASSENGER CAR with 13" to 15" steel wheels

Available sizes: .025 oz - 3.00 oz

APPLICATIONS: CHEVROLET: Full Size Pick Up,

Suburban, Yukon, Tahoe from 2000; FORD: Expedition from 1997. F-100. F-150 from 1997: LINCOLN: Lincoln Navigator with alloy & steel wheels from 1998

Available sizes: .025 oz - 3.00 oz Quantity: 25/box

Quantity: 25/box

⚠WARNING: For more information go to www.P65Warnings.ca.gov.



Steel Passenger Wheel Weights

- AW: Buick, Cadillac, Chevrolet, Chrysler, Dodge, Eagle, Geo, Isuzu, Oldsmobile, Plymouth & Pontiac
- EN: Acura, Audi, Ford Trucks, Honda, Mercedes & Volkswagen
- FN: Acura, Geo, Honda, Infiniti, Lexus, Nissan & Toyota
- IAW: AMC, Audi, BMW, Chrysler, Dodge, Eagle, Geo, Hyundai, Merkur, Mitsubishi, Nissan, Plymouth, Pontiac, Saab, Sterling, Subaru, Suzuki, Toyota, Volkswagen & Volvo
- LH: Chrysler, Dodge & Plymouth
- MC: Buick, Cadillac, Chevrolet, Chrysler, Dodge, Eagle, Ford, Lincoln, Mazda, Mercury, Mitsubishi, Oldsmobile, Plymouth, Pontiac & Satum
- P: Most common for steel wheels
- T: Chevrolet, Ford, GMC & Lincoln

AWFE

ENFE

FNFE

IAWFE



APPLICATIONS:

FORD: All up to 1984; CHRYSLER: All up to 1989; GM: All up to 1987; decreasingly used from 1988-2000

Available sizes: .025 oz - 3.00 oz

Quantity: 25/box



APPLICATIONS:

AUDI: All from 1997; VW: All from 1997; Used on many aftermarket alloy wheels with thin rim flanges

Available sizes: 5 g - 60 g

Quantity: 25/box



APPLICATIONS:

TOYOTA: All since 1990; LEXUS: All since 1990; HONDA: All since 1989; ACURA: All since 1990; NISSAN: All since 1990; INFINITI: All since 1990; ISUZU: All since 1997; MAZDA: All since 1990; DAEWOO: All since 1999

Available sizes: 5 g - 60 g

Quantity: 25/box



APPLICATIONS:

AUDI: Up to 1996; VW: Up to 1996; BMW, CATERA GEO, HYUNDAI, JAGUAR, KIA, MITSUBISHI, SUBARU, SUZUKI, VOLVO

Available sizes: $5\,g$ - $60\,g$

Quantity: 25/box



MCFE



TFE



APPLICATIONS:

CHRYSLER: Used on LH platform (Intrepid, Concorde, LHS, 300M) and all Mini Van models since 1998. Also used on 2000 Neon, 2001 PT Cruiser and 2001 Sebring & Stratus sedans and convertibles

Available sizes: .025 oz - 3.00 oz

Quantity: 25/box



APPLICATIONS:

FORD: All from 1985; CHRYSLER: All from 1990 to 1997; some models changed to LHS in 1998; GM: Increasingly used starting in 1988; as of 2000 only C5 Corvette remains AWS

Available sizes: .025 oz - 3.00 oz

Quantity: 25/box



APPLICATIONS:

STANDARD PASSENGER CAR with 13" to 15" steel wheels

Available sizes: 5 g - 60 g **Quantity:** 25/box



APPLICATIONS:

CHEVROLET: Full Size Pick Up, Suburban, Yukon, Tahoe from 2000; FORD: Expedition from 1997, F-100, F-150 from 1997; LINCOLN: Lincoln Navigator with alloy & steel wheels from 1998

Available sizes: .025 oz - 3.00 oz

Quantity: 25/box





Plasteel® Passenger Wheel Weights

AWPS: Used on most domestic vehicles prior to 1995 with alloy wheels

ENPS: Used on Mercedes, Audi & Volkswagen & many aftermarket alloy wheels with thin flanges

FNPS: Used on most Japanese vehicles with alloy wheels

IAWPS: Used on some European & Asian vehicles with alloy wheels

MCPS: Used on most North American vehicles with alloy wheels

PPS: Made to fit under hub caps on alloy wheels

TPS: Used on some light trucks & SUVs with alloy wheels

AWPS

ENPS

FNPS

IAWPS









Available sizes: .025 oz - 3.00 oz

Quantity: 25/box

Available sizes: 5 g - 60 g

Quantity: 25/box

Available sizes: 5 g - 60 g

Quantity: 25/box

Available sizes: 5 g - 60 g

Quantity: 25/box

MCPS

PPS

TPS







Available sizes: .025 oz - 3.00 oz

Quantity: 25/box

Available sizes: .025 oz - 3.00 oz

Quantity: 25/box

Available sizes: .025 oz - 3.00 oz

Quantity: 25/box



Heavy Duty Lead Truck Wheel Weights

LT1



APPLICATIONS:

• For light trucks, 3/4 & 1 ton vehicles with either tube or tubeless rims where such rims are too thick for "P" series weights • For use on heavier trucks with thin rim flanges • Use "P" series weights on 1/2 ton vehicles • Use rim gauge RG2 to verify correct application

NOTE: LT1 = BTS



Available sizes: .5 oz - 6.00 oz Quantity: 25/box 17



APPLICATIONS:

• Most popular weight for the medium duty truck • Used on most trucks with tube type tires

NOTE: 17 = BTLM + E

14 & 16 oz: 10/box)



Available sizes: 1 oz - 16 oz

Quantity: 25/box (10 & 12 oz: 20/box,

APPLICATIONS:



TAL

Available sizes: 2 oz - 8 oz Quantity: 25/box



APPLICATIONS:

• Used on heavy duty trucks with Firestone or Accuride, Budd or Goodyear tubeless rims (except steel rims with curved edges) • Primarily used on rim widths of 6.75", 7.50" and 8.25"

NOTE: CT = BTLT



Available sizes: 2 oz - 16 oz Quantity: 25/box RC



APPLICATIONS:

- Used on heavy duty trucks with Firestone or Accuride, Radial Commander rims
- Can be used with new strip steel rims with curved edges • Use rim gauge RG2 to verify correct application

NOTE: RC = BTRC



Available sizes: 2 - 12 oz

Quantity: 25/box (10 & 12 oz: 20/box)

TS



APPLICATIONS:

• All 1997 and newer Ford trucks with alloy and steel wheels use the "TS" series wheel weight • Many domestic trucks with decorative steel wheels, Ford truck new alloy wheels • New domestic full size trucks equipped with wheels using thicker flanges and chrome or powder coatings

NOTE: TS = TN = TTC

Available sizes: .025 oz - 5 oz

Quantity: 25/box



Zinc Truck Wheel Weights

LT1Z



TALZ







APPLICATIONS:

• For light trucks, 3/4 & 1 ton vehicles with either tube or tubeless rims where such rims are too thick for "P" series weights • For use on heavier trucks with thin rim flanges • Use "P" series weights on 1/2 ton vehicles • Use rim gauge RG2 to verify correct application NOTE: LT1 = BTS

Available sizes: .5 oz - 5.00 oz Quantity: 25/box

APPLICATIONS:

• Most popular weight for the medium duty truck • Used on most trucks with tube type tires NOTE: 17 = BTLM + E

Available sizes: 1 oz - 8 oz

Quantity: 25/box (10 & 12 oz: 20/box, 14 & 16 oz: 10/box)

APPLICATIONS:

• Special weight for all Alcoa and Accuride (from 1983) aluminum tubeless heavy truck wheels; fits both sides of the wheel • Replace the "OS-TAL" and "DS-TAL" series • Use rim gauge RG2 to verify correct application (either OS-TAL or DS-TAL slot) • Recommend coated weights on all vehicles having alloy wheels NOTE: TALS = TAL = BTCAL

Available sizes: 1 oz - 6 oz Quantity: 25/box

CTZ

APPLICATIONS:

• Used on heavy duty trucks with Firestone or Accuride, Budd or Goodyear tubeless rims (except steel rims with curved edges) • Primarily used on rim widths of 6.75", 7.50" and 8.25" NOTE: CT = BTLT

Available sizes: 2 oz - 6 oz Quantity: 25/box





APPLICATIONS:

- Used on heavy duty trucks with Firestone or Accuride, Radial Commander rims
- Can be used with new strip steel rims with curved edges • Use rim gauge RG2 to verify correct application

Available sizes: 2 - 6 oz

Quantity: 25/box (10 & 12 oz: 20/box)



Lead Adhesive Wheel Weights

PERFECT QUIKSTIK™ SEGMENTED LEAD WHEEL WEIGHTS

- Only pre-cut pre-taped weight
- Each segment is stamped with the actual weight in ounces and grams
- Available in 1/2", 3/4" low profile and 3/4" truck weight design
- Wheel weight for racing/off road performance applications



484-11360



484-13360



484-00006



484-30360



484-00112

ASCOT NO.	MFG. NO.	WEIGHT	DESCRIPTION
	Р	ERFECT LI	EAD ADHESIVE
484-11360	100360	3 Oz.	Pre-Taped Weight 30 Strips of .25 Oz. Segments
484-10720	100720	3 Oz.	Pre-Taped Weight 60 Strips of .25 Oz. Segments
484-00012	200624S	3 Oz.	Pre-Taped Weight 48 Strips of .25 Oz. Segments
484-13360	200624	3 Oz.	Pre-Taped Weight 52 Strips of .25 Oz. Segments
484-30360	300360	6 Oz.	Pre-Taped Truck Weight 30 Strips of 1 Oz. Segments
484-00006	CL6	6 Oz.	Pre-Taped Truck Weight 30 Strips of 1 Oz. Segments
484-00112	CL12	12 Oz.	Pre-Taped Truck Weight 8 Strips of 2 Oz. Segments

PLOMBCO LEAD ADHESIVE WHEEL WEIGHTS

- Available with rubber tape or cold weather tape
- Cold weather tape: Save time and money by eliminating the need to heat the wheel when temperatures are below 40 degrees fahrenheit



312



314



412



612

ASCOT NO.	MFG. NO.	DESCRIPTION
	PLOMBCO	LEAD ADHESIVE: RUBBER TAPE
484-31230	312-30	30 - 6" Bars - 1/4 Oz. Segments - 3/4" Wide
484-31252	312-52	52 - 6" Bars - 1/4 Oz. Segments - 3/4" Wide
484-31430	314-30	30 - 6" Bars - 1/4 Oz. Segments - 1/2" Wide
484-41215	412-15	15 - 6" Bars - 1/2 Oz. Segments - 3/4" Wide
484-41230	412-30	30 - 6" Bars - 1/2 Oz. Segments - 3/4" Wide
484-51215	512-15	15 - 6" Bars - 1 Oz. Segments - 3/4" Wide
484-61215	612-15	15 - 6" Bars - 2 Oz. Segments - 1-1/4" Wide
	PLOMBCO LEA	D ADHESIVE: COLD WEATHER TAPE
484-31231	312-30BCW	30 - 6" Bars - 1/4 Oz. Segments - 3/4" Wide, Black
484-31233	312-30CW	30 - 6" Bars - 1/4 Oz. Segments - 3/4" Wide
484-31432	314-30CW	30 - 6" Bars - 1/4 Oz. Segments - 1/2" Wide
484-33252	312-52CW	52 - 6" Bars - 1/4 Oz. Segments - 3/4" Wide
484-41232	412-30CW	30 - 6" Bars - 1/2 Oz. Segments - 3/4" Wide
484-53215	512-15CW	15 - 6" Bars - 1 Oz. Segments - 3/4" Wide
484-63215	612-15CW	15 - 6" Bars - 2 Oz. Segments - 1-1/4" Wide



Steel Adhesive Wheel Weights

STEEL SEGMENTED WHEEL WEIGHTS

- Pre-cut weights
- No cutting, no pre-contouring and no waste
- Each segment is stamped with the actual weight in ounces
- US white "quick" tape



ASCOT NO.	MFG. NO.	DESCRIPTION
		STEEL ADHESIVE
484-16001	1184	1 Oz. Steel Adhesive Wheel Weights: 1 Oz. Strips, 4 Segments (18 Strips per Box)
484-17026	14308	1/4 Oz. Steel Adhesive Wheel Weights with Plastic Powder Coating: 1/4 Oz. Strips, 8 Segments (30 Strips per Box)
484-17127	12187	1/2 Oz. Steel Adhesive Wheel Weights: 1/2 Oz. Strips, 7 Segments (18 Strips per Box)
484-27026	14308W	1/4 Oz. White Steel Adhesive Wheel Weights with White Powder Coating: 1/4 Oz. Strips, 8 Segments (30 Strips per Box)
484-37026	14308B	1/4 Oz. Black Steel Adhesive Wheel Weights with Black Powder Coating: 1/4 Oz. Strips, 8 Segments (30 Strips per Box)

PERFECT QUIKSTIK™ SEGMENTED STEEL WHEEL WEIGHTS

- Only pre-cut, pre-taped weight
- No cutting, no pre-contouring and no waste
- Each segment is stamped with the actual weight in ounces and grams



ASCOT NO.	MFG. NO.	DESCRIPTION
	PERFECT (QUIK-STIK™ STEEL ADHESIVE
484-00300	SST300N	Pre-Taped Steel Weight - 3 Oz. Segments
484-00060	SSG060N	Pre-Taped Steel Weight - 60 Gram Segments
484-20624	200624ST	Pre-Taped Steel Weight - 3 Oz. Segments
484-20576	200576FE	Pre-Taped Steel Weight - 3 Oz. Segments (No QuikTAB™ feature.)
484-22576	200576FEBLK	Pre-Taped Black Steel Weight - 3 Oz. Segments (No QuikTab Feature)
484-30224	300224FE	Pre-Taped Steel Wheel Weight - 4 Oz. Segments (28 Strips per box)
484-31360	300360ST	Pre-Taped Steel Weight - 6 Oz. Segments

STEEL ADHESIVE WHEEL WEIGHTS

• USA "Easy Peel" tape • Tape on top

ASCOT NO.	MFG. NO.	DESCRIPTION
		BLACK STEEL ADHESIVE
484-10101	FSF101B	1/4 Oz. Adhesive Wheel Weight: 3 Oz. (48 Strips per Box)
484-10201	FSF102B	1/2 Oz. Adhesive Wheel Weight: 3 Oz. (48 Strips per Box)
484-10301	FSF103B	1 Oz. Adhesive Wheel Weight: 4 Oz. (48 Strips per Box)
484-67026	24308B	1/2 Oz. Adhesive Wheel Weight: 3.5 Oz. Strip (18 Strips per Box)
484-77026	34308B	1 Oz. Adhesive Wheel Weight: 4 Oz. Strip (18 Strips per Box)
		STEEL ADHESIVE
484-10100	FSF101C	1/4 Oz. Adhesive Wheel Weight: 3 Oz. (48 Strips per Box)
484-10102	FSF101CP	1/4 Oz. Adhesive Wheel Weight: 3 Oz. (48 Strips per Box) - Paper Backing
484-10200	FSF102C	1/2 Oz. Adhesive Wheel Weight: 3 Oz. (48 Strips per Box)
484-10300	FSF103C	1 Oz. Adhesive Wheel Weight: 4 Oz. (36 Strips per Box)
484-10400	FSF104C	2 Oz. Adhesive Wheel Weight: 6 Oz. (18 Strips per Box)


▲WARNING: For more information go to www.P65Warnings.ca.gov.





Steel Adhesive Wheel Weights

PLOMBCO STEEL ADHESIVE WHEEL WEIGHTS

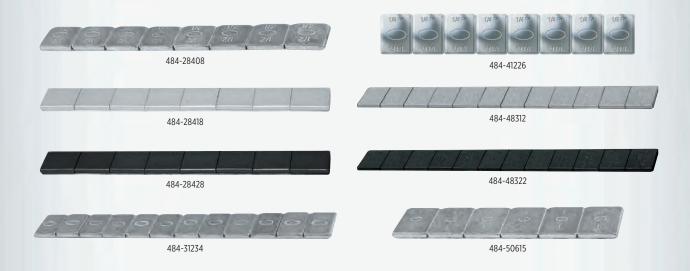

ASCOT NO.	MFG. NO.	TAPE TYPE	DESCRIPTION		
PLOMBCO STEEL ADHESIVE					
484-32230	312Fe-30CW	Cold Weather	30 * 6" Bars Precut in .25 Oz. Segments of .75" Wide		
484-32252	312Fe-52CW	Cold Weather	52 * 6" Bars Precut in .25 Oz. Segments of .75" Wide		
484-41226	412Fe	OE Adhesive	6", Bars Precut in .5 Oz. Segments of .75" Wide		
484-30836	308Fe-36	Rubber Base	2 Oz. strips (1/4 Oz) (36 Strips per Box)		
484-28408	408FE-28	Rubber Base	Steel Adhesive Wheel Weight: 4 Oz. (28 Strips per Box)		
484-28418	VL408FES-28	Rubber Base	Value Line Steel Adhesive Wheel Weight: 4 Oz. (28 Strips per Box)		
484-28428	VL408FEB-28	Rubber Base	Value Line Black Steel Adhesive Wheel Weight: 4 Oz. (28 Strips per Box)		
484-31234	312Fe-30	Rubber Base	Steel Adhesive Wheel Weight: 3 Oz. (30 Strips per Box)		
484-31500	VL315FEB	Rubber Base	Value Line Black Steel Adhesive Wheel Weight Roll: 15 lb., 1/4 Oz. Segments		
484-31501	VL315FES	Rubber Base	Value Line Steel Adhesive Wheel Weight Roll: 15 lb., 1/4 Oz. Segments		
484-35320	320Fe	Rubber Base	Steel Adhesive Wheel Weight Roll: 20 lb., .25 Oz. Segments		
484-40848	408Fe-48	Rubber Base	408Fe-48 Steel Adhesive Wheel Weight: 4 Oz. (48 Strips/Box)		
484-41500	VL415FEB	Rubber Base	Value Line Black Steel Adhesive Wheel Weight Roll: 15 lb., 1/2 Oz. Segments		
484-41501	VL415FES	Rubber Base	Value Line Steel Adhesive Wheel Weight Roll: 15 lb., 1/2 Oz. Segments		
484-42010	420Fe	Rubber Base	Steel Adhesive Wheel Weight Roll: 20 lb., .50 Oz. Segments		
484-48312	VL312FES-48	Rubber Base	Value Line Steel Adhesive Wheel Weight: 3 Oz. (48 Strips per Box)		
484-48322	VL312FEB-48	Rubber Base	Value Line Black Steel Adhesive Wheel Weight: 3 Oz. (48 Strips per Box)		
484-50615	506Fe-15	Rubber Base	Steel Adhesive Wheel Weight: 6 Oz. (15 Strips per Box)		
484-52001	520Fe	Rubber Base	Steel Adhesive Wheel Weight Roll: 20 lb., 1 Oz. Segments		
484-52312	312FE-52	Rubber Base	Steel Adhesive Wheel Weight: 3 Oz. (52 Strips per Box)		



Steel Adhesive Wheel Weight Rolls & Accessories

PERFECT STEEL ADHESIVE WHEEL WEIGHT ROLLS

- Familiar design: Features all of the same standard steel QuikStik characteristics
- Only use the amount of weight you need each time you balance Simply pull and rip • No cutting and no measuring • MADE IN THE USA



ASCOT NO.	MFG. NO.	DESCRIPTION
	PERF	ECT STEEL ROLLS
484-03200	SST32000N	.25 Oz. (1280 Segments)
484-07500	SSG7500N	5G (1500 Segments)
484-21576	200576FER	0.25 Oz. (704 Segments)
484-21624	200624STR	.25 Oz. (1280 Segments)
484-32360	300360STR	.5 Oz. (640 Segments)

PLOMBCO STEEL ROLLS

ASCOT NO.	MFG. NO.	DESCRIPTION
PLOMBCO S	STEEL RO	LLS: RUBBER TAPE
484-35320	320Fe	20 lb. Roll - 1272 Segments (1/4 Oz.)
484-42010	420Fe	20 lb. Roll - 640 Segments (1/2 Oz.)
484-52001	520Fe	20 lb. Roll - 320 Segments (1 07)



ADHESIVE WHEEL WEIGHT ROLLS

- Simply use the amount of weight you need each time you balance
- Convenient pull and rip design
- No cutting and no measuring
- · Rolled weights are more efficient and help reduce waste
- Plastic coated
- US white "quick" tape





ASCOT NO.	MFG. NO.	DESCRIPTION
	ADHESI	VE ROLLS: ZINC OR STEEL
484-47026	145KG	5 kg Steel Adhesive Wheel Weight Roll: 1/4 Oz. Segments (700 Segments per Roll)
484-57026	245KG	5 kg Zinc Adhesive Wheel Weight Roll: 5G





Wheel Weight Displays and Kits



METAL WHEEL WEIGHT RACK

• All-metal construction • 8 shelves • Includes dividers • 64 weight locations • Square tube to support the rack



486-31280



EMPTY DISPLAY FOR PROFESSIONAL WHEEL WEIGHT KIT

• EMPTY RACK ONLY



ASCOT NO.	MFG. NO.	DESCRIPTION
486-31280	MFR	Metal Wheel Weight Rac

ASCOT NO. MFG. NO. DESCRIPTION

486-00880 Kit 80 Empty Display for Professional Wheel Weight Kit





Wheel Weight Tools

PREMIUM HEAVY DUTY PROFESSIONAL WHEEL WEIGHT HAMMER

• Heavy duty construction • Black coated handles with red highlight • Designed for use on coated wheel weights • Will not mark alloy wheels • Replaceable plastic head available • Made in Taiwan

ASCOT NO.	MFG. NO.	DESCRIPTION
486-33580	3358	Premium Heavy Duty Wheel Weight Hammer - Red
486-33581	3358-B	Premium Heavy Duty Professional Wheel Weight Hammer - Black
486-33584	335804	Replacement Head

HEAVY DUTY ADHESIVE WHEEL WEIGHT REMOVAL TOOL

- Light weight and easy to use Easy and quick to remove stick-on wheel weights without damaging rims • The plastic cover of the jaws can protect the alloy rims from damaging or scratching • Adjustable jaws for different types and sizes of wheel weights
- · Replacement plastic tips available separately

ASCOT NO.	MFG. NO.	DESCRIPTION
486-00044	P4	Heavy Duty Adhesive Wheel Weight Removal Tool
486-00144	P4R	Replacement Tips for P4 (2-Pack)

PREMIUM FIBERGLASS WHEEL WEIGHT HAMMER

• Used to easily install and remove all types of steel and zinc clip-on wheel weights • Standard with large replaceable hook for prying • Fiberglass shaft for added durability • The hook is made from cold rolled steel • The striking face has a non-marring, surface protective medium-hard replaceable tip • Slip-resistant, ergonomic grip reduces arm strain & fatigue • MADE IN THE USA

ASCOT NO. MFG. NO. DESCRIPTION		MFG. NO.	DESCRIPTION	
	486-11000	P110	remium Fiberglass Wheel Weight Hammer	
	486-11002 P110-2		Replacement Small Hook for Premium Wheel Weight Hammer	
	486-11004	P110-4	Replacement Tip for Premium Wheel Weight Hammer	
	486-11005	8884254	Replacement Large End for P-110 Wheel Weight Hammer	

HEAVY DUTY TRUCK WHEEL WEIGHT HAMMER

• Will handle with ease the removal and attachment of HD truck weights • Fiberglass shaft for a lifetime of use • New chromalloy hooks designed for large wheels and large weights • Larger 1.75" tip for easier application along with heavier total tool weight require less striking effort • Longer handle provides added reach on larger wheels...comfortable, durable rubber handle • Use on all truck wheels • New industry standard • 12" total length • WEIGHT: 2 lbs. • MADE IN THE USA

ASCOT NO.	MFG. NO.	DESCRIPTION
486-11011	P110-T	Heavy Duty Truck Wheel Weight Hammer
486-11005	8884254	Replacement Large End for P-110 Wheel Weight Hammer
486-11006	15156	Replacement Tip for Premium Wheel Weight Hammer

COATED WHEEL WEIGHT HAMMER

• Protects valuable wheels from damage • Features replaceable plastic head

ASCOT NO.	MFG. NO.	DESCRIPTION
486-00233	P-3B	Soft Head Wheel Weight Hammer
486-00133	P-3H	Replacement Head for P-3B Wheel Weight Hammer





Wheel Weight Tools (cont.)

SPECIALTY WHEEL WEIGHT HAMMERS

ASCOT NO.	MFG. NO.	DESCRIPTION
486-07129	51400	Truck Wheel Weight Hammer
486-51480	51480	Deluxe Wheel Weight Hammer (Made of heat strengthened steel, comfortable vinyl handle grips, nylon durable hammer replaceable tip)

PASSENGER CAR WHEEL WEIGHT HAMMER

• The industry standard for passenger car wheel weight tools • Not for use on alloy or chrome wheels

ASCOT NO.	MFG. NO.	DESCRIPTION
486-00011	P-1	Economy Chrome Wheel Weight Hamme

EURO STYLE WHEEL WEIGHT HAMMER

• Heavy Commercial Duty Design • Coated Handles for Comfort • Nickel Plated Vanadium

ASCOT NO. MFG. NO. DESCRIPTION
486-00222 P-2C Euro-Style Wheel Weight Hammer

HEAVY DUTY ADHESIVE WHEEL WEIGHT REMOVERS

• For use with stick-on wheel weights: Removes emblems, body side moldings and stick-on wheel weights • Scrape off stickers without scratching paint or glass and gaskets from aluminum parts • One piece composite construction can be hit with a hammer • Knobbed handle to prevent hand from slipping while removing wheel weights • Made of high impact plastic • Resharpen with a file when needed

ASCOT NO.	MFG. NO.	DESCRIPTION
486-71510	71510	Red Heavy Duty Adhesive Wheel Weight Scraper
486-71511	71511	Black Heavy Duty Adhesive Wheel Weight Scraper

RIM GAUGES

• Convenient and economical gauges that guide you to the correct wheel weight application • Helpful with alloy wheels and thinner high strength steel wheels that have numerous new rim configurations

ASCOT NO.	MFG. NO.	DESCRIPTION
486-75001	RGP1	Rim Gauge For Passenger Cars
486-75002	RG2	Rim Gauge For HD Trucks



486-75002

486-00011

486-51480

486-07129

486-00222



Counteract Balancing Beads



- Perfect balance perfect wear Clean, trouble free balancing micro-beads provide continuous self-adjusting balance No clumping Just open the outside package and throw the inside bag into the tire • Method allows the use of an air blaster to seat the tire on the rim without contaminating the seating area
- · Air blaster pressure inside the tire will collapse the bag containing Counteract Balancing Beads or the package will break open and release its contents soon after driving • Available in application sizes from half ton vehicles to heavy trucks • All packaging is color coded to tire size on application chart










▲WARNING: For more information go to www.P65Warnings.ca.gov.

Just open the outside package and throw the inside bag into the tire!




ASCOT NO.	MFG. NO.	DESCRIPTION	QTY./CASE
451-00013	CBB-IP-LG	Injector Pump for Balancing Beads	N/A
451-00203	3 Oz. BP	3 Oz. Bag in Bag	96
451-00204	4 Oz. B	4 Oz. Bag in Bag	92
451-00205	5 Oz. B	5 Oz. Bag in Bag	76
451-00206	6 Oz. B	6 Oz. Bag in Bag	64
451-00208	8 Oz. B	8 Oz. Bag in Bag	52
451-00210	10 Oz. B	10 Oz. Bag in Bag	40
451-00212	12 Oz. B	12 Oz. Bag in Bags	36
451-00214	14 Oz. B	14 Oz. Bag in Bag	32
451-00216	16 Oz. B	16 Oz. Bag in Bag	28



















WHEEL BALANCING

ECO BALANCE

• Economical, high quality balancing bead, small enough to be injected through the valve stem



ECO BALANCE XL

• A large balancing bead solution designed for use with extreme balancing conditions, vehicles and tires, but compatible with all applications • No need for a special valve core • Pre-measured bags include ECO branded valve cores



ASCOT NO.	MFG. NO.	DESCRIPTION	QTY./CASE	
ECO BALANCE (1 MM BEAD SIZE)				
451-01203	3 Oz. BP-EB	3 oz. Bag in Bag	96	
451-01204	4 Oz. B-EB	4 oz. Bag in Bag	92	
451-01206	6 Oz. B-EB	6 oz. Bag in Bag	64	
451-01208	8 Oz. B-EB	8 oz. Bag in Bag	52	
451-01210	10 Oz. B-EB	10 oz. Bag in Bag	40	
451-01212	12 Oz. B-EB	12 oz. Bag in Bag	36	
451-01214	14 Oz. B-EB	14 oz. Bag in Bag	32	
451-01216	16 Oz. B-EB	16 oz. Bag in Bag	28	
	ECO BAI	ANCE XL (2.55 - 3 MM BEAD SIZE)		
451-00603	ECOXL30Z	3 oz. Bag in Bag	96	
451-00604	ECOXL40Z	4 oz. Bag in Bag	92	
451-00606	ECOXL60Z	6 oz. Bag in Bag	64	
451-00608	ECOXL80Z	8 oz. Bag in Bag	52	
451-00610	ECOXL100Z	10 oz. Bag in Bag	40	
451-00612	ECOXL120Z	12 oz. Bag in Bag	36	
451-00614	ECOXL140Z	14 oz. Bag in Bag	32	
451-00616	ECOXL160Z	16 oz. Bag in Bag	28	
451-00618	ECOXL18LB	18 lb. Bucket	N/A	
451-00620	ECOXL200Z	20 oz. Bag in Bag	24	



COUNTERACT ATV/UTV DIY WHEEL BALANCING KITS

• Each DIY kit comes with everything you need to balance your tires at home in your garage • Pre-measured bags of Counteract Balancing Beads for your tire size • Includes valve cores, valve caps, valve core remover, injection bottle and hose • KITS H, I, J: 40 kits per case • KITS K, L, M N: 14 kits per case





ASCOT NO.	MFG. NO.	DESCRIPTION	QTY./CASE
451-04042	Kit H	4 x 2 Oz. with Kit	40
451-04223	Kit I	2 x 2 Oz./2 x 3 Oz. with Kit	40
451-04043	Kit J	4 x 3 Oz. with Kit	40
451-04044	Kit K	4 x 4 Oz. with Kit	14
451-04046	Kit L	4 x 6 Oz. with Kit	14
451-04048	Kit M	4 x 8 Oz. with Kit	14
451-04410	Kit N	4 x 10 Oz. with Kit	14







COUNTERACT MOTORCYCLE DIY KITS

• Each kit contains pre-measured bags, plastic bottle with hose for installation, valve caps and cores, along with a valve core remover cap





Kit B



Kit A



451-03022 Kit D

451-03034 Kit J

ASCOT NO.	MFG. NO.	DESCRIPTION	QTY./CASE
451-03011	Kit A	1 oz (2)	40
451-03012	Kit B	1 oz (1) & 2 oz (1)	40
451-03013	Kit C	1 oz (1) & 3 oz (1)	40
451-03022	Kit D	2 oz (2)	40
451-03023	Kit E	2 oz (1) & 3 oz (1)	40
451-03233	Kit F	2 oz (1) & 3 oz (2)	40
451-03223	Kit G	2 oz (2) & 3 oz (1)	40
451-03224	Kit H	2 oz (4)	40
451-03232	Kit I	2 oz (2) & 3 oz (2)	40
451-03034	Kit J	3 oz (4)	40

COUNTERACT MOTORCYCLE DEALER PACKS

• Each dealer bag contains 4 pre-measured bags of Counteract Motorcycle Balancing Beads • Includes 4 valve cores & 4 valve caps • Typically for shop use but may also be sold at a retail level for DIY customers looking for replacement product



















ASCOT NO.	MFG. NO.	DESCRIPTION	QTY./CASE
451-05001	MK10Z	4 x 1 Oz. pre-measured bags	160 Applications (40 Dealer Bags)
451-05002	MK20Z	4 x 2 Oz. pre-measured bags	128 Applications (32 Dealer Bags)
451-05003	MK30Z	4 x 3 Oz. pre-measured bags	96 Applications (24 Dealer Bags)

EQUAL FLEXX™ Tire Balancing



IMI EQUAL FLEXX is an adaptive, internal wheel-end balancing solution that reduces fuel and tire costs by reducing vibration from the wheel end. Developed in partnership with the foremost experts in vibration analysis and testing, its soft, dry particles are engineered to continuously balance tires, creating a smoother ride and more even tire wear for the life of the tire. FLEXX will never damage the tire casing, wheel, or TPMS units. It does not void tire manufacturer warranties.









ASCOT NO.	MFG. NO.	DESCRIPTION
451-32016	EQFXWC32	EQUAL FLEXX Drop In Bag (32) W pkgs. (16 Oz.)
451-40004	EQFXEC40	EQUAL FLEXX Drop In Bag (40) E pkgs. (4 Oz.)
451-40006	EQFXDC40	EQUAL FLEXX Drop In Bag (40) D pkgs. (6 Oz.)
451-40008	EQFXCC40	EQUAL FLEXX Drop In Bag (40) C pkgs. (8 Oz.)
451-40010	EQFXBC40	EQUAL FLEXX Drop In Bag (40) B pkgs. (10 Oz.)
451-40012	EQFXAC40	EQUAL FLEXX Drop In Bag (40) A pkgs. (12 Oz.)
451-40016	EQFXFC40	EQUAL FLEXX Drop In Bag (40) F pkgs. (3 Oz.)

BEFORE INSTALLING, READ THE QUANTITY CHART.

SIMPLY DROP THE FLEXX BAG INTO THE TIRE BEFORE MOUNTING. DO NOT TEAR OR OPEN BAG.

MOUNT THE TIRE ON THE WHEEL, INFLATE AND ADJUST THE AIR PRESSURE OF THE TIRE.

INSTALL FILTERED VALVE CORE & IDENTIFICATION SLEEVE

AVOID OVER-LUBRICATING BEAD OR INSTALLING FLEXX IN TIRES WITH SEALANT.

CONTENTS ARE NON-TOXIC, ENVIRONMENTALLY SAFE & NON-FLAMMABLE.





FUEL COST



PRODUCTIVITY



TIRE WEA



SMOOTHER

magnum*

MAGNUM+ Tire Balancing

MAGNUM+ BALANCING COMPOUND

· An advanced technology dry tire balancing compound, with superior tire balancing properties • Formulated from specially-processed multiple-density materials

• Provides continuous and lasting tire balancing for standard, low-profile and wide-base medium truck tires and heavy duty light truck tires • No more timeconsuming and expensive mechanical balancing, perfect self-adjusting balance in all your tires, less vehicle wear and tear, easier maintenance and less driver fatigue



451-00200



ASCOT NO.	MFG. NO.	SAMPLE TIRE SIZE	QTY./CASE
451-00150	LTP150	LT215/75/R15	36
451-00200	LTP200	LT235/85R16	24
451-00250	MTP250	33x12.50R15	24
451-00300	MTP300	245/75R22.5	18
451-00400	MTP400	11R22.5/11R24.5	12
451-00500	MTP500	12R24.5	12
451-06000	DPP600	365/80R22.5	6
451-07000	DPP700	425/65R22.5	6

MAGNUM+ FLEET TUBS

• Each tub is labeled and packaged for a specific premeasured insert bag • Bulk discounts apply to each tub size • Tubs are durable and reusable with a resealable lid • Complete with a full color label, tubs look great in retail settings and on delivery trucks • Eliminates wasted extra packaging and tubs are recyclable







ASCOT NO.	RANGE	NOM. WT.	DESCRIPTION	QTY./CASE
451-10003	LFP100 INSERT™	3 Oz.	Fleet Tub – Contains 24 LTP100	24
451-15405	LFP150 INSERT™	4-1/2 Oz.	Fleet Tub – Contains 24 LTP150	24
451-20605	LFP200 INSERT™	6-1/2 Oz.	Fleet Tub – Contains 24 LTP200	24
451-25805	MFP250 INSERT™	8-1/2 Oz.	Fleet Tub – Contains 22 MTP250	22
451-31005	MFP300 INSERT™	10-1/2 Oz.	Fleet Tub – Contains 18 MTP300	18
451-40013	MFP400 INSERT™	13 Oz.	Fleet Tub – Contains 14 MTP400	14
451-60021	DFP600 INSERT™	21 Oz.	Fleet Tub – Contains 6 DPP600	6
451-72305	DFP700 INSERT™	23-1/2 Oz.	Fleet Tub – Contains 6 DPP700	6



Alignment Tool Assortments

Camber/Caster Tools

Heavy Duty Alignment

Automotive Alignment Equipment





Alignment Tool Assortments

PASSENGER CAR ASSORTMENT **BOARD SET**

- Board set includes the most popular shims, cam kits and adjustable strut plates • A "must have" for any shop performing 4 wheel alignments on passenger cars
- Shipped with high-strength polymer display board

• CONTAINS ONE OF EACH OF THE FOLLOWING: 26012, 26014, 82380, 82385, 82390, 86250, 86325,

86350, 86375, 87385, 87420, 87500, 87520


ASCOT NO. MFG. NO. DESCRIPTION

251-88260

Passenger Car Assortment Board Set







LIGHT TRUCK/SUV SLEEVE ASSORTMENT BOARD SET

· This great new board set includes the most popular parts for aligning today's trucks and SUVs. Don't be caught without the part that you need • Shipped with the polymer display board

• CONTAINS ONE OF EACH OF THE FOLLOWING:

66050, 66025, 66037, 72055, 81250, 81260, 81270, 81280, 81290, 84120, 87365

ASCOT NO.

MFG. NO.

DESCRIPTION

251-88270 88270 Light Truck/SUV Sleeve Assortment Board





Camber/Caster Terms & Definitions

ALIGNMENT TERMS for CAMBER

DEFINITION Inward or outward tilt of

the top of the wheel

PURPOSE Adjustment centers the vehicle's load on

tire, eliminating pull. Proper adjustments

reduce camber tire wear and pulling

METHODS OF (1) Shims; (2) Cams; (3) Slotted

ADJUSTMENT Frame; (4) Strut Rod; (5) Wedges; (6) Ball Joint Rotation; (7) Offset Bearing Plates; (8) Cam Bolts; (9) Eccentrics; (10) Offset Ball Joints

O CAMBER When wheel and tire assembly

are in exact vertical position

POS. CAMBER When the top of the wheel

and tire assembly is tilted out, or away from the engine

NEG. CAMBER The top of the wheel and tire assembly

is tilted in toward the engine

ALIGNMENT TERMS for CASTER

DEFINITION The forward or backward tilt of the

> upper ball joint, or top of the strut, relative to the lower ball joint

PURPOSE Caster affects steering stability and

steering wheel returnability

METHODS OF (1) Shims; (2) Cams; (3) Slotted Frame;

ADJUSTMENT (4) Strut Rod; (5) Strut Rotation; (6) Cradle Movement; (7) Offset Ball Joint; (8) Sliding Ball Joint

O CASTER The upper ball joint or top strut bearing

> and lower ball joint are in the same plane as viewed from the side of the vehicle

POS. CASTER The upper ball joint or top strut bearing

> is toward the rear of the vehicle in relation to the lower ball joint as viewed from the side of the vehicle

NEG. CASTER The upper ball joint or top strut bearing

> is toward the front of the vehicle in relation to the lower ball joint as viewed from the side of the vehicle





Camber/Caster Tools

FORD 4WD CAMBER/CASTER SLEEVE SET

· Change camber, caster or both at the same time. Remove the tire, cotter pin and upper ball joint stud nut and break the taper free between the stud and sleeve • To adjust camber/caster, the sleeve may be lifted and rotated 1/8 turn • Sized in 1/4° increments through 2° • One sleeve covers one side of the vehicle • ESTIMATED INSTALLATION TIME: .5 hr/side

ASCOT NO.	MFG. NO.	DESCRIPTION	APPLICATIONS
231-23100	23100	Complete Set	FORD 4WD: 1980 & Up F250, F350, E250, E350, Full Size Bronco w/Ball Joints, 1980-96 F150, F250 (L/D)



231-23100

FORD & DODGE CAMBER/CASTER SLEEVE SET

• Sleeves change camber, caster or both at the same time • Remove the upper ball joint stud nut and break taper free between the stud and sleeve • Calculate the change and install correct sleeve • Sized in 1/4° increments • One sleeve covers one side of the vehicle • ESTIMATED INSTALLATION TIME: .5 hr/side

ASCOT NO.	MFG. NO.	DESCRIPTION	APPLICATIONS
231-23130	23130	Complete Set	DODGE: 1994-99 BR2500 4WD, BR3500 2WD/4WD Ford 4WD: 1992 & Up F350 Crew Cab Pickup, Some F250 4WD w/ Straight Axle, 1999 & Up Super Duty 250, 350, 450, 550



231-23130

23220 & 23230 SLEEVE SETS

• Ford changed the axle design in 2005 on their Heavy Duty trucks. These sleeves correct camber and caster on the new 4x4 F250 and F350 Super Duty trucks

ASCOT NO.	MFG. NO.	DESCRIPTION	APPLICATIONS
231-23220	23220	Complete Set	FORD 4WD: 2005 & Up F250, F350 Super Duty; FORD RWD: 2005 & Up F250, F350 Solid Axle/Coil Spring
231-23230	23230	Complete Set	FORD RWD/4WD: 2005 & Up F450, F550 Coil Springs; CHEVY/ GMC 4WD: 2005 & Up Kodiak K4500, Topkick K5500





231-23220

231-23230

FORD 2 & 4WD CAMBER/CASTER TRUCK SLEEVES

• Sleeves are widely used to adjust caster and/or camber on many Ford 2WD/4WD trucks • To install, simply loosen and remove upper ball joint pinch bolt. Remove top snap ring if one is present • Sleeves allow for larger caster and camber changes which may be required on lowered and raised trucks • SET INCLUDES: Nine of the XRTM Camber/Caster truck sleeves

ASCOT NO.	MFG. NO.	DESCRIPTION	APPLICATIONS
231-23180	23180	Complete Set	FORD 2WD:1987 & Up F350, 1987-96 F150, F250 (L/D), 1989- 90 Bronco II, 1992 & Up E150, E250, E350, 1991-94 Explorer, 1989 - 97 Ranger, 1999 & Up F250, F350 Super Duty; MAZDA 2WD:1991-97 Navajo, Pickup; Ford 4WD:1991-94 Explorer, 1990 - 97 Ranger; MAZDA 4WD:1991-97 Navajo, Pickup



231-23180

BALL JOINT PRESS SLEEVES

• These specially designed sleeves make installation of the #23510-40 ball joints easy and profitable for the installer • Sleeves are designed to match the angle of the yoke on the axle housing to insure proper ball joint

ASCOT NO.	MFG. NO.	DESCRIPTION
231-23580	23580	Bushing Sleeves For Ball Joints 23510, 23520, 23530, 23540







F150/250 (L/D) 2/4WD CAMBER/CASTER KIT

ASCOT NO. MFG. NO. 231-87385 87385

DESCRIPTION

APPLICATIONS

F/150/250, 2/4WD Camber Caster Kit

FORD: 1997-03 F150, F250 (L/D), 1997-02 2WD & 4WD Expedition; LINCOLN: 1997-02 2WD & 4WD Navigator

GM 2WD & 4WD CAMBER/CASTER KIT

ASCOT NO. 231-87400

MFG. NO. 87400

DESCRIPTION

GM 2/4WD Camber Caster Kit

GM: 1988-99 1500, 2500, 3500 C & K series 2WD/4WD trucks, 1990 & up Safari AWD Van; CHEVROLET: 1990 & up Astro AWD Van

GM 2WD & 4WD CAMBER/CASTER KIT

ASCOT NO. 231-87500

MFG. NO. 87500

DESCRIPTION

APPLICATIONS

Ford Explorer Camber/ Caster Set FORD: 1995-01 2WD & 4WD Explorer, 1998 & up 2WD & 4WD Ranger; MERCURY: 1995-01 2WD & 4WD Mountaineer;

MAZDA: 1998 2WD & 4WD B-Series Pickup

EXPLORER CAMBER/CASTER KIT

• Set of 4 cams for quick installation without having to remove the upper control arm bolt

ASCOT NO. MFG. NO. 231-87310 87310

DESC.

APPLICATIONS

Explorer Camber/ Caster Kit

FORD: 1995-01 2WD & 4WD Explorer, 1998-02 2WD & 4WD Ranger; MERCURY: 1995-01 & up 2WD & 4WD Mountaineer; MAZDA: 1998 2WD & 4WD B-Series Pickup

DODGE TRUCK CAMBER/CASTER KITS

• KIT INCLUDES: 4 cam and bolt sets to cover both sides of the vehicle

ASCOT NO.	MFG. NO.	DESCRIPTION	APPLICATIONS
231-23755	23755	Dodge Camber/Caster Kit, 4 Wheel Drive	DODGE: 2002 & Up 1500 Series - 4 Wheel Drive
231-23765	23765	Dodge Camber/Caster Kit, 2 Wheel Drive	DODGE: 2002 & Up 1500 Series - 2 Wheel Drive

EZ-CAM™ XR - CAMBER KITS FOR DOMESTIC/IMPORT TWO **BOLT STRUTS (PAIR)**

• Designed for non-slotted struts • EACH KIT CONTAINS: Two cam Bolt assemblies, enough for both sides of the vehicle

ASCOT NO. 223-81240

MFG. NO. 81240

DESCRIPTION

Camber Kits for Domestic/ Important Two Bolt Struts (Pair) APPLICATIONS

ALFA ROMEO, FIAT, LANCIA









Camber/Casters Tools (cont.)

JEEP AND DODGE OFFSET BALL JOINT

• Offset ball joint replaces the O.E. upper ball joint to provide up to 2° camber/caster change on several previously non-adjustable Jeep and Dodge vehicles • Comes with an installation template for accurate change

ASCOT NO.	MFG. NO.	DESCRIPTION
237-23510	23510	1/2° Positive Or Negative Change
237-23520	23520	1° Positive Or Negative Change
237-23530	23530	1-1/2° Positive Or Negative Change
237-23540	23540	2° Positive Or Negative Change

APPLICATIONS

JEEP: 1984 & up 2WD/4WD Cherokee, Comanche, 1987 & up Wrangler; 1990 & up Renegade, 1984 & up 2WD/4WD downsize Wagoneer; 1993 & up Grand Cherokee, DODGE: 1994 -2001 BR1500 4WD & BR2500 (L/D) Pickups



FORD F150 KIT

• Easily adjust camber and caster on F150s from '04 and up (including late model) and '07 & up Expeditions

ASCOT NO.	MFG. NO.	DESCRIPTION	APPLICATIONS
231-86250	86250	Ford F150 Kit	FORD: 2004 & Up F150, 2007 & Up Expedition; LINCOLN: 2006 & Up Mark LT, 2007 & Up Navigator



DODGE CASTER / PINION ANGLE CAM

· Whether the truck is lifted or stock ride height, optimize caster and pinion angles for better tracking and axle/drive shaft position

ASCOT NO.	MFG. NO.	DESCRIPTION
222-82395	82395	Dodge Caster / Pinion Angle Cam



NISSAN CAM BOLT KIT

• FRONT ADJUSTMENT RANGE: Camber/Caster ±2.00 degree • 1 kit per wheel required

ASCOT NO.	MFG. NO.	DESCRIPTION
222-87520	87520	Nissan Cam Bolt Kit

TOYOTA BOLT KIT

• FRONT ADJUSTMENT RANGE: Camber/Caster ± 1.50 degree • 1 kit per wheel required

ASC	COT NO.	MFG. NO.	APPLICATIONS
222-	-25430	25430	TOYOTA 4WD: 1995-04 Tacoma; TOYOTA RWD: 1998-04 Tacoma PreRunner; TOYOTA 4WD&RWD: 1996-02 4-Runner
222-	-25435	25435	LEXUS AWD: 2003-09 GX; TOYOTA RWD: 2005 & up Tacoma PreRunner; TOYOTA 4WD: 2005 & Up Tacoma; TOYOTA 4WD&RWD: 2007-09 FJ Cruiser, 2003-09 4Runner
222-	-25440	25440	LEXUS AWD: 2010 & Up GX; TOYOTA 4WD&RWD: 2010 & Up FJ Cruiser, 2010 & Up 4Runner
222-	-25445	25445	TOYOTA: 01-07 Sequoia, 99-06 Tundra





HONDA CIVIC ADJUSTABLE CONTROL ARM

- The arm is built with SPC's xAxis™ sealed flex joint to reduce compliance
- Its' unique adjustment design permits on car adjustment of ±3° camber
- REAR ADJUSTMENT RANGE: Camber ± 3.0° REQUIRED: 1 per wheel

ASCOT NO. MFG. NO. DESCRIPTION

Honda Civic Adjustable Control Arm 222-67475 67475

HONDA/ACURA EZ ARM XR™

ASCOT NO.	MFG. NO.	ADJUSTMENT RANGE	APPLICATIONS
226-67030	67030	-2.00° To +3.40°	ACURA: Integra; HONDA: Civic, Del Sol, CRV, CRX
226-67230	67230	-4.00° To +6.00°	2001 and up Civic

HYUNDAI/KIA REAR EZ ARM XR™

• Provide up to ±29 camber and toe change • REAR ADJUSTMENT RANGE: Camber and Toe ±2.00° • 1 per wheel required

ASCOT NO.	MFG. NO.	DESCRIPTION	APPLICATIONS
226-67410	67410	Hyundai/ Kia Rear EZ Arm XR™	HYUNDAI: 2007 & Up Elantra; KIA: 2007 & Up Optima, 2007 & Up Rondo

HONDA EZ ARM XR™

• Adjustment range: -2.00° to +4.00° • NOTE: An O.E. style ball joint is integrated in this arm

ASCOT NO.	MFG. NO.	DESCRIPTION	APPLICATIONS
226-67090	67090	Honda/Acura EZ Arm XR™	HONDA: 1998-2002 Accord; ACURA: 2001 3.2CL, 1999-2002 3.2TL 1996 & Up 3.5RL
226-67290	67290	Honda EZ Arm XR™	ACURA: 2001-06 MDX, 2004-08 TSX; HONDA: 2003-07 Accord, 1999- 04 Odyssey, 2003-08 Pilot

HONDA FRONT CAMBER/CASTER CONTROL ARM

• O.E. style control arm now makes it possible to adjust camber and caster on newer Honda Civics • Arm may be used on vehicles that have retained their stock ride height and vehicles that have been lowered for performance and appearance

ASCOT NO.	MFG. NO.	DESCRIPTION	APPLICATIONS
222-62010	62010	Honda Front Camber/ Caster Control Arm	HONDA: 1996-2000 Civic

ADJUSTABLE UPPER CONTROL ARM

• Camber adjustment from -1° to + 4° • 1 control arm per wheel

ASCOT NO. MFG. NO. DESCRIPTION **APPLICATIONS** 236-00100 HONDA: 1996-2000 Civic, CA100 Adjustable Upper Control Arm 1997-2000 CRV







Camber/Casters Tools (cont.)

CHRYSLER/DODGE FRONT CONTROL ARM

- Arms fit both the right and left side Camber adjustment ± 2.0 degrees
- Caster adjustment ± 1.5 degrees 1 per wheel required

ASCOT NO.	MFG. NO.	APPLICATIONS
222-66040	66040	CHRYSLER: 2005-2008 300 RWD; DODGE: 2006 - 2008 Challenger, 2006 - 2008 Charger RWD, 2005 - 2008 Magnum RWD
222-66045	66045	CHRYSLER: 2009 & Up 300; DODGE: 2009 & Up Challenger, 2009 & Up Charger RWD
222-66047	66047	CHRYSLER: 2005 & Up 300 RWD; DODGE: 2006 & Up Charger AWD, 2005 - 2008 Magnum AWD



• SPC's unique adjustment design permits on car adjustment of ±3.0° camber and is adjustable for life • SPC's forged steel design adds adjustment to the arm without a weight penalty vs. the OE arm it will replace • REAR ADJUSTMENT RANGE: Camber ± 3.0 degrees • 1 per wheel required

ASCOT NO. MFG. NO.

222-67467 67467 2016 & Up Honda Civic (Incl. Si/Hybrid)



• Even with the suspension loaded, this kits makes changes of up to +/-1.5 degree camber/caster fast and easy

MFG. NO. DESCRIPTION ASCOT NO

223-82360 82360 Lower Control Arm Camber Kit

REAR ADJUSTABLE LOWER CONTROL ARM

• This hi-strength adjustable lower rear camber arm provides ± 2.0 degrees of change for the popular BRZ, FR-S, WRX and Impreza • REAR ADJUSTMENT RANGE: Camber ± 2.0°, Toe 1.5° fixed

• 1 per wheel required • RECOMMENDED TOOLS: 67647 Bushing Sleeves, 72509 Ball Joint Press

DESCRIPTION ASCOT NO MFG NO

67660 222-67660 Rear Adjustable Lower Control Arm

ADJUSTABLE BALL JOINT

· Adjustable upper ball joints make front camber/caster adjustments easy on late model Honda and Acura • ADJUSTMENT: -1.50° to +1.50°

ASCOT NO.	MFG. NO.	DESCRIPTION	APPLICATIONS
226-67125	67125	Honda/Acura Adjustable Ball Joint	ACURA: 1996 - 97 2.2CL, 1998 - 99 2.3CL, 1996 - 99 3.0CL, 2001-04 3.2CL, 1999 -2004 TSX; 1996- 98 2.5 TL; 3.2 TL; HONDA: 1998 - 02 Accord, 1989 - 91 Civic & CRX, 1995 - 98 Odyssey
226-67165	67165	Honda/Acura Adjustable Ball Joint	ACURA: 1995 - 98 2.5TL, 1992 - 94 Vigor (front); HONDA: 1992 - 02 Prelude (Rear) 1992 - 1996 Prelude (Front)

PERFORMANCE BALL JOINT PRESS SET

• Can remove the ball joint from the front upper control arm without removing the arm from the vehicle

ASCOT NO. MFG. NO. 227-40920 40920 Performance Ball Joint Set







226-67125



EZ SHIMS™



FULL CONTACT DUAL ANGLE EZ SHIMS™

• Full contact/dual angle • Corrects toe and camber with one shim • Total of three shims cover most shimable FWD vehicles

ASC	OT NO.	MFG. NO.	DESCRIPTION	APPLICATIONS
221-7	75200	75200	Blue	Audi, Chevrolet/Geo, Chrysler, Dodge, Eagle, Isuzu, Plymouth, Volkswagen
221-7	75400	75400	Grey	Acura, Audi, Buick, Chevrolet, Chrysler, Dodge, Ford, Honda, Mercury, Nissan, Oldsmobile, Plymouth, Pontiac
221-7	75600	75600	Yellow	Buick, Cadillac, Chevrolet, Chrysler, Geo, Olds, Pontiac, Scion, Toyota, VW
221-7	75800	75800	Red	Buick, Cadillac, Chevrolet, Geo, Lexus SP, Oldsmobile, Pontiac, Toyota



 \bullet Camber and caster adjustment up to +/- 2-3/4° \bullet 1 bushing per wheel

ASCOT NO.	MFG. NO.	DESCRIPTION	APPLICATIONS
231-00532	532	Ford/Dodge Truck Adjustable Camber/Caster Bushing	FORD: 1980-1985 4WD F150 and Bronco, 1980-2000 4WD F250 and F350; DODGE: 1994-1999 2WD/4WD 2500 Trucks, 1994-1999 4WD 3500 Trucks
231-00535	535	Ford Downsize Truck Adjustable Camber/Caster Bushing	FORD: 1983-1990 4WD Downsize Trucks
233-23120	23120	SET (9) 4WD CAM/CAS Sleeves. Set 23120 contains 23121 thru 23129	FORD 4WD: 1983 - 89 Bronco II; 1990 (Early) Bronco II; 1983 - 89 Ranger
233-23130	23130	SET (9) 4WD & RWD SLEEVES. Set contains one each of 23131 thru 23139	FORD 4WD: 1997 - 98 F250 (H/D), 1999 - 04 F250, F350, F450, F550, Super Duty 2000 - 05 Excursion, 1992 - 98 F350 Crew Cab; FORD RWD: 1999 - 04 F450, F550 Super Duty; DODGE 4WD: 1994 - 99 BR2500, BR3500; DODGE RWD: 1994 - 02 BR3500 w/Mono Beam



• Pulls both O.E. and most aftermarket camber/caster sleeves quickly and efficiently without damaging the ears of the sleeve • Heat treated high strength steel • Single-unit design with no loose parts

ASCOT NO.	MFG. NO.	DESCRIPTION	APPLICATIONS
247-77880	77880	Ford Combination Sleeve Puller	FORD: Twin I-Beam w/ Uppe And Lower Ball Joints

FASTRAX™ COMPLETE ADJUSTABLE CAMBER/CASTER GAUGE

• Portable, hands-free alignment can be done quickly and easily with the FasTrax™ Adjustable Camber/Caster Gauge stock or Specialty Product's sliding ball joints

ASCOT NO.	MFG. NO.	WHEEL SIZE
223-91000	91000	13 "- 18"

FASTRAX™ CAMBER/CASTER GAUGE

• Add quick alignment checks to your fleet PMs • Save tire wear & fuel costs

ASCOT NO.	MFG. NO.	WHEEL SIZE
223-91040	91040	21" - 26"



231-00532

247-77880

223-91000



Heavy Duty Alignment

TRUCK AXLE SHIMS (HEAVY DUTY ZINC ALLOY)

• Available in 1/2° changes up to a 4° caster change, either positive or negative • Packaged six per box • Any solid axle 2 or 4 wheel drive vehicle

ASCOT NO.	MFG. NO.	WIDTH	DEGREE TAPER
243-00891	89199	3"-3-1/2"-4"	1/2°
243-00892	89299	3"-3-1/2"-4"	1°
243-00893	89399	3"-3-1/2"-4"	1-1/2°
243-00894	89499	3"-3-1/2"-4"	2°
243-00895	89599	3"-3-1/2"-4"	2-1/2°
243-00896	89699	3"-3-1/2"-4"	3°
243-00897	89799	3"-3-1/2"-4"	3-1/2°
243-00898	89899	3"-3-1/2"-4"	4°

TRUCK AXLE SHIMS (HEAVY DUTY ZINC ALLOY)

• One part number gives you six shims in a box

ASCOT NO.	MFG. NO.	WIDTH	DEGREE TAPER	BOX WT.
243-00841	84199	2-1/4"- 2-1/2"	1/2°	1-1/2 Lbs.
243-00842	84299	2-1/4"- 2-1/2"	1°	1-1/2 Lbs
243-00843	84399	2-1/4"- 2-1/2"	1-1/2°	2 Lbs.
243-00844	84499	2-1/4"- 2-1/2"	2°	2-1/4 Lbs.
243-00845	84599	2-1/4"- 2-1/2"	2-1/2°	2-3/4 Lbs.
243-00846	84699	2-1/4"- 2-1/2"	3°	2-3/4 Lbs.
243-00847	84799	2-1/4"- 2-1/2"	3-1/2°	3-1/4 Lbs.
243-00848	84899	2-1/4"- 2-1/2"	4°	3-1/4 Lbs.

PETERBILT AIR LEAF ADJUSTING SHIM

ASCOT NO.	MFG. NO.	SIZE	QTY.
246-35010	35010	1/32"	6
246-35011	35011	1/16"	6
246-35012	35012	1/8"	6

FREIGHTLINER ADJUSTING SHIMS

ASCOT NO.	MFG. NO.	SIZE	QTY.
246-35020	35020	1/32"	6
246-35021	35021	1/16"	6
246-35022	35022	1/8"	6

KENWORTH AIR GLIDE SPACER FOR EIGHT BAGGERS

ASCOT NO.	MFG. NO.	THICKNESS	QTY.
241-35001	35001	1/32"	6
241-35002	35002	1/16"	6
241-35003	35003	1/8"	6
241-35004	35004	1/4"	6
241-35005	35005	1/2"	6
241-35006	35006	3/4"	6
241-35007	35007	1"	6













VOLVO/WHITE TANDEM SHIMS

ASCOT NO.	MFG. NO.	SIZE	QTY.
246-35030	35030	1/32"	6
246-35031	35031	1/16"	6
246-35032	35032	1/8"	6

I.H.C. TORQUE ARM SHIMS

ASCOT NO.	MFG. NO.	SIZE	QTY.
246-35040	35040	1/32"	6
246-35041	35041	1/16"	6
246-35042	35042	1/8"	6

SINGLE SLOT TANDEM TRUCK SHIMS

ASCOT NO.	MFG. NO.	SIZE	QTY.
246-35060	35060	1/32"	6
246-35061	35061	1/16"	6
246-35062	35062	1/8"	6

FREIGHTLINER SHIMS FOR AIR **GLIDE SUSPENSION**

ASCOT NO.	MFG. NO.	SIZE	QTY.
246-35070	35070	1/32"	6
246-35071	35071	1/16"	6
246-35072	35072	1/8"	6

PETERBILT/KENWORTH FLEX AIR SUSPENSION SHIMS

• Adjust thrust angle and toe by shimming the torque arms

ASCOT NO.	MFG. NO.	SIZE	QTY.
246-36010	36010	1/32"	6
246-36011	36011	1/16"	6
246-36012	36012	1/8"	6

S-CAM BUSHING EXTRACTOR

ASCOT NO.	MFG. NO.	DESCRIPTION
247-91860	91860	S-Cam Bushing Extractor

TANDEM ALIGNMENT SET

• These alignment angle shims are now available in a heavy duty metal box to help you organize all of your shims • Packaged with a large variety of shims and an organization chart inside the lid to make reordering and organization of shims quick and easy

ASCOT NO.	MFG. NO.	DESCRIPTION
246-36000	36000	Tandem Alignment Set



246-35030













Heavy Duty Alignment (cont.)

GM UPPER CONTROL ARM PUNCH

• For removing the alignment inserts on the upper control arm alignment brackets without damaging the alignment bracket • Lubricate before use • Not for use with impact wrenches (air tools)

ASCOT NO.	MFG. NO.	DESCRIPTION	APPLICATIONS
247-74910	74910	GM Upper Control Arm Punch	CHEVROLET/GM: 1989 - 1998 2WD/4WD C & K Series 1/2, 3/4 & 1 Ton Trucks,1991 & Up AWD Astro Vans & AWD Safari Vans

CANYON/COLORADO SOCKET

• This special grooved socket fits over the end of the bolt allowing the technician to turn the alignment cams to change alignment angles after loosening the lock nut

ASCOT NO.	MFG. NO.	DESCRIPTION
236-45938	45938	Canyon/Colorado Socket

FORD SUPER DUTY TIE ROD SLEEVE ADJUSTER

• Extra long bar gives you maximum leverage to loosen rusted sleeves without injuring your knuckles • 8-position tool allows 360° rotation without removing the adjuster block from the sleeve

ASCOT NO.	MFG. NO.	DESCRIPTION
236-77350	77350	Ford Super Duty

AIR BLADDER CAMBER ADJUSTING TOOL

• Simply loosen the strut mount bolts, place the adjuster between the tire and strut, and inflate • To adjust camber slowly release the air until the wheel retracts to the specified alignment setting, tighten bolts and the alignment is done • INCLUDES: A specially designed, puncture resistant air bladder, 2' air hose, a low pressure pop-off valve to prevent overinflating and an air control valve for inflating and controlled deflating

ASCOT NO.	MFG. NO.	DESCRIPTION
228-61400	DOWTC614	Air Bladder Camber Adjusting Tool

H/D STEEL WHEEL RIM STRAIGHTENING TOOL

• For quick and easy removal of indentations on wheel flanges and rims of most vehicles

ASCOT NO.	MFG. NO.	DESCRIPTION
247-08130	81309	H/D Steel Wheel Rim Straightening Tool

INNER TIE ROD END WRENCH SET

• CONTAINS: 89105, 89106, 89107, 89108 • CAUTION: Not for use with impact wrenches (Air tools)

ASCOT NO.	MFG. NO.	DESCRIPTION
227-89000	89000	Inner Tie Rod End Wrench Set









Automotive Alignment Equipment

DWA1000XL WHEEL **ALIGNMENT SYSTEM**

The DWA1000XL wireless alignment system utilizes 8 Sensor CCD Technology and MEMS static accelerometers, providing the latest in measuring technology. CEMB's DWA 1000 total vehicle wheel alignment machine improves safety and driver comfort, reduces fuel consumption and tire wear. Comes fully assembled.

DWA3500 3D HIGH DEFINITION WHEEL ALIGNMENT SYSTEM

DWA3500 is the new 3D wheel alignment system for cars and light commercial vehicles, with a completely redesigned cabinet with drawers and housings for printer and accessories, an easy accessibility for maintenance and an advanced software. The 3D camera support beam is motorized and fully automated. Camera beam height is automatically adjusted to the height of lift. The software system, operations with clear and user-friendly graphics.



ASCOT NO. 203-10003

MFG. NO.

DESCRIPTION

DWA1000XL DWA1000XL Wheel Alignment System

ASCOT NO. 203-35000

MFG. NO. DWA3500

DESCRIPTION

DWA3500 Wheel Alignment System with Automatic Camera Beam



Automotive Alignment Equipment (cont.)



BRANICK STRUT SPRING COMPRESSOR

- Known as "the standard in the industry," the 7600 handles the heaviest coilover-shocks, on light trucks and SUV's, without needing additional adapters
- It also has longer handles for extra torque The multi-positions upper spring hooks can be arranged for ultimate flexibility to fit "factory" coil spring configurations • It has a longer compression stroke that can even handle the Jeep KX Cherokee Trailhawk and an integrated structural ring guard • Whether long, short, narrow, or angled, the 7600 will get it done • MADE IN THE U.S.A.



RADIAL RUNOUT GAUGE

Radial runout is an out of round condition in which the radius of the wheel or tire is not consistent from the wheel center to any point on the rim or the tread. Tire and wheel radial runout are often factors in troubleshooting ride and handling and in maintaining correct wheel balancing to reduce vibration.

- Measures vehicle vibration sensitivity Measures out of round condition
- EASY TO USE: only 2 adjustments Pinpoints high or low spots in the tire • Determines accurate centering of tire and wheel mounting





ASCOT NO.	MFG. NO.	DESCRIPTION
228-07600	7600	Strut Spring Compressor
228-00761	761	Bench Mount for Strut Spring Compressor
228-00764	764	Mobile Cart for Strut Spring Compressor

MFG. NO. DESCRIPTION 247-33173 64250 Radial Runout Gauge



Battery Chargers & Testers

Lubrication & Sealants

Exhaust Hoses & Tailpipe Adapters

Bench Grinders & Shop Vises

Pliers & Screwdrivers

Shop Cleaners & Brushes

Shop Lights

Service Stickers

Tire Displays & Carts

Interior Protection Products

Studding Equipment

Drains, Pumps & Fluid Exchange

Safety Products

Wheel Chocks

Mechanic's Gloves

SERVICE AUTO & FLEET

BT608

STAYGURRENT

INTELLIGENT BATTERY SERVICE

















BMS RESET FUNCTIONALITY



BATTERY & ELECTRICAL SYSTEM DIAGNOSTICS FASTER VEHICLE ID: AUTOVIN & VINSCAN

- 5.5" Touchscreen / Android 9.0 / Wi-Fi Software Updates
- Test 6 & 12 Volt Batteries: 100 3000 CCA
- Test 12 & 24 Volt Cranking / Charging Systems
- Battery Specific System & Location Confirmation
- Test Battery / Charging System for Proper Function
- Electrical System Reset



















Battery Chargers & Testers

12V 10A PROSERIES RAPID CHARGER

ASCOT NO. MFG. NO. DESCRIPTION

341-00117 DSR117 12V 10A ProSeries Rapid Charger

6V/12V 125A PROSERIES BATTERY CHARGER/ENGINE STARTER

ASCOT NO. MFG. NO. DESCRIPTION

341-00118 DSR118

6V/12V 125A ProSeries Battery Charger/Engine Starter

PROSERIES 12V 2200 PEAK AMP JUMP STARTER WITH USB AND DC POWER

ASCOT NO. MFG. NO. DESCRIPTION

341-00114 DSR114

ProSeries 12V 2200 Peak Amp Jump Starter with USB and DC Power

PROSERIES 1800 PEAK AMP JUMP STARTER

ASCOT NO. MFG. NO. DESCRIPTION

341-00119 DSR119 ProSeries 1800 Peak Amp Jump Starter

12V 250A PROSERIES BATTERY CHARGER/ENGINE STARTER

ASCOT NO. MFG. NO. DESCRIPTION

341-00121 DSR121 12V 250A ProSeries Battery Charger/Engine Starter

6/12V 275A PROSERIES BATTERY CHARGER/ENGINE STARTER

ASCOT NO. MFG. NO. DESCRIPTION

341-00122 DSR122

6/12V 275A ProSeries Battery

Charger/Engine Starter

6/2/40/20/250/125A 12/24V AUTOMATIC BATTERY CHARGER/ENGINE STARTER

ASCOT NO. MFG. NO. DESCRIPTION

341-01352

SC1352

6/2/40/20/250/125A 12/24V Automatic Battery Charger/Engine Starter





Lubricants & Sealants

B'LASTER PENETRATING LITHIUM GREASE

- · High-quality lithium grease
- Time-release penetrating action
- Superior lubrication & protection
- QUANTITY: 6 per case

ASCOT NO. MFG. NO. 328-00008 GR-8A-PB DESCRIPTION B'laster

Penetrating Lithium Grease, 8 oz.



328-00008

B'LASTER PENETRATING GREASE

• High-quality synthetic grease • Time-release penetrating action • Superior anti-seize properties • Superior grease fitting lubrication & protection • QUANTITY: 10 per case

ASCOT NO MFG NO 328-00314 GR-14C-PB

DESCRIPTION B'laster Penetrating Grease, 14 oz.



328-00314

B'LASTER MAX HD GREASE

• Excellent high-temp lubrication • Superior corrosion protection • Does not drip in severe conditions • Protects up to high temperatures of 550°F (dropping point) • QUANTITY: 10 per case



ASCOT NO 328-00014

MFG. NO.

DESCRIPTION

GR-14C-HDG

B'laster Max HD Grease, 14 oz.



328-00014

B'LASTER ALL-PURPOSE LUBRICANT

- Teflon™ fluoropolymer reduces friction & wear • Protect surfaces
- Over 1000 indoor & outdoor applications • Enhance performance
- Light vanilla scent Use on all moving parts • QUANTITY: 12 per case

ASCOT NO. 328-00050

MFG. NO. PB-50

DESCRIPTION B'laster All-Purpose

Lubricant, 8 oz.



328-00050

B'LASTER SILICONE LUBE

 Teflon[™] fluoropolymer enhances performance • Long-lasting lubrication • Won't accumulate dust & dirt • QUANTITY: 12 per case



ASCOT NO. 328-00016

MFG. NO. 16-SL

DESCRIPTION B'laster Silicone Lube, 11 oz.



B'LASTER EXTRA TACKY RED GREASE

• Maximum anti-wear & extreme pressure protection • Resists thinning in high temps (550°F dropping point) • Protects against rust & corrosion • QUANTITY: 10 per case




ASCOT NO. 328-00114

MFG. NO. GR-14C-HTR DESCRIPTION B'laster Extra Tacky Red Grease, 14 oz.



328-00114



BUYER'S GUIDE ASCOT SUPPLY CORPORATION





B'LASTER DRY LUBRICANT

 Teflon™ fluoropolymer helps reduce friction & wear • Enhance performance • Protect surfaces

• QUANTITY: 12 per case

MFG. NO. DESCRIPTION ASCOT NO. 328-00116 16-TDL B'laster Dry Lubricant, 9.3 oz.





B'LASTER PRO GRADE MULTI-PURPOSE GREASE

- Superior general purpose lubrication
- · Protects against rust & corrosion
- · Excellent water resistance
- QUANTITY: 10 per case

ASCOT NO. MFG. NO. DESCRIPTION 328-00214 GR-14C-B'laster Pro Grade Multi-Purpose

Grease, 14 oz.

B'laster Parts Wash Solvent, 1-Gallon

B'laster Parts Wash

Solvent, 5-Gallon Pail

(4 per case)





B'LASTER PARTS WASH SOLVENT

- · Cuts through cutting oil. motor oils & grease • HIGH FLASHPOINT FORMULA: 145°F
- Leaves parts residue free
- · Safe for use on all metals, most plastics & painted surfaces



1	REE
ASCOT NO.	MFG. NO.

393-00128 128-PWS

393-00005 5-PWS



393-00128

B'LASTER CITRUS DEGREASER

- Fast-acting formula rinses clean with water
- Safely cleans stainless steel Spray on & wipe off tough grease • QUANTITY: 12 per case



ASCOT NO. 395-00016

MFG. NO. 16-CBD

DESCRIPTION B'laster Citrus Degreaser, 11 oz.



B'LASTER GARAGE DOOR LUBE

 Teflon™ fluoropolymer reduces friction & wear • Won't accumulate dust & dirt • Quiets noisy operation • QUANTITY: 12 per case



ASCOT NO. MFG. NO. 395-00116

DESCRIPTION B'laster Garage 16-GDL Door Lube, 9.3 oz.



395-00116

B'LASTER WHITE LITHIUM GREASE

- Keep surfaces lubricated in extreme temperatures
- Protects against moisture & oxidation Leaves a thick layer of grease • QUANTITY: 12 per case



ASCOT NO. MFG. NO. 395-00216

16-LG

DESCRIPTION B'laster White Lithium Grease, 11 oz.




395-00216



Exhaust Hoses & Tailpipe Adapters

CRUSHPROOF EXHAUST VENTILATION SYSTEM

DOOR PORTS





391-00240 391-00230





91-21040 391-20040



391-00430 391-0033



391-22040



ASCOT NO.	MFG. NO.	DESCRIPTION
391-00125	DF25	2-1/2" Rubber Door Port
391-00130	ADF30	3" Aluminum Door Port
391-00140	ADF40	4" Aluminum Door Port
391-00225	RY25	2-1/2" Rubber Y-Connector
391-00230	RY30	3" Rubber Y-Connector
391-00240	AY40	4" Aluminum Y-Connector
391-20030	AC30	3" Aluminum Splice Connector
391-20040	AC40	4" Aluminum Splice Connector
391-20050	AC50	5" Aluminum Splice Connector
391-20060	AC60	6" Aluminum Splice Connector
391-21025	SP25	2-1/2" Rubber Splice Connector
391-21030	SP30	3" Rubber Splice Connector
391-21040	SP40	4" Rubber Splice Connector
391-00325	AEL25	2-1/2" Aluminum Elbow
391-00330	AEL30	3" Aluminum Elbow
391-00340	AEL40	4" Aluminum Elbow
391-00350	AEL50	5" Aluminum Elbow
391-00425	EB25	2-1/2" Rubber Elbow
391-00430	EB30	3" Rubber Elbow
391-22150	OC50D	5" Overhead Duct Connector W/Damper
391-22160	AC-60-0C	6" Overhead Duct Connector
391-22030	OC30	3" Overhead Duct Connector
391-22040	OC40	4" Overhead Duct Connector
391-22050	OC50	5" Overhead Duct Connector
391-52500	YA250	2-1/2" Y-Assembly
391-53000	YA300	3" Y-Assembly
391-54000	YA400	4" Y-Assembly

FLARELOK® HOSES

• For use with cars and small trucks • Flared end on each length to permit connection of two or more lengths of same size hose



ASCOT NO.	MFG. NO.	DESCRIPTION
391-15250	FLT250	2-1/2" x 11' Flarelok® Hose
391-15300	FLT300	3" x 11' Flarelok® Hose
391-15350	FLT350	3-1/2" x 11' Flarelok® Hose
391-15400	FLT400	4" x 11' Flarelok® Hose

TAILPIPE ADAPTERS

• Crushproof offers a complete line of accessory items



ASCOT NO. MFG. NO. DESCRIPTION TAILPIPE STYLE SIZE	HOSE ID
391-93000 TPA3000 Split Adapter Separated Up To 2-1/2"	3"
391-90250 F250 Straight W/ Single Up To 2" Hook & Chain	2-1/2", 3", 3-1/2"
391-90300 F300 Straight w/ Single Up To Hook & Chain 2-1/2"	2-1/2",3", 3-1/2"
391-90350 F350 Straight w/ Single Up To 3" Hook & Chain	2-1/2", 3", 3-1/2"
391-90400 F400 Straight w/ Single Up To Hook & Chain 3-12/"	3-1/2", 4", 5
391-90600 DSR600 Stack Adapter Diesel Up To Stack 5-1/2"	4", 5"
391-90606 DSR600-6 Stack Adapter Diesel Up To Stack 5-1/2"	5", 6"
391-91000 UNA1000 Narrow Dual 2.5" 2.5"	3"
391-90475 F475 Oval Adapter Twin Oval 2", 5-1/2" (2.5" x 6")	3", 4"
391-90575 F575 Oval Adapter Twin Oval 2", 5-1/2" (3.5" x 8.5")	3", 4"
391-91250 RA250 Bell w/Snaps All All	3"
391-91300 RA300 Bell w/Snaps All All	3"



Bench Grinders & Shop Vises



INDUSTRIAL BENCH GRINDERS

- UL listed motor Pre-lubricated and enclosed ball bearings Cast iron wheel guards and dust vents • One piece quick adjusting spark guards • Large eye shields with quick adjustment
- Adjustable tool rests Heavy duty guarded toggle switch on 8" and 10" Fine and coarse vitrified wheels included • Rubber mounts prevent movement • 3-conductor cord with 3-prong plug



6" SWIVEL BASE BENCH VISE

• Heavy duty 30,000 PSI castings for long life and added strength • Swivel bar rotates 360° and has double lockdowns ensuring maximum stability • Powder coat paint resists scratches and provides a tough durable finish • Replaceable hardened steel top and pipe jaws



DESCRIPTION

JBG-10A: Bench Grinder, 10" Wheel

JPS-2: Optional Pedestal



311-77172



UL LISTED MOTOR



311-21500



BENCH GRINDER MODELS AT A GLANCE

ASCOT NO.

311-77101

311-77102

311-77103

311-77172

MFG. NO.

577101

577102

577103

577172

Model No.	JBG-6A	JBG-8A	JBG-10A
ASCOT. No.	311-77101	311-77102	311-77103
Shaft Diameter (In.)	1/2	5/8	1
Wheel Diameter (Dia. x W/ In.)	6 x 3/4	8 x 1	10 x 1
Wheel Speed (RPM)	3450	3450	1725
Wheel Grits	36/60	36/60	24/46
Motor (HP)	1/2HP, 115V, 1Ph	1HP, 115V, 1Ph	1-1/2HP, 115V, 1Ph
Overall Dimensions (LxWxH/ In.)	18 x 10-1/2 x 8-1/2	19 x 12-1/2 x 10	24-1/2 x 12-1/4 x 13
Net Weight (Lb.)	38	60	110





ASCOT NO.	MFG. NO.		THROAT DEPTH	PIPE CAP.	WT.
311-21500	21500	6"	4-1/8"	1/4 - 3-1/2	69.35 lb



Bench Grinders & Shop Vises (cont.)

Ken-Tool®

PROFESSIONAL SHOP VISES

• Cast iron jaw with heavy internal ribs for added strength. Pipe jaws are permanently cast in for greater channel strength • Cast iron back jaw designed for exceptional alignment with the front jaw • "V" notched, replaceable/reversible jaws made of carbon steel and heat treated for extra strength • Specially designed spring loaded handle and screw guarantees quick jaw response • Front jaw beam covers and protects screws • Steel handle balls forged from handle stock • Lifetime Casting Warranty







ASCOT NO.	MFG. NO.	JAW WIDTH	JAW OPENING	THROAT DEPTH	PIPE CAP.	WEIGHT	
311-64055	64055	5-1/2"	6-1/2"	3-3/16"	1/8"	30 lb.	
311-64065	64065	6-1/2"	7-1/2"	3-3/4"	1/8"-2-1/2"	41 lb.	
311-64650	64650	6-1/2"	7"-10"	3-3/16"	1/8"-2-1/2"	50 lb.	
311-64800	64800	8"	8"-11"	3-3/4"	1/8"-3"	74 lb.	



TRADESMAN VISES

• Fully sealed one-piece spindle nut assembly for a lifetime of smooth operation • Precision machined slide bar to eliminate movement in front jaw regardless of opened position

 • 60,000 PSI ductile iron body, jaw & base • Machined steel serrated jaws with black phosphate coating for increased durability and corrosion resistance • Lifetime Warranty



311-28806

ASCOT NO.	MFG. NO.	JAW WIDTH	OPENING CAPACITY MAX.	THROAT DEPTH	PIPE JAW CAPACITY	WEIGHT
311-28805	28805	4-1/2"	3-1/2"	3-1/2"	1/4" - 3-1/2"	42 lb.
311-28806	28806	5-1/2"	5"	3-5/8"	3/8" - 3-1/2"	42 lb.
311-28807	28807	6-1/2"	6"	4-1/4"	3/8" - 4"	42 lb.
311-28808	28808	8"	6-3/4"	5"	3/8" - 4-1/2"	111 lb.

MECHANICS PRO VISES

• Enclosed Spindle for smooth operation • Precision machined slide bar to eliminate movement in front jaw regardless of opened position • Needle roller thrust bearing to easily apply and release clamping force

• 60,000 PSI Jaw and Base • Lifetime Warranty



311-28811





ASCOT NO.	MFG. NO.	JAW WIDTH	OPENING CAPACITY MAX.	THROAT DEPTH	PIPE JAW CAPACITY	WEIGHT
311-28810	28810	4-1/2"	4"	3-1/2"	1/4" - 3"	31 lb.
311-28811	28811	5-1/2"	5"	3-5/8"	1/4" - 3"	38 lb.
311-28812	28812	6-1/2"	6"	4-3/8"	1/4" - 4"	56 lb.
311-28813	28813	8"	8-1/2"	4-1/2"	1/2" - 4"	83 lb.
311-28814	28814	10"	12"	5-1/4"	1/2" - 5"	115 lb.



Pliers & Screwdrivers

CHAN NEL LOCK

CHANNELLOCK PLIERS

- 100% MADE IN USA
- LASER heat-treated cutting edges perform better and last longer

• FORGED high carbon U.S. steel for maximum strength and



ASCOT NO.	MFG. NO.	DESCRIPTION
319-00337	337	7" High Leverage Diagonal Cutting Plier
319-00357	357	7" End Cutting Plier
319-00358	358	8" End Cutting Plier
319-00436	436	6" Diagonal Cutting Plier, Box Joint
319-00526	526	6" Slip Joint Plier, Wire Cutting Shear



8-PIECE PROFESSIONAL SCREWDRIVER SET

• Includes 5 flat tip drivers and 3 Phillips tip drivers: SLOTTED: 3/8" x 8", 5/16" x 6", 1/4" x 4", 3/16" x 3", 1/4" x 1-1/2" PHILLIPS: #2 Phillips x 4", #1 Phillips x 3", #2 Phillips x 1-1/2" • Black handles

• Hardened chrome vanadium shafts • Vapor blasted magnetic tips • Packaged in molded plastic tray for storage • Hex bolsters for extra turning power



ASCOT NO. MFG. NO. DESCRIPTION 319-19800 19800 8-Piece Professional Screwdriver Set

1/4" SOCKET DRIVER • Shank made from chrome vanadium • Overall Length: 6" • Shank Length: 2-1/2" • Ideal for use with the TPMS 11mm x 12mm flip socket • Screwdriver handle, made from durable plastic-like material • MADE IN THE USA ASCOT NO. MFG. NO. DESCRIPTION 319-72521 7252100 1/4" Socket Driver with Screwdriver Handle





Shop Cleaners & Brushes



FLOOR SQUEEGEES

• Black neoprene rubber blade designed for rough, heavy use • Handle not included, order separately



PLASTIC HANDLED BRASS SIDEWALL BRUSH

• Densely packed brass bristles • Great for cleaning white sidewall tires • BRISTLE LENGTH: 3/4" • OVERALL LENGTH: 8-1/4" • Plastic handle fits comfortably in the hand



PALMYRA FILL GARAGE BRUSHES/BROOMS

44020

395-44020

• Excellent for heavy duty sweeping of concrete, sidewalks and garage floors • Can be used for wet or dry sweeping



ASCOT NO. MFG. NO. DESCRIPTION

395-42023 | 42023 | 24" Garage Brush-Palmyra



ASCOT NO. MFG. NO. DESCRIPTION

395-13124 VT-932 Plastic Handled Brass Sidewall Brush

WOODEN HANDLED WIRE BRUSH WITH METAL SCRAPER

• Cleans rust from rims and wheels • 19 rows of steel bristles • Slightly curved wooden handle • Metal scraper included • BRISTLE LENGTH: 1" • OVERALL LENGTH: 14-1/4"



· Powerful cleaning

• Moisturizing • Great for hands and surfaces

• Water saving • 336 wipes per box

ASCOT NO. MFG. NO. DESCRIPTION
395-83039 G083039 Premium Hand Wipes

535-00150

CLEANS
RUST FROM
RIMS &
WHEELS

ASCOT NO. MFG. NO. DESCRIPTION

335-00150 VT-931 Wooden Handled Wire Brush with Metal Scraper

ASFOT SUPPLY CORPORATION

FULL BORE HAND CLEANER

- Rids hands of dirt and grease while leaving the skin soft and chap free • Solvent free
- Economical Contains skin moisturizers
- Clean fragrance Never irritates or burns open wounds • Rinses clean • Keeps your sink clean
- Keeps your pipes clean Will not separate during hot months • Long shelf life • Neutral pH
- MEETS AMERICAN CLEAN WATERS ACT





ASCOT NO.	MFG. NO.	DESCRIPTION				
ULTRA FLOW						
395-00101	TS1GAL	Ultra Flow, 1 Gallon				
395-00102	TS1GAL-FT	Ultra Flow, 1 Gallon Flat Top				
395-00103	TS1GAL-160Z	Ultra Flow, 16 oz. **				
Į	JLTRA FLOW D	ISPENSERS				
395-00104	Plastic Pump	Plastic Pump				
395-00300	TS300-D	Stainless Steel Screw On Dispenser **				
395-00125	TS125-D	Stainless Steel Wall Mount Dispenser				
395-00126	TS125-FT-D	Stainless Steel Wall Mount Dispenser (Fits Flat Top)				
	SUPER (RIT				
395-40000	TS4000	Super Grit, 4 Gallon **				
395-06400	TS6400	Super Grit, 64 oz.				
	EXTREME (GREEN				
395-00400	MG-HS-4GAL	Extreme Green, 4 Gallon **				
395-06401	MG-HS-640Z	Extreme Green, 64 oz.				







395-06400

395-06401



Shop Lights

COB RECHARGEABLE WORK LIGHT W/ USB CABLE

- 400LM brightness Dimming Switch
- Features a hook on lamp head and base with magnet for hands-free operation
- WORKING TIME: Approx. 2.5 hrs. CHARGING TIME: Approx. 4 hrs. 8W COB LED



HEAD LIGHT WITH RECHARGEABLE BATTERY

• Hands-free, versatile and comfortable with adjustable straps • MATERIAL: Aluminum +ABS+PC • LED: 1-piece high power CREE T6 bulb • BRIGHTNESS: Approx. 500LM for high mode • 4-MODE LED LAMPS: High - Low - Strobe - off • WORKING TIME: Approx. 6 hours on High; Approx. 12 hours on Low • CHARGING TIME: Approx. 5 hours • RECHARGEABLE BATTERIES: 2x 3.7V 1800mAh Li-ion batteries (3600mAh total battery capacity)

• Sensor Function • USB cable included

RECHARGEABLE WATERPROOF WORK LIGHT

• Best in the industry, Ascot Supply Corporation's Rechargeable Waterproof Work Light is the brightest rechargeable work light available with its powerful 66 LED's (460 lumens) • Swivel hook for hanging • Universal attachment hook can be used as a light stand or attached under a car hood • Rechargeable battery • Replacement 12 V lighter adapter is also available and sold separately





ASCOT NO. MFG. NO. 312-03007 TWL3007E

DESCRIPTION

COB Rechargeable Work
Light w/ USB Cable

ASCOT NO. 312-03120

MFG. NO. DESCRIPTION

THL2019 CREE Head Light with Rechargeable Battery

ASCOT NO.	MFG. NO.	DESCRIPTION
312-05224	CED5224A-AS	Rechargeable Waterproof Work Light
312-15224	CED522P3-AS	Replacement AC Adapter for Rechargeable Waterproof Work Light
312-25224	CED5224P1-AS	12V Lighter Adapter for Rechargeable Work Light



Service Stickers

STATIC CLING PRINTER



ASCOT NO. MFG. NO. DESCRIPTION 399-11111 FK-GX001-05 Static Cling Printer

STATIC CLING REMINDER STICKERS

• Excellent item to promote repeat business • Keeps your name, the service to be done and the time to do it in constant view of the customer • More effective than a door jam sticker • Static cling vinyl will cling to almost any smooth surface • No adhesive residue and they can be removed for cleaning and replacing • Silk screen printing process for a high quality image and a writing strip that won't allow the ink to fade • Generic design stickers as well as personalized stickers



	QUENTY
	OR WRITE NAME HERE
NEXT S	ERVICE DUE
DATE	
MILES	
39	99-00102



399-00103

399-11111

ASCOT NO.	DESCRIPTION
399-00101	Air Pressure/Tire Rotation Static Cling Sticker
399-00102	Oil Change Static Cling Sticker
399-00103	Service Reminder Static Cling Sticker



Tire Displays, Racks & Carts



WALL MOUNT TIRE RACK

• Designed and tested to meet your toughest standards • 500 lb./227 kg of tire and wheel assemblies kept off the floor to let you do the jobs that matter • Long heavy-duty steel tubes of 83"/2108 mm to hold 8 SUV tire and wheel assemblies (8 x 245 tread) • DIMENSIONS: 81-9/16" X 23-7/8" X 25-7/8" • MAX TIRE SIZE: 865 mm / 34" OD) • TIRE CAPACITY: 8 to 9 • LOAD CAPACITY: 500 lb./224 kg • WEIGHT: 42 lb.



ASCOT NO. MFG. NO. DIMENSIONS CAPACITY 8-9 Tires 81-9/16" x 23-7/8" x 25-7/8" MWM-80 751-00080

DELUXE TIRE DISPLAY ON CASTERS

- · Provides an excellent compromise between strength and lightness
- Equipped with casters that let you move it quickly and easily
- · Allows you to store 16 tires with an outside diameter of up to 32"



ASCOT NO. 751-00072 MTD-72

MFG. NO.

CAPACITY 14-16 Tires

751-00072

DIMENSIONS

77" x 26-1/2" x 89"

STANDARD TIRE DISPLAY ON CASTERS

• The standard tire display is 60" long and holds up to 14 tires, 7 on each of 2 tiers • This model is used a great deal by Goodyear and Michelin • With 2 wheels and 2 steel feet. moving this rack requires the display truck. The truck acts as a lever, facilitating handling in snow, on gravel surfaces and on inclines

751-00060



ASCOT NO. MFG. NO. CAPACITY DIMENSIONS MTD-60 10-14 Tires 64-1/2" x 26-1/2" x 76-1/2" 751-00060



DOLLY FOR TIRE DISPLAYS

• Required to handle tire display units • Only one is necessary even if you have several display units • Compatible with all other makes of display units



ASCOT NO. 751-00172

MFG. NO. MD

DESCRIPTION



Dolly for Tire Displays

751-00172



• Easy to maneuver, even with a full load of tires • Can handle tires up to 35" in diameter • Features a gas spring that automatically closes the arms and grips the tires • All you have to do is to push down on the pedal, slide the cart under the stack of tires and release the pedal. The frame lines up the tire on its own • Allows you to move tires 12 to 35 inches in size



703-00810

SMART TIRE CART

• Works on passenger 15" tires up to truck size 245/70R19.5 tires • Moves mounted tires and wheel sets • Moves tires in stacks of 8 to 10 high • Stacks tires closer together than other carts which creates more storage space • No foot pedals • Great for loading and unloading trucks and containers • Patented tilting action relieves stress off the user • New push/pull system pushes the tires out of the SMART Cart arms without stress • Fewer moving parts • Easy to assemble • "Patent Pending"





ASCOT NO. MFG NO CAPACITY 703-47147 G471147HD

8 to 10 tires

DIMENSIONS Handles sizes from 15" to truck size 245/70R19.5

703-47147



Includes (4) swivel, non-marking and smooth 3" casters, (1) equipped with brake • 300 lb. capacity • Ideal for moving tires around or for tire storage • Unique built-in compartment stackable design for space saving storage • SIZE: 25.2" x 25.2" x 4.33"



TIRE CART REPLACEMENT TIRES/WHEELS

inner & outer wheel bearings • Compatible with Martins tire carts

Sold as a pair of two • Flat-free foam design • SIZE: 10" x 3-1/2" • Industrial



THIRT HILL

ASCOT NO. 703-00818

MFG. NO.

DESCRIPTION

PU1005ASC | Tire Cart Replacement Tires/Wheels



ASCOT NO. 703-00509

MFG. NO. TC0509

DESCRIPTION Tire Dolly w/ Casters





399-98313

399-99302

Interior Protection Products



The Slip-N-Grip® protection system provides total protection for the customer's car while being serviced:

· Covers hold fast to the upholstery: A patented process laminates two distinctly different plastics together - the top layer allows a person to easily slide into and out of the vehicle and the bottom, or gripping layer, keeps the seat cover in place

399-99323

· Unique process eliminates static electric clinging and wrinkling.

A complete line of vehicle interior protection products are available along with a service center roll dispenser.

PARTS RETURN BAG

· Heavy plastic bag for holding old removed parts you've replaced · Keeps customer's vehicle and hands clean

ASCOT NO. MFG. NO. DESCRIPTION 399-60098 FB-P9943-56 14" x 22" Parts Return Bag

PAPER KEY TAG

• Cost-effective, convenient solution for key control • Metal ring

ASCOT NO. MFG. NO. DESCRIPTION QUANTITY Paper Key Tag with Metal Rings 1.5" x 2.75" 1,000/box 399-98313

PLASTIC KEY TAG

- Self-locking design holds keys secure Large writing surface; holes are fully punched out eliminating "chads"
- Perfect for quickly tagging keys in a busy service area

DESCRIPTION QUANTITY ASCOT NO. MFG. NO. 399-99323 FB-P9933-23 White Plastic Key Tag - 4.5" x .75" 1000/package

WORK TICKET HOLDER

· Heavy-duty sewn nylon fabric handle ensures durability even in harsh conditions · Durable brass grommet increases strength

ASCOT NO. MEG NO DESCRIPTION SI7F CHANTITY 399-99302 FB-P9933-02 Work Ticket Holder 10.5" x 14.5" 25/box

PLASTIC FLOOR MAT

• Slip-N-Grip" two-layer construction ensures mat stays in place • Impervious to water, oil, grease and most shop chemicals

ASCOT NO. DESCRIPTION QUANTITY MFG NO 399-99432 FG-P9943-02 Plastic Floor Mat 500/roll

GENERIC ADHESIVE TIRE LABEL

• Features sure-grip adhesive • Proper used tire labeling sells tires

ASCOT NO. MFG. NO. DESCRIPTION QUANTITY 399-99479 FB-P9943-79 Generic Adhesive Tire Label - 3" x 6" 500/roll





399-99432

399-99479



399-99429

399-99415



PLASTIC TIRE BAG

• 40% post-consumer recycled resin • White film hides dirty tire • Ideal for returning old tires or snow tires for storage

ASCOT NO.	MFG. NO.	DESCRIPTION	SIZE	QUANTITY
399-99391	FG-P9933-91	Extra Large Tire Bag	47" x 48" x 1.25 Mil	125/roll
399-99429	FG-P9943-29	Standard Tire Bag	36" x 40"	250/roll
399-99392	FG-P9933-92	Large Tire Bag	39" x 44"	250/roll

PLASTIC SEAT COVER

• Slip-N-Grip' seat covers have two distinct layers: the bottom layer grips the seat to stay in place and the top layer is smooth to allow easy entry and exit from the vehicle • Protects bucket, bench and split seats

ASCOT NO.	MFG. NO.	DESCRIPTION	QUANTITY
399-99415	FG-P9943-15	Plastic Seat Cover	500/roll

STEERING WHEEL COVER

• Keeps grease, dirt and other shop chemicals off • Made of clear polyethylene with stretch elastic grip feature • Unique double-band steering wheel covers stays in place while allowing access to airbags

STANDARD SIZE: Covers virtually all passenger cars and light trucks.

ASCOT NO.	MFG. NO.	DESCRIPTION	QUANTITY
399-99433	FB-P9943-33	Double Band Steering Wheel Cover (Standard Size)	500/box
399-99435	FB-P9943-35	Double Band Steering Wheel Cover (For Trucks)	250/box

FLOOR-RACK START-UP KIT

• Promotes your professional image by displaying your complete line of car interior protection products where your customers can see you putting them in their car • Convenient roll dispenser work station provides organized storage, helps save employee time and shows your customers you care about their car

ASCOT NO.	MFG. NO.	DESCRIPTION
399-60000	FK-P9943-76	Product Dispenser System (Includes Product)

FLOOR DISPENSER RACK

- Industry-leading dispenser system keeps products organized and within reach
- Presents "We Care" image and promotes cleanliness Retention straps prevent free-rolling and locking casters keep dispenser in place • Top tray holds paper floor mats and other service items while lower tray provides extra storage

ASCOT NO.	MFG. NO.	DESCRIPTION
399-98893	FB-P9833-89	Floor Dispenser Rack



399-99433



PREMIUM INTERIOR PROTECTION

Interior Protection Products (cont.)



PERSONALIZED PAPER FLOOR MATS

• Either insert your logo where the footprints are or totally design a new layout • The stock is a high bulk 60 pound white sheet, size 17" x 22", with a one color imprint • Minimum order of 3,000 • Camera ready art must be supplied for all logos - one time artwork charge

ASCOT NO. DESCRIPTION

399-00005 Personalized Paper Floor Mats

PRIME HEAVY DUTY PAPER FLOOR MATS

• Treated/coated mats, made from premium prime/virgin paper • Keeps dirt, grease, oil, spills, leaks and other shop fluids out of your customer's vehicle during service • Prime paper is suitable for all weather climates and heavy foot traffic • Prime paper directly from paper mill provides same consistent quality every time • Printed with UV ink • Bright white paper produces vibrant, full color prints • Recyclable • SIZE: 17" x 19" • QUANTITY: 500 per box

ASCOT NO. MFG. NO. DESCRIPTION

399-74980 M3273PP2280A Prime Heavy Duty Paper Floor Mats - 17" x 19"

PLASTIC ARROW KEY TAG

• Unique one piece key tag that attaches easily to the key ring with a hole for hanging on a board • Packaged 40 perforated sheets with 25 tags each • 1000 per pack

ASCOT NO. DESCRIPTION
399-00011 Plastic Arrow Key Tag

TIRE LABELS

• 2-1/2" x 6" label for easy identification of new, used and retreaded tires • Packed 500 per roll

ASCOT NO. MFG. NO. DESCRIPTION

601-00101 TL-101 Tire Labels New-Used-Retread

399-00005





399-74980





601-00101



Stud Guns & Studding Equipment



UGIGRIP®, SELF-ADJUSTING CARBIDE TIRE STUD

· Delivers full-time traction, increases the safety, convenience and security • To order studs to best fit your customers' tire, use the TSMI number recommended by the tire manufacturer



SINGLE FLANGE STUDS:

TSMI Size	11	12	13	15	169	17	19
Overall Length	.345"	.375"	.470"	.520"	.585"	.515"	.635"
Jacket Dia.	.197"	.197"	.197"	.197"	.197"	.197"	.250"
Bottom Dia.	.354"	354"	354"	354"	354"	354"	354"
Nearest 32" to Hole Depth	11/32"	12/32"	13/32"	15/32"	16/32"	17/32"	19/32"

STUDDING EQUIPMENT

· Lightweight, reduces road wear · Steel 12SL, 13SL & 16SL meet requirements for Washington, Oregon & Idaho

ASCOT NO.	STUDDING GUN	USE WITH STUDS NUMBERED
458-00010	10G	TSMI-11-12-13-15-16-17
458-00011	10T	TSMI-19-21

PARTS BREAKDOWN STUD GUN PARTS (AS-9 MODEL) PART NO. DESCRIPTION 0084 External Finger 0087 0-Ring 8800 0089 0-Ring 0090 0-Ring 0091 0-Ring STUD FEEDER PARTS (KFP2 MODEL) 0092 Piston Cup 0095 Trigger Spring PART NO. DESCRIPTION 0096 Trigger Pin 0169 Deflector Spring 0098 Trigger 0099 Trigger Sleeve 0172 Snap Ring 0173 Screw 0126 Pressing Spring Internal Finger 0174 Washer 0175 Clamp 0128 Handle Body 0180 Drive Shaft Pin 0129 Piston 0130 Feed Tube 0428 Washer Tapered Sleeve 0519 Feed Wheel 0131 0132 Head (Steel) 0520 Base Plate 0133 Ring Nut 0521 Retaining Ring 0134 Compression Spring 0522 Feed Tube

STUD GUN REPAIR & CONVERSION KITS

0135 Ring

0136 0383 | Piston Cup

0-Ring

ASCOT NO.	STUDDING GUN	USE WITH STUDS NUMBERED
458-03810	0381	Tire Stud Mini Repair Kit. INCLUDES: (3) 0084 External Fingers; (1) 0087 O-ring; (1) 0088 O-ring; (3) 0126 Pressing Springs
458-03820	0382	Tire Stud Gun Large Repair Kit. INCLUDES: (6) 0126 Pressing Spring; (3) 0084 External Fingers; (2) 0087 O-ring; (2) 0088 O-ring; (1) 0092 Piston Cup; (1) 0136 O-ring
458-00911	00911	Conversion Kit. Converts AS-9 Gun to AS-11 Truck Model. INCLUDES: (1) 0401 Truck Feed Tube; (1) 0400 Truck Stud Gun Head; (3) 0127 Truck Stud Gun Internal Finger

0523

0524

Screw

Shaft

0525 Hex Bolt





329-08878

329-08874

Drains & Pumps

18-GALLON POLYETHYLENE WASTE OIL DRAIN

- 18 gallon capacity
- · Plastic drain container
- Comes with 16.5" funnel
- Extends from 40" to 73"
- Metal trolley comes with 4 casters and pull handle for safe and easier movement around the shop
- Oil can be drained either by pour gravity, integrated drain valve or using integrated bung hole rotary barrel pump (not included)
- · SHIP WEIGHT: 24 lbs.

ASCOT NO. MFG. NO. DESCRIPTION

329-08874 8874 18-Gal Polyethylene Waste Oil Drain

18-GALLON LOW PROFILE WASTE OIL DRAIN

- Low profile drain height of 7.75"
- Large 18 gallon baffled tank reduces "slosh" during transport
- Large metal screen provides extra draining area and keeps out debris
- Convenient rotary hand pump for fast evacuation
- Long steel handle provides easy mobility to drain area
- · SHIP WEIGHT: 47 lbs.

ASCOT NO. MFG. NO. DESCRIPTION

329-08878 18-Gal Low Profile Waste Oil Drain

24-GALLON WASTE OIL DRAIN

- Large 24 gallon steel recovery tank with 6' drain hose
- Tank-mounted oil-level sight gauge and convenient tool tray
- Standard 15-3/4" drain funnel and wide 24" funnel adapter (shown) with drain tube that extends from 54" to 79"
- · Pressure regulator
- · Heavy duty wheels and casters
- SHIP WEIGHT: 82 lbs.

ASCOT NO. MFG. NO.

329-08890 8890 24-Gal Waste Oil Drain with Pressurized Evacuation

24-GALLON WASTE OIL DRAIN WITH PROBE KIT

- 18 gallon suction capacity
- 100 PSI shop air connected to vacuum gauge quickly creates suction
- Large 16" collection funnel (4-7/8 gallon capacity)
- Suction extraction at 1/2 gallon per minute
- 78" suction and drain hoses • Pressurized evacuation of tank makes emptying easy
- 70.8" maximum height
- Six flexible evacuation probes and VW, Mercedes and BMW adapters
- Two air ports: 1 for pressure, 1 for vacuum
- · SHIP WEIGHT: 93 lbs.

ASCOT NO. MFG. NO.

329-08895 24-Gal Waste Oil Drain/Evacuator with Probe Kit









ROLLING FLOOR TRUCK DRAIN

• Comes pre-assembled allowing for immediate use • Can be used for used motor oil or Antifreeze; decals provided for fluid identification • FEATURES: Two fixed wheels and 1 swivel caster, double baffles with upper screen and side splash lip • 3/4" or 1" Coupler kit sold separately



LOW PROFILE TRUCK OIL DRAIN WITH LID

• Holds 60 quarts • Equipped with 4 rollers and a handle for transport and positioning under trucks • Cover and curved side design help keep fluids from spilling during movement • Convenient handles and pour spout facilitate fluid evacuation • Rolls under most cab over axles so oil can be changed without jacks or jack stands • OVERALL HEIGHT: 7-1/2", WIDTH: 32-1/4", LENGTH: 49"





ASCOT NO.	MFG. NO.	CAPACITY	DESCRIPTION
322-41203	4120-003	5.2-Gallon	Truck Drain for Antifreeze
322-41467	4140-067	_	Cam-Lock Coupler, Adapter and Valve Kit (3/4") for 4120-003 drain
322-41206	4120-006	26-Gallon	Truck Drain for Motor Oil
322-41461	4140-061	_	Cam-Lock Coupler, Adapter and Valve Kit (1")for 4120-003 drain



322-19202

ASCOT NO.	MFG. NO.	DESCRIPTION
322-19202	19202	Low Profile Truck Oil Drain with Lic

TRUCK & TRAILER WHEEL PAN

- Prevents oil mess during wheel repair The pan fits rims with 13 3/4" ID and larger • Handle compartments hold hub nuts out of the oil • Made of polypropylene for durability
- Will not warp if oil is warm CAPACITY: 88 ounces



ASCOT NO.	MFG. NO.	DESCRIPTION

329-19852 19852 Truck & Trailer Wheel Pan



Drains & Pumps (cont.)

TRANSMISSION DRAIN FUNNEL

• 22" by 23" heavy duty plastic lift drain funnel • Extends the catch area of any lift drain • Funnel catches any loose parts • Prevents parts from falling through drain



ASCOT NO.

MFG. NO.

DESCRIPTION

322-17892 17892

Transmission Drain Funnel



DUNK TANKS

• Heavy duty plastic tire and tube test tank • Features pyramid type ribs for extra support to prevent bowing • Handles passenger tire sizes to wide oval and light duty truck tires



322-02444

ASCOT NO.	MFG. NO.	DESCRIPTION
322-19822	2400-10	Passenger Car
322-02444	2400-44	SUV/Light Truck

MULTI-DRAIN TUB

• 30-quart, all purpose, heavy duty, plastic drain tub

• For draining radiator, crankcase, transmission differential • Accommodate autos and trucks • Apron for washing and sorting parts



322-17922

ASCOT NO. 322-17922

MFG. NO.

DESCRIPTION Multi-Drain Tub

4.5-GALLON OVAL DRAIN PAN

• New, smooth pan design is easy to wipe out and clean • 6.25" pan height to fit tight spaces • 1.125" outer diameter spout for quick and easy pouring of used fluids into most jugs • Anti-splash lip helps prevent spills when carrying or pouring • Multiple hand positions for carrying • Made of high density polyethylene material that is resistant to chemicals and solvents





ASCOT NO.	MFG. NO.	DESCRIPTION
322-17972	17972	Black Drain Pan (For Oil)
322-17982	17982	Green Drain Pan (For Coolant)



SINGLE WALL UL-142 CUBE LUBE TANK



ASCOT NO.	MFG. NO.	DIMENSIONS (H X W X D)	THICKNESS	APPROX. WEIGHT
322-00125	DW125	38"x32"x26"	12 Gauge	170 lb.
322-00200	DW200	36"x60"x22"	12 Gauge	220 lb.
322-00201	DW200V	60"x36"x22"	12 Gauge	220 lb.
322-00250	DW250	34"x60"x28"	12 Gauge	290 lb.
322-00251	DW250V	60"x34"x28"	12 Gauge	290 lb.
322-00300	DW300	38"x60"x31"	12 Gauge	325 lb.
322-00301	DW300V	60"x38"x31"	12 Gauge	325 lb.
322-00350	DW350V	60"x41"x31"	12 Gauge	350 lb.
322-00500	DW500	60"x60"x33"	12 Gauge	450 lb.
322-00650	DW650	60"x78"x33"	10 Gauge	730 lb.
322-00750	DW750	60"x90"x33"	10 Gauge	820 lb.
322-01000	DW1000	60"x118"x33"	10 Gauge	1,025 lb.



8-GALLON OIL LIFT DRAIN

• This specially shaped, translucent jug holds 8 gallons • Reinforced base will not warp with hot oil • Has a wide working range from 36 1/2" to 74" • Its lower center of gravity increases stability and four 2 1/2" ball bearing wheels swivel and roll easily • Also has a heavyduty adjustment clamp, large handle and big pour spout with threaded cap • Large 15" funnel has strainer built-in to catch drain plugs • Base of funnel is 13/4" wide

ASCOT NO. 322-11102

MFG. NO. 11102

DESCRIPTION 8-Gallon Oil Lift Drain





18-GALLON OIL LIFT DRAIN

• Translucent jug holds 18 gallons and will not warp with hot oil . Rolls easily with four heavy-duty 2 1/2" wheels • Metal tubes extend working area from 36-1/2" to 77"

• Drains from the bottom with a brass drain valve • Large 15" funnel has a built in strainer to catch drain plugs

ASCOT NO. MFG. NO. 322-17432 17432

DESCRIPTION 18-Gallon Oil Lift Drain





18-GALLON OIL LIFT DRAIN

• 18-gallon capacity • Four 3-1/2" ball bearing wheels • 3/4" evacuation valve

• Spout for evacuation • Hand grips on bottom and top • Height adjusts from 48" to 71" • Polyethylene body is translucent for easy viewing of oil level • Oil Drain Pump not included






(todd)

8-GALLON OIL LIFT DRAIN

• 8-gallon capacity • Spout for evacuation

• Hand grips on bottom and top for ease in evacuation • Four 3-1/2" ball bearing wheels • Height adjusts from 48" to 71" • Polyethylene body is translucent for easy viewing of oil level







BOSCH

Fluid Exchange

COOL-TECH 34288NI RECOVERY/ **RECYCLING SYSTEM**

· AUTOMATIC OIL DRAIN: Automatically drains oil recovered during the recovery operation and puts the oil in a graduated container showing the user how much needs to be injected back into the system • AUTOMATIC AIR PURGE: Eliminates damaging air without monitoring gauges or opening valves • PROGRAMMABLE VACUUM FUNCTION: Defaults to 15 mins, programmable up to 99 mins. "Remaining time" is displayed • OPTIONAL REFRIGERANT & OIL DATABASE: A/C system capacities for North American market vehicles (Not included with the machine)



PREMIUM 34988NI A/C RECOVER. RECYCLE AND RECHARGE MACHINE

• Fully automatic recovery, vacuum leak test and recharge - no monitoring required • Patented automatic refrigerant refill prevents machine from emptying supply tank • Only machine with fully automatic oil injection • Two oil inject bottles for different oils to work on more vehicles with less down time • Large easy-to-read color display and printer standard • UV dye injection capability for leak detection • Automatic air purge eliminates system-damaging air



ASCOT NO.	MFG. NO.	DESCRIPTION	SHIPPING WT.
361-34988	34988NI	Recovery/Recycling System	232 lb.

ASCOT NO.	MFG. NO.	DESCRIPTION	DIMENSIONS	SHIPPING WT
361-34288	34288NI	Recovery/ Recycling System	50" H x 34" W	225 lb.

COOL-TECH 34788NI RECOVERY/ **RECYCLING SYSTEM**

• Fully automatic operation • 98.5% recovery • R134a • IMPROVED CHARGE PERFORMANCE: Exceeds SAE requirements • Graphical display • EXPANDABLE: Capable of additional feature and function add-ons (printer, wireless, refrigerant ID) • Automatic Internal tank fill





PREMIER R-1234YF RECOVER, RECYCLE AND RECHARGE MACHINE • 98.5% recovery efficiency • Charge accuracy

within +/- ½ oz. • FULLY AUTOMATIC OPERATION: Program for service, walk away and return when complete · Automatic internal tank refill. No stopping to fill the internal tank during service, or before service • Automatic oil drain shows how much oil was removed from the system during service • Integrated refrigerant identifier • Programmable vacuum operation helps get to the necessary vacuum

level in any condition quickly • System leak test to identify gross leaks in a system • 5 × 9 cm (4.3-in. diag) Color graphical display • Exceeds SAE J2843 requirement for R-1234YF Recover, Recycle and Recharge equipment



ASCOT NO.	MFG. NO.	DESCRIPTION	SHIPPING WT.
361-34788	34788NI	Recovery/Recycling System	235 lb.
361-34789	34788NI-H	Hybrid Recovery/Recycling System	222 lb.

ASCOT NO. MFG. NO. 361-11234 AC1234-4

DESCRIPTION Premier R-1234yf Recover, Recycle and Recharge Machine SHIPPING WT. 206 lb.





The FX Series is the new Gold Standard in Refrigerant Management. Quickly and efficiently recover, recycle, and recharge automotive A/C systems with the FX Series of Refrigerant Management Centers. FEATURES: 7" Color touch screen control panel, patented motor-controlled ball valves, patented oil-less compressor, 1-2-5 Warranty (1 year - Labor / 2 years - Parts / 5 years - Compressor), 30 lb. recovery tank, 6 CFM vacuum pump, Hybrid compatible, Thermal printer standard on all models

*Setup and training are provided at no additional charge.

FX134A REFRIGERANT MANAGEMENT SYSTEM

· Certified to meet SAE J2788H for use in R134A systems

FX1234 REFRIGERANT MANAGEMENT SYSTEM

- · Certified to meet SAE J2843 for use in R1234yf systems
- · Includes a Refrigerant Identifier

FX3030 DUAL REFRIGERANT MANAGEMENT SYSTEM

- · Certified to meet SAE J3030 for use in R134a and R1234yf systems
- Includes a Refrigerant Identifier
- **DUAL UNIT HANDLING BOTH REFRIGERANTS**



361-00134 FX134A

ASCOT NO.

MFG. NO. DESCRIPTION

FX134A Refrigerant Management System ASCOT NO. 361-01234

MFG. NO. FX1234

DESCRIPTION FX1234 Refrigerant Management System ASCOT NO. 361-03030

MFG. NO. FX3030

DESCRIPTION FX3030 Refrigerant Management System



Oil Accessories



RADIATOR FILLERS



329-00505

8-QT. OIL DISPENSER WITH LID & CAP

- 8-Quart Dispenser with a spout cap and lid to keep out dirt, dust and other contaminants Many large SUVs and trucks now require more oil works great to transport bulk oil Translucent white polyethylene material enables the user to read the oil level on the container up to 8 quarts and is marked in both quarts and liters
- Flexible, removable 8" pouring spout enables easy transfer of liquid



ASCOT NO.	MFG. NO.	DESCRIPTION
329-19702	19702	8-Quart Oil Dispenser with Lid & Cap

ASCOT NO. MFG. NO. DESCRIPTION CAPACITY 329-00505 | 6110-010 | Black Plastic Radiator Filler | 12 Quarts



WATER/ANTI-FREEZE BIBB

• Durable, full volume dispense nozzle for water, windshield wash and antifreeze • 1/4" NPT female inlet



ASCOT NO.	MFG. NO.	DESCRIPTION
329-18685	3340-014	Water/Anti-Freeze Bib





SLIP JOINT HANDLE OIL FILTER PLIERS

• Two-position, slip-joint handle produces the range of three separate conventional filter wrenches • Overall range 2 1/4" to 4" • Jaws are bent at a 20-degree angle to fit more applications • Sure grip teeth prevent slipping • Cushioned handles provide comfort • OVERALL LENGTH: 11-1/2"




ASCOT NO. MFG. NO. DESCRIPTION

329-50750 50750 Slip Joint Handle Oil Filter Pliers

SWIVEL GRIP OIL FILTER WRENCHES

• Handle swivels to clear obstructions • Features the swivel handle, gripper "teeth" and 1" wide stainless steel band • The swivel handle makes it easy to turn filters in hard to reach locations • Vinyl covered handle

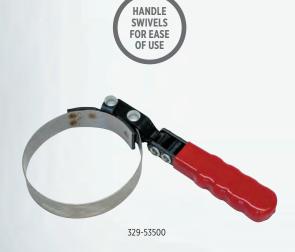

ASCOT NO.	MFG. NO.	DESCRIPTION
329-53500	53500	Standard Swivel Grip Oil Filter Wrench: 3.5" - 3.875" Range
329-53700	53700	Small Swivel Grip Oil Filter Wrench: 2.875" - 3.25" Range

HEAVY DUTY END CAP **OIL FILTER WRENCHES**

End cap filter wrenches have been improved by adding welds to hold a steel disc to the top of the wrench.

• Cup design allows easy filter removal and installation from the end of the filter, even in the tightest locations • End cap filter wrenches fit the most popular domestic and import vehicles • 14 flutes • Use with 3/8 in. square drive



• Welded steel disc on top for extra strength • Heat treated steel • 3/8" drive



329-61570



ASCOT NO.	MFG. NO.	DESCRIPTION
329-61570	61570	Heavy Duty End Cap Oil Filter Wrench: 76 mm - 14 Flutes
329-61600	61600	Heavy Duty End Cap Oil Filter Wrench: 65 mm - 14 Flutes

IMPORT CAR OIL FILTER WRENCH

• Fits filters from 2 1/2" to 3 1/8" • Removes all oil filters from 2 1/2" to 3 1/8" in diameter • This extra large range enables the 63600 wrench to fit most all import car filters plus the common 3" domestic car filters • Steel jaws grip filter without slipping • Works in tight spots from the front of the filter using 3/8" drive





ASCOT NO.	MFG. NO.	DESCRIPTION
329-63600	63600	Import Car Oil Filter Wrench



SureWerx*

Safety Products

FACE SHIELDS

ASCOT NO.	MFG. NO.	DESCRIPTION
396-14955	14955	170-SB Crown and Window Kit
396-14200	14200	MAXVIEW™ Premium Face Shield - Clear Window
396-21000	21000	GPL500 Premium Goggle with Flip-Up Detachable Shield - Clear Lens, Anti-Fog

SAFETY GLASSES

- Lightweight, stylish, comfortable and very affordable High impact optically correct wrap style unitary PC lens offers superior coverage Soft, flexible temple tips & soft nose piece offers all day comfort Temples are curved inwards to ensure comfortable, slip-resistant fit Temple tips are curved outwards for gentle placement and removal
- Meets ANSI Z87.1-2015 and tested to U.S. Military Standard MIL-PRF-31013
- Available in clear/black, amber/black and smoke/black styles

ASCOT NO.	MFG. NO.	DESCRIPTION
396-73601	S73601	Sellstrom XM330 Safety Glasses - Clear/Black
396-73611	S73611	Sellstrom XM330 Safety Glasses - Amber/Black
396-73621	S73621	Sellstrom XM330 Safety Glasses - Smoke/Black

HEARING PROTECTION

ASCOT NO.	MFG. NO.	DESCRIPTION	FEATURES
396-20773	20773	Jackson H70 Vibe Earmuffs - Orange	Highly padded ear cups for all day comfort, Dielectric, durable thermoplastic material retains shape and pressure, Great for environments such as lawn mowers, industrial work, traffic noise, etc.
396-23412	S23412	Sellstrom Disposable Ear Plugs - FOAM Bullet Shape, Corded, Hi-Viz Green (100 pairs per box)	Gently but quickly expand to fit ear canal, Soft non- irritating PU foam for max comfort, Independently tested/certified to NRR 32 (ANSI S3.19). CSA Class AL.
396-23421	S23421	Sellstrom Reusable Ear Plugs - Tapered, Corded, Blue/Hi-Viz Green (100 pairs per box)	Ensure optimum ear canal coverage, Firm push/pull post for easy insertion/ removal, Reusable - Can be washed and reused, Non- allergenic polymer materials
396-23430	S23430	Sellstrom Banded Ear Plugs - Tapered, Hi-Viz Green (1 per bag)	Wear around the neck when not in use, Regular and intermittent applications - Easily removed, Band shape curves at the plug end to keep pods up and clean when not in use







TEAR AWAY MESH SAFETY VESTS

· Meets visibility standards and requirements for medium risk traffic control and public safety workers, including school crossing guards, survey crews and more • COOLING COMFORT - Polyester mesh is breathable, durable and keeps you cool on the job • HI-VIS - Includes StarTech reflective tape for excellent visibility • Features 5 point tear-away

and D-ring access slot



396-30551

ASCOT NO.	MFG. NO.	DESCRIPTION
396-30551	V1030550U-S/M	Safety Vest - Hi-Vis Orange, Size S/M
396-30552	V1030550U-L/XL	Safety Vest - Hi-Vis Orange, Size L/XL
396-30553	V1030550U-2/3XL	Safety Vest - Hi-Vis Orange, Size 2XL/3XL
396-30554	V1030550U-4/5XL	Safety Vest - Hi-Vis Orange, Size 4XL/5XL
396-30561	V1030560U-S/M	Safety Vest - Hi-Vis Yel/Green, Size S/M
396-30562	V1030560U-L/XL	Safety Vest - Hi-Vis Yel/Green, Size L/XL
396-30563	V1030560U-2/3XL	Safety Vest - Hi-Vis Yel/Green, Size 2XL/3XL
396-30564	V1030560U-4/5XL	Safety Vest - Hi-Vis Yel/Green, Size 4XL/5XL

EYE WASH STATIONS

- The ideal first response solution when continuous water supply is unavailable
- Quickly flushes contaminants from eyes using a sterile, buffered & preserved solution • Can be wall-mounted or placed on flat surfaces • Highly visible green backboard • Available in 6 gallon personal station or 32 oz. bottle station



ASCOT NO.	MFG. NO.	DESCRIPTION
396-90306	S90306	Sellstrom 6-Gallon Gravit-Eye Portable Eyewash Station
396-90333	S90333	Sellstrom 32 oz. Double Rapid-Clear Eyewash Bottle Station

KNEE PADS - ULTRA FLEX III

 Articulating hinge ensures proper placement all day • Soft elastic and wide straps are well placed and above the knee - No velcro • Strong & flexible plastic outer shells • Pads offer 5/8" closed cell foam pad, Sweat will not penetrate • Built for years of hard work and heavy use



ASCOT	NO.
700 00	110

MFG. NO.

DESCRIPTION

396-96110

S96110

KneePro Ultra Flex III Knee Pads - Grey/Orange



DOT CONSPICUITY TAPE

• Meets all Federal and State certifications • Micro prismatic technology • Thin and flexible • 10-year durability

396-62150	

ASCOT NO.	MFG. NO.	DESCRIPTION
396-62150	CT6R6W2150	2" x 150' (6" Red, 6" Silver)
396-72182	CT11R7W2X18	2" x 18" Strip (11" Red, 7" Silver)
396-72150	CT11R7W2150	2" x 150' (11" Red, 7" Silver)
396-82150	CTR2150	2" x 150' Solid Red
396-92150	CTW 2150	2" x 150' Solid Silver
396-93150	CTY2150	2" x 150' Solid Yellow
396-82150 396-92150	CTR2150 CTW 2150	2" x 150' Solid Red 2" x 150' Solid Silver





Wheel Chocks

RUBBER WHEEL CHOCK

• Durable rubber construction • Features an eye bolt for chain or rope attachment • Ribbed pyramid design • Either side of wheel chock can be positioned against the tire • Sold individually • WEIGHT: 10 lb. (4.5kg)



ASCOT NO. MFG. NO. DESCRIPTION
396-15300 | 15300 | Rubber Wheel Chock

OTR WHEEL CHOCK

• DIMENSIONS: 12" x 10" x 12" • Designed for heavy duty truck and mining equipment • 20" rope attached for convenience • NET WEIGHT: 27.5 lb.



ASCOT NO. MFG. NO. DESCRIPTION
396-00102 | TS102 | OTR Wheel Chock

URETHANE WHEEL CHOCKS

• SOLID LIGHTWEIGHT CONSTRUCTION • High impact urethane material • Non-conductive, no threat to puncture the tire • Durable, lightweight and easy to use • Extensively field tested



ASCOT NO.	MFG. NO.	TIRE SIZE	DIMENSIONS (LXWXH)	WEIGHT
396-15336	15336	35" to 55" (90 cm to 140 cm)	13.3" x 8.6" x 7.8" (34 cm x 22 cm x 20 cm)	7.7 lb. (3.5 kg)
396-15337	15337	47" to 86" (120 cm to 220 cm)	18" x 12" x 9" (47.5 cm x 30.5 cm x 22.5 cm)	13 lb. (6 kg)
396-15338	15338	70" to 118" (180 cm to 300 cm)	22.5" x 13" x 14" (57 cm x 34 cm x 35.5 cm)	19.8 lb. (9 kg)
396-15339	15339	110" to 165" (280 cm to 420 cm)	26.7" x 13" x 14" (68 cm x 33.7 cm x 35.5 cm)	30.86 lb. (14 kg)
396-15342	15342	86" to 137.8" (220 cm to 350 cm)	24" x 13.5" x 12" (62.1 cm x 34.3 cm x 32.3 cm)	24.3 lb. (11 kg)
396-15353	15353	47" to 70" (120 cm to 180 cm)	13.38" x 9.84" x 7.8" (34 cm x 25 cm x 22.5 cm)	13.66 lb. (6.2 kg)



Gloves





ASCOT NO.	MFG. NO.	DESCRIPTION
396-00301	32806BK240R2	Micro Diamond Black Nitrile Glove (Small)
396-00302	32806BK240R3	Micro Diamond Black Nitrile Glove (Medium)
396-00303	32806BK240R4	Micro Diamond Black Nitrile Glove (Large)
396-00304	32806BK240R5	Micro Diamond Black Nitrile Glove (XL)
396-00305	32806BK240R6	Micro Diamond Black Nitrile Glove (XXL)
396-00401	328060R240R2	Micro Diamond Orange Nitrile Glove (Small)
396-00402	328060R240R3	Micro Diamond Orange Nitrile Glove (Medium)
396-00403	328060R240R4	Micro Diamond Orange Nitrile Glove (Large)
396-00404	328060R240R5	Micro Diamond Orange Nitrile Glove (XL)
396-00405	328060R240R6	Micro Diamond Orange Nitrile Glove (XXL)

RPG

396-00804

396-00805

RPG MECHANIC'S GLOVES

BLK-XL

BLK-XXL

• Black synthetic leather palm with small patches • Features blue spandex on back, neoprene on knuckle, 4cm wide elastic, hook & loop

Black Nitrile Gloves (XL)

Black Nitrile Gloves (XXL)



ASCOT NO. DESCRIPTION 396-10011 RPG Mechanic's Gloves

HIGH VISIBILITY MECHANICS GLOVES

• Grey synthetic leather with silicon printing on palm • High visibility Spandex back with back of the hand protection • Impact protection • Hook and loop • One size fits most



ASCOT NO.	MFG. NO.	DESCRIPTION
396-14201	FGM-420	Green/Black Mechanics Gloves - Pair
396-14202	FOM-420	Orange/Black Mechanics Gloves - Pair

Gloves (cont.)



WORK GLOVES

Gaither's Work Gloves are designed to provide the best possible protection while still delivering the grip and flexibility required for performing intricate and complex tasks.

• Perfect for tire maintenance and general shop use • Machine washable • Impact protection • Double Stitched • Industrial grade hook and loop • Slip-free silicone grip

ASCOT NO.	MFG. NO.	DESCRIPTION
396-49101	G49110S	Small Work Gloves
396-49102	G49110M	Medium Work Gloves
396-49103	G49110L	Large Work Gloves
396-49104	G49110XI	Xtra Large Work Gloves

COLORED LEATHER DOUBLE PALM WORK GLOVES

• Split leather double palm • Colored fabric on the back of the hand • Half fleece lining • 12 pairs per package



ASCOT NO.	MFG. NO.	DESCRIPTION
396-55221	AB-R	Red Leather Double Palm Work Gloves
396-55222	AB-G	Green Leather Double Palm Work Gloves





396	_55	22	^

ASCOT NO.	DESCRIPTION 396-55220
396-06780	Wet Grip Neoprene Glove. Protects Against Acids, Caustics, Oils, Greases And Many Solvents. 5-Piece Flannel Liner
396-40317	Power Grip with Latex Premium Grip
396-55220	Leather Palm Glove with Safety Cuff, Flastic

HIGH VISIBILITY DUAL COLOR LEATHER **DOUBLE PALM GLOVES**

• Split leather double palm • High visibility green and orange colors • Half fleece lining • 12 pairs per package



ASCOT NO.	MFG. NO.
	1

396-55223 AB-HVDC

DESCRIPTION

High Visibility Dual Color Leather Double Palm Gloves

Cements, Sealants & Patches

Air Buffers & Drills

Tire Repair Tools & Accessories

Tire Spreaders & Repair Stations

Cabinets & Storage

REPAIR MATERIALS



Cements, Sealants & Patches

RADIAL RX REINFORCED PATCHES

- · Specially designed for small nail hole repair on radial passenger, performance, light truck and truck tires
- Perfect for tread area and sidewall repair



ASCOT NO.	MFG. NO.	DESCRIPTION	SIZE (IN.)	QTY./ UNIT
571-00010	RAD-0	Reinforced Nail Hole Patch	1-9/16" x 1-9/16"	10
571-00011	RAD-1N	Reinforced Nail Hole Patch	2-3/4" x 2"	20

SECTION REPAIR ID PATCHES

· Universally accepted method for marking section repairs on radial truck tires • Blue triangle identification patches are a must for any dealer, retreader or fleet performing sidewall, shoulder or tread area section repairs



ASCOT NO.	MFG. NO.	DESCRIPTION	QTY./UNIT
569-00090	90	Section ID Patches	50
569-00091	90B	Section ID Patches	1000

RAD-100 SERIES RADIAL REPAIR UNIT

• REMA TIP TOP offers a variety of radial-ply repair units to meet the diverse demands of today's passenger, truck, and OTR tire applications • Due to our fully-integrated blue bonding layer and center over injury design, REMA TIP TOP Radial-Ply repair units are suitable for use with all current vulcanizing systems • For best results, always select the corresponding REMA TIP TOP Stem insert unit, carbide cutter and Special Cement BL (non flammable) or Special Blue Cement (flammable) product for a permanent, reliable repair



ASCOT NO.	MFG. NO.	DESCRIPTION	PLIES	SIZE (IN.)	QTY./ UNIT
575-00110	RAD-110	Radial repair unit	1	2 x 2-3/4	20
575-00115	RAD-115	Radial repair unit	1	3-1/2 x 3	20
575-00116	RAD-116	Radial repair unit	1	2-5/8 x 4	10
576-00120	RAD-120	Radial repair unit	2	4-7/8 x 3	10
576-00122	RAD-122	Radial repair unit	2	6-7/8 x 3	10
576-00124	RAD-124	Radial repair unit	2	8-1/2 x 3	10
576-00125	RAD-125	Radial repair unit	3	4-1/2 x 4-7/8	10
576-00128	RAD-128	Radial repair unit	3	2-7/8 x 13-1/8	10
576-00135	RAD-135	Radial repair unit	4	5-7/8 x 8	10
576-00140	RAD-140	Radial repair unit	3	7-7/8 x 3-15/16	10
576-00142	RAD-142	Radial repair unit	4	10-1/4 x 5	10
576-00144	RAD-144	Radial repair unit	4	13 x 5	10
577-00146	RAD-146	Radial repair unit	4	7-1/4 x 17-1/4	5
577-00150	RAD-150	Radial repair unit	5	23 x 7-1⁄8	5
577-00152	RAD-152	Radial repair unit	5	23 x 9-1/2	3
577-00155	RAD-155	Radial repair unit	5	10-1/4 x 13-1/8	5
577-00156	RAD-156	Radial repair unit	7	29 x 10-1⁄2	3
577-00160	RAD-160	Radial repair unit	7	40 x 10-1/4	3
577-00162	RAD-162	Radial repair unit	7	13 x 41-1/4	1
577-00165	RAD-165	Radial repair unit	6	13-1⁄8 x 16-3⁄4	3
577-00168	RAD-168	Radial repair unit	7	14 x 30-3/8	1
577-00175	RAD-175	Radial repair unit	8	18 x 21-3/4	3
577-00180	RAD-180	Radial repair unit	2	7-3/4 x 6	5
577-00182	RAD-182	Radial repair unit	3	10 x 7-1⁄2	5
577-00184	RAD-184	Radial repair unit	3	11-1⁄2 x 8-1⁄2	5
577-00185	RAD-185+	Radial repair unit	8	28-3/4 x 20-7/8	1
577-00186	RAD-186	Radial repair unit	2	13-1⁄2 x 9-3⁄4	5
577-00188	RAD-188	Radial repair unit	2	18 x 11-1/4	5
577-00190	RAD-190	Radial repair unit	2	22 x 15-3/8	3




EASIER

APPLICATION



RADIAL TIRE REPAIR UNITS (ARAMID)

- Today's varied tire designs, unique wheel applications and demanding driving conditions require a broad range of tire repair products. REMA TIP TOP's ARAMID repair units are lightweight, provide optimal flexibility and will prove to be the most reliable truck repair units you have ever handled • For best results, always select the corresponding REMA TIP TOP Stem insert unit, carbide cutter & Special Blue Cement (flammable) for a permanent, reliable repair
- Precise contour suits critical positions in low-profile tires High strength ARAMID belts do not elongate, thus reducing repair bulge

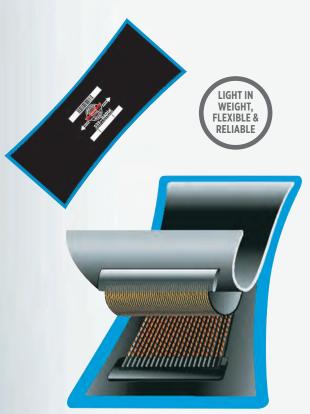


Magnified view of the 576-00535

ASCOT NO.	MFG. NO.	DESCRIPTION	SIZE (IN.)	QTY./UNIT
576-00531	RAD-531 Aramid	Radial Repair Unit for Low Profile Tires	3-7/16 x 6-1/2	10
576-00533	RAD-533 Aramid	Radial Repair Unit for Low Profile Tires	4-3/8 x 8	10
576-00535	RAD-535 Aramid	Radial Repair Unit for Low Profile Tires	4-3/8 x 10	10
576-00537	RAD-537 Aramid	Radial Repair Unit for Low Profile Tires	4-3/8 x 11-1/4	10
576-00539	RAD-539 Aramid	Radial Repair Unit for Low Profile Tires	4-1/2 x 12-3/4	10

RAD 500 ARAMID REPAIR UNITS FOR AGRICULTURAL TIRES

- Easier application due to an increased flexibility Less heat generation • Optimized weight, therefore less influence on the tires balance and a better rolling behavior
- Better dynamic behavior which avoids tensions between tire and patch • Repair material for the new generation of Agricultural tires (high speed, low pressure)
- Can be used in a Chemical or Heat Cure environment

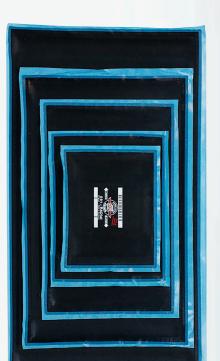

	TY./ INIT
t for 168	5
t for 203	5
t for 233	5
t for 288	5
t for 343	3
lit lit lit	REPAIR R





Cements, Sealants & Patches (cont.)

REMA RED EDGE TUBE PATCHES

• Feature double-scalloped feathered edges to ensure perfect bonding and complete vulcanization • A unique rubber compound allows the patch to stretch evenly and equally in all directions • Use vulcanizing fluid 203 or 204







ASCOT NO.	MFG. NO.	DESCRIPTION	UNITS/BOX
541-00400	0	1-1/4" Round Tube	100
541-00410	1	1-1/2" Round Tube	30
541-00420	2	1-3/4" Round Tube	30
541-00430	3	2" Round Tube	30
541-00440	4	3" Round Tube	30
541-00450	5	3-3/4" Round Tube	10
541-00460	6	4" Round Tube	10
541-00470	7	3" x 1-1/2" Oval Tube	30
541-00472	7B	6" x 2" Oval Tube	10

REMA STEM INSERTS AND ACCESSORIES

• REMA TIP TOP's pre-cured, self-vulcanizing inserts are specially contoured for easy installation • For best results always select the corresponding REMA TIP TOP repair unit, carbide cutter and Special Blue Cement (flammable) for a permanent, reliable repair







ASCOT NO.	MFG. NO.	DESCRIPTION	INJURY (IN.)	QTY./UNIT	
582-19621	193-WL-10	REMA STEM 6 (Wire Lead)	max 1/4	10	
582-19820	RS-8	REMA STEM 8	max 5/16	60	
582-19420	RS-10	REMA STEM 10	max 3/8	20	
582-19430	RS-12	REMA STEM 12	max 1/2	20	
582-19311	193-WL-50	REMA STEM 6 (Wire Lead)	max 1/4	50	
582-19410	194	REMA STEM 8 (RS-8)	max 5/16	10	
468-01120	VT-1120L	Insertion Pulling Wires (626)			





REMA MINICOMBI REPAIR UNITS & ACCESSORIES

- REMA TIP TOP's most popular unit for crown repair of passenger/ light truck tires • Our MINICOMBI's are available in a wide range of sizes and establish new standards in one-piece repair technology
- For best results always use with REMA TIP TOP carbide cutters and Special Blue Cement (flammable) for a permanent, reliable repair • Improved Blue coating enhances the bonding process



ASCOT NO.	MFG. NO.	DESCRIPTION	UNITS/ BOX
537-00190	190	Awl for Remastem & Minicombi Repairs	_
537-00199	199	Rasp for Remastem & Minicombi Repairs	_
581-67050	A3	1/8" Minicombi	50
581-67010	A3-R	1/8" Minicombi	10
581-67045	A4.5	3/16" Minicombi	40
581-67340	A6	1/4" Minicombi	40
581-67308	A6-R	1/4" Minicombi	8
581-68008	B8-MC	5/16" Minicombi	20
581-68020	B8-MC-R	5/16" Minicombi	8
581-68418	B10	3/8" Minicombi	20
581-68406	B10-R	3/8" Minicombi	6

UNIVERSAL PATCH

- REMA TIP TOP's rubber-reinforced, universal repair units are specially formulated to provide maximum flexibility and strength • These non-directional, center over injury repair units perform flawlessly in both radial or bias-ply tire designs
- For best results, always select the corresponding REMA TIP TOP Stem insert unit, carbide cutter and Special Blue Cement (flammable) product for a permanent, reliable repair











550-26714





550-26745

ASCOT NO.	MFG. NO.	SIZE	QTY.
550-26707	UP-3	1/8"	100
550-26714	UP-4.5P	3/16"	300 in Pail
550-26721	UP-6	1/4"	50
550-26738	UP-6P	1/4"	200 in Pail
550-26745	UP-8	5/16"	50
550-26752	UP-8P	5/16"	150 in Pail



Cements, Sealants & Patches (cont.)

AGRICULTURAL AND OTR TIRES/ PN SERIES BIAS-PLY REPAIR UNITS

• 90° cord angle of the plies provides greater compatibility with the flexing action of the tire as it operates under load, plus it also makes the patch more flexible for easier installation • A new concept in rubber compounding of the ply-end cover strip eliminates cord breakout at the end of the plies • Two different ply levels for each size patch provide better compatibility of the repair unit to the ply rating of the tire • Flexibility in patch/injury size optimization for improved performance • Eliminates need for "S" (Sidewall) patches in the smaller sizes • Reduced buffing requirement due to the smaller size of the patch • Use Blue Bonding cement



ASCOT NO.	MFG. NO.	SIZE (IN.)	SIZE (MM)	# PLIES	QTY./ BOX
568-05000	PN-50	9-1/2"	240mm	4	3
568-05010	PN-050+	9-1/2"	240mm	6	3
568-05200	PN-052	14"	360mm	6	3
568-05210	PN-052+	14"	360mm	8	3
568-05400	PN-054	19"	480mm	8	2
568-05410	PN-054+	19"	480mm	10	2
568-05600	PN-056	26"	660mm	10	2
568-05610	PN-056+	26"	660mm	12	2
567-05620	PN-056S	26"	660mm	10	2
568-05800	PN-058	32"	810mm	12	1
568-05810	PN-058+	32"	810mm	14	1
567-05820	PN-058S	32"	810mm	12	1
567-05821	PN-058S+	32"	810mm	14	1

REMA TIP TOP BIAS-PLY TIRE REPAIR UNITS

• REMA TIP TOP offers a wide selection of bias-ply (cross-ply) repair units for applications on passenger, truck, OTR, agricultural and industrial bias-ply tires • Due to our fully-integrated blue bonding layer, REMA TIP TOP bias-ply repair units are suitable for use with all current vulcanizing systems

• For best results, always select the corresponding REMA TIP TOP Stem insert unit, carbide cutter and Special

Blue Cement (flammable) for a permanent, reliable repair





ASCOT NO.	MFG. NO.	SIZE (IN.)	SIZE (MM)	# PLIES	QTY./ BOX
562-26006	PN-0	1-9/16	39.7	1	50
562-26037	PN-3	4	101.6	2	10
562-26044	PN-4	5-3/4	146	2	10
562-26051	PN-5	6-1/2	165	4	10
562-26068	PN-6	9-1/4	235	6	10
562-26075	PN-7	11-3/4	298.5	6	10
562-26082	PN-8	13-1/2	343	6	5
562-26099	PN-9	15-1/2	393	8	3
562-26109	PN-10	17-3/4	450.8	8	3
563-00200	PN-20	10	254	4	10
563-00210	PN-21	14-1/2	368.3	4	5
563-00220	PN-22	20	508	4	3
563-00230	PN-23	10	254	6	10
563-00240	PN-24	14-1/2	368.3	6	5
563-00250	PN-25	20	508	6	3
563-00400	PN-40	7	177.8	4	2
563-00410	PN-41	8-3/4	222.3	6	2
563-00420	PN-42	10-1/4	260.3	8	2
562-26212	FRU1-MP	2-1/2	63	1	25
562-26213	FRU1-P	2-1/2	63	1	100
562-26314	FRU2-MP	3-1/4	82.55	2	25
562-26315	FRU2-P	3-1/4	82.55	2	100





REMA GTR RADIAL REPAIR UNITS

- These repair units are designed for use in section repairs in RADIAL OTR TIRES • They are intended for use in heat cure systems (Autoclaves, Section Molds, Molds or Strap Type Curing Systems)
- Their "center over injury" design makes them a very convenient and easy type of repair • Used with uncured black floater gum, they provide added adhesion in all types of repairs • SHELF LIFE FOR UNCURED & HEAT CURE REPAIR UNITS: 1 Year from Date of Manufacture; Clothback REPAIR UNITS: 4 Years from Date of Manufacture





REMA GTR BASKET RADIAL REPAIR UNITS

• These repairs are designed to give the needed flexibility and extra support for shoulder and sidewall injuries of RADIAL OTR TIRES • They provide the ability to repair larger injuries than standard radial "center over the injury" repair units • SHELF LIFE FOR UNCURED & HEAT CURE REPAIR UNITS: 1 Year from Date of Manufacture; Clothback REPAIR UNITS: 4 Years from Date of Manufacture



'CENTER OVER INJURY" **DESIGN**









ASCOT NO.	MFG. NO.	DESCRIPTION	SIZE (IN.)	SIZE (MM)	# PLIES	QTY./ BOX
	GTR RA	DIAL REPAIR	UNITS - L	INCURED		
526-10046	10 046 RU	GTR - UC 46	16 x 5	405 x 125	4	5
526-10050	10 050 RU	GTR - UC 50	22 x 7.5	560 x 190	5	5
526-10052	10 052 RU	GTR - UC 52	22 x 9.5	560 x 240	6	2
526-10056	10 056 RU	GTR - UC 56	28 x 10.5	710 x 265	7	2
526-10060	10 060 RU	GTR - UC 60	38 x 10.5	965 x 265	8	2
	GTR RA	DIAL REPAIR	UNITS - H	EAT CURE		
526-12046	12 046 RH	GTR - HC 46	16 x 5	405 x 125	4	5
526-12050	12 050 RH	GTR - HC 50	22 x 7.5	560 x 190	5	5
526-12052	12 052 RH	GTR - HC 52	22 x 9.5	560 x 240	6	2
526-12056	12 056 RH	GTR - HC 56	28 x 10.5	710 x 265	7	2
526-12060	12 060 RH	GTR - HC 60	38 x 10.5	965 x 265	8	2
	GTR RAI	DIAL REPAIR	UNITS - CL	OTHBACK		
526-12146	12 046 RC	GTR - CB 46	16 x 5	405 x 125	4	5
526-12150	12 050 RC	GTR - CB 50	22 x 7.5	560 x 190	5	5
526-12152	12 052 RC	GTR - CB 52	22 x 9.5	560 x 240	6	2
526-12156	12 056 RC	GTR - CB 56	28 x 10.5	710 x 265	7	2
526-12160	12 060 RC	GTR - CB 60	38 x 10.5	965 x 265	8	2

ASCOT NO.	MFG. NO.	DESCRIPTION	SIZE (IN.)	SIZE (MM)	# PLIES	QTY./ BOX
	GTR BASKE	T RADIAL REPA	IR UNITS	- UNCURED		
525-10136	10 016 BRU	GTR-B - UC 016	16 x 5	405 x 125	5	6
525-10137	10 020 BRU	GTR-B - UC 020	20 x 9	510 x 230	5	6
525-10138	10 027 BRU	GTR-B - UC 027	27 x 10	685 x 255	2	7
525-10139	10 038 BRU	GTR-B - UC 038	38 x 10	965 x 255	2	7
	GTR BASKE	T RADIAL REPA	IR UNITS -	HEAT CUR	E	
525-11345	12 016 BRH	GTR-B - HC 016	16 x 5	405 x 125	5	6
525-11346	12 080 BRH	GTR-B - HC 020	20 x 9	510 x 230	5	6
525-11347	12 027 BRH	GTR-B - HC 027	27 x 10	685 x 255	2	7
525-11348	12 038 BRH	GTR-B - HC 038	38 x 10	965 x 255	2	7
	GTR BASKET	RADIAL REPAI	R UNITS -	CLOTHBAC	K	
525-11349	12 016 BRC	GTR-B - CB 016	16 x 5	405 x 125	5	6
525-11350	12 020 BRC	GTR-B - CB 020	20 x 9	510 x 230	5	6
525-11351	12 027 BRC	GTR-B - CB 027	27 x 10	685 x 255	2	7
525-11352	12 038 BRC	GTR-B - CB 038	38 x 10	965 x 255	2	7



Cements, Sealants & Patches (cont.)

REMA OTR BASKET BIAS REPAIR UNITS

• The OTR-B-UC unit is engineered and constructed to create maximum flexibility • The ply strips are positioned in a basket weave pattern creating the strength and flexibility needed for reinforcement or section repair • SHELF LIFE FOR UNCURED & HEAT CURE REPAIR UNITS: 1 Year from Date of Manufacture; Clothback REPAIR UNITS: 4 Years from Date of Manufacture









526-11136

	11	OTV /

ASCOT NO.	MFG. NO.	DESCRIPTION	SIZE (IN.)	SIZE (MM)	PLIES	BOX
	OTR BA	SKET BIAS REP	AIR UNITS - L	INCURED		
526-11115	10 104 BU	OTR-B - UC 04	7.5 x 7.5	190 x 190	10	4
526-11116	10 106 BU	OTR-B - UC 06	9.75 x 9.75	245 x 245	10	6
526-11117	10 108 BU	OTR-B - UC 08	12.25 x 12.25	310 x 310	10	6
526-11118	10 110 BU	OTR-B - UC 010	14.25 x 14.25	360 x 360	5	8
526-11119	10 112 BU	OTR-B - UC 012	16.25 x 16.25	410 x 410	5	8
526-11120	10 114 BU	OTR-B - UC 014	18.25 x 18.25	465 x 465	5	10
526-11121	10 116 BU	OTR-B - UC 016	20.25 x 20.25	515 x 515	2	10
526-11122	10 118 BU	OTR-B - UC 018	22.75 x 22.75	575 x 575	1	12
526-11123	10 120 BU	OTR-B - UC 020	26.75 x 26.75	680 x 680	1	14
	OTR BA	SKET BIAS REPA	AIR UNITS - H	EAT CURE		
526-11124	12 104 BH	OTR-B - HC 04	7.5 x 7.5	190 x 190	10	4
526-11125	12 106 BH	OTR-B - HC 06	9.75 x 9.75	245 x 245	10	6
526-11126	12 108 BH	OTR-B - HC 08	12.25 x 12.25	310 x 310	10	6
526-11127	12 110 BH	OTR-B - HC 010	14.25 x 14.25	360 x 360	5	8
526-11128	12 112 BH	OTR-B - HC 012	16.25 x 16.25	410 x 410	5	8
526-11129	12 114 BH	OTR-B - HC 014	18.25 x 18.25	465 x 465	5	10
526-11130	12 116 BH	OTR-B - HC 016	20.25 x 20.25	515 x 515	2	10
526-11131	12 118 BH	OTR-B - HC 018	22.75 x 22.75	575 x 575	1	12
526-11132	12 120 BH	OTR-B - HC 020	26.75 x 26.75	680 x 680	1	14
	OTR BAS	KET BIAS REPA	IR UNITS - CL	OTHBACK		
526-11133	12 104 BC	OTR-B - CB 04	7.5 x 7.5	190 x 190	10	4
526-11134	12 106 BC	OTR-B - CB 06	9.75 x 9.75	245 x 245	10	6
526-11135	12 108 BC	OTR-B - CB 08	12.25 x 12.25	310 x 310	10	6
526-11136	12 110 BC	OTR-B - CB 010	14.25 x 14.25	360 x 360	5	8
526-11137	12 112 BC	OTR-B - CB 012	16.25 x 16.25	410 x 410	5	8
526-11138	12 114 BC	OTR-B - CB 014	18.25 x 18.25	465 x 465	5	10
526-11139	12 116 BC	OTR-B - CB 016	20.25 x 20.25	515 x 515	2	10
526-11140	12 118 BC	OTR-B - CB 018	22.75 x 22.75	575 x 575	1	12
526-11141	12 120 BC	OTR-B - CB 020	26.75 x 26.75	680 x 680	1	14

COLD VULCANIZING FLUID

• Designed for the vulcanization of tube patches, valve patches and rubber-based tube valve repair units



501-00203 5
001-00203

01-00203	501-0020

ASCOT NO.	MFG. NO.	DESCRIPTION	QTY./ BOX
501-00201	201	Cold Vulcanizing Fluid 25 Gm. Tube	1
501-00202	202	Cold Vulcanizing Fluid 50 Gm. Tube w/Brush	1
501-00203	203-F	Cold Vulcanizing Fluid, Flammable, 8 Oz. Can w/ Brush	10
501-00204	204-F	Cold Vulcanizing Fluid, Flammable, 32 Oz. Can	10
501-00205	205	Cold Vulcanizing Fluid 1 Gallon	1

PRE-BUFF CLEANER

• Specially formulated to dissolve moldrelease lubricants and other contaminants creating a clean surface prior to innerliner buffing • Available in spout-top liquid or spray-top aerosol dispensers • CFC-free formula requires shorter drying times • Same formula for tube or tire preparation



505-00171

ASCOT NO.	MFG. NO.	DESCRIPTION	QTY./ BOX
505-00071	71	Pre-Buff Rubber Cleaner 1 Qt. Spout Top Can	6
505-00170	70F	Pre-Buff Cleaner (Flammable) - 16 Oz.	12
505-00171	71-F	Pre-Buff Cleaner (Flammable) - 1 Qt. Spout Top Can	6
532-06020	6020	16 Oz. Aluminum Cement Dispenser with Brush Top	1
532-06021	6021	Replacement Brush Lid for 6020 Cement Dispenser	_

REMA TIRE TALC

• Specially formulated for trouble-free tube installation, reduces folding and sticking which contributes to friction within the tire

ASCOT NO.		DESCRIPTION	QTY./BOX
507-00063	63	Rema Tire Talc, 1 Lb. Shaker Top	10








501-50300



SPECIAL CEMENT BL™

- The key to REMA TIP TOP's exclusive Blue Bonding System, Special Cement BL creates a nearly indestructible bond between tire and repair unit
- Specifically designed for the application of REMA TIP TOP Radial, Bias-Ply and Universal, Minicombi & RemaStem repair units • Use for chemical installation of REMA TIP TOP blue bonding layer repair units, Blue Floater Gum and chemical vulcanizing compounds • REMA TIP TOP's newest Special Blue Cement (flammable) is free of CFC and aromatic compounds








ASCOT NO.	MFG. NO.	DESCRIPTION	QTY./ BOX
502-40541	BL-8F	Special Blue Cement (flammable), 8 Oz. Brush Top Can	12
502-51388	BL-32F	Special Blue Cement (flammable), 32 Oz. Can	6

RIM/BEAD SEALER AND INNERLINER REPAIR SEALANT

· REMA TIP TOP offers two distinct Bead Sealer formulations designed to prevent leaks between the tire and rim • Designed to be applied to tire beads during the mounting process • Ideally suited for use with new or old tires • No drip formula is highly viscous with an extended shelf life • CFC-free formula requires shorter drying times • Properly applied, Repair Sealer creates an airtight seal around a finished repair, over buffed areas or porous tire innerliners



• No Drip Version available: ND Series



PREVENT LEAKS BETWEEN

TIRE & RIM

ASCOT NO.	MFG. NO.	DESCRIPTION	QTY./ BOX
504-09600	960F	Rim & Bead Sealer w/Brush Cap. CFC-Free Formula (Flammable) 32 Oz.	6
504-09601	960ND	Rim & Bead Sealer w/Brush Cap. No Drip Formula - 32 Oz. Can	6
505-00176	76F	Innerliner Sealer Can (Flammable) - 16 Oz.	6

A&B COMPOUND REPAIR SYSTEM (FLAMMABLE)

• REMA TIP TOP's Vulc Compound has no equal when it comes to cold vulcanization injury filling • Equal quantities of A compound and compound, thoroughly mixed, produce a durable permanent repair





ASCOT NO.	MFG. NO.	DESCRIPTION
501-50300	50F	A+B VULC COMPOUND KIT: 650g can of A compound; 650g can of B compound; 1 can Special Cement BL (CFC Free), 225g
501-51300	51F	A+B VULC COMPOUND KIT: 300g can of A compound; 300g can of B compound; 1 can Special Cement RI (CEC Free) 40g each

OTR-F CEMENT (FLAMMABLE)

501-51300

• Specifically designed for the chemical application of REMA TIP TOP Radial (RAD) and Bias Ply (PN) repair units • Optimizes the service performance of long haul earthmover and agricultural tires

ASCOT NO.	MFG. NO.	DESCRIPTION
500-00096	OTR-F	OTR-F Cement (flammable



IK-F	Cement (naminable)	500-00096



Use all tire repair chemicals in a well ventilated area. Avoid prolonged breathing or inhalation of vapors.





Cements, Sealants & Patches (cont.)

REMABOND CEMENT (FLAMMABLE)

- For Mold-Cure and Pre-Cure Retreading and Repairing
- · Specially formulated to be used in the application of Fill Rubber for buzz-outs, repair patch installation, and tire retreading operations



ASCOT NO.	MFG. NO.	DESCRIPTION
502-26005	16 RBB 5G	Remabond Brush Cement (Flammable) - 5-Gallon
502-26001	16 RBB D	Remabond Brush Cement (Flammable) - 54-Gallon
502-26015	16 RBS 5G	Remabond Spray Cement (Flammable) - 5-Gallon
502-26011	16 RBS D	Remabond Spray Cement (Flammable) - 54-Gallon

REMASOL **RUBBER SOLVENT** (FLAMMABLE)

· Best for removing contaminants from rubber surfaces and for tire injury repair preparation • Totally compatible with both **REMABOND Brush Cement** and REMABOND Spray Cement • Fast drying • Contains no carcinogens • SHELF LIFE: 1 Year from Date of Manufacture in unopened original container



ASCOT NO.	MFG. NO.	DESCRIPTION
506-26005	16 RS 5G	Remasol Rubber Solvent (Flammable) - 5-Gallon
506-26015	16 RS D	Remasol Rubber Solvent (Flammable) - 54-Gallon

REMABOND REPAIR **CEMENT (FLAMMABLE)**

• REMABOND Repair Cement is made in a convenient 1 gal. size ideal for repair stations

ASCOT NO. 500-01602

MFG. NO. 16 RBR 1G

DESCRIPTION REMABOND Repair Cement



MULTIPLE TEMPERATURE RUBBER (MTR) & BLACK CUSHION **GUM REPAIR PRODUCTS**

· REMA TIP TOP offers a variety of uncured rubber MTR products with excellent green tack and outstanding flow & vulcanization characteristics

ASCOT NO.	MFG. NO.	DESCRIPTION
526-51618	5161180	MTR Cut Resistant Rope Rubber, OTR Repairs, 26.5 Lb. Pail
526-55610	5561	MTR Cushion Gum, 24' x 10" x 0.050", 6 Lbs.
526-55630	5563	MTR Cushion Gum, 2600mm x 30mm x 3mm, 2 Lbs.
526-55672	5567-26.5	MTR Rope Rubber, OTR Repairs, 26.5 Lb. Pail

REMA CUSHION GUMS • SHELF LIFE: 1 Year from Date of

Manufacture (*except Butyl Repair Gum, SHELF LIFE: 6 Months from Date of Manufacture)



ASCOT NO.	MFG. NO.	DESC.	SIZE (W X THICKNESS) (INCH)	SIZE (W X THICKNESS) (MM)	CURE RATE	WT./ BOX (LBS.)
525-15116	15 1116 S	Stripping Stock	1 x 1/16	25 x 1.50	RTT-B	35
525-15216	15 2116 S	Stripping Stock	2 x 1/16	50 x 1.50	RTT-B	35
525-15213	15 2132 CG	Cushion Gum	2 x 1/32	50 x 0.80	RTT-B	35
525-15413	15 4132 CG	Cushion Gum	4 x 1/32	100 x 0.80	RTT-B	35
525-15181	15 18132 CG	Cushion Gum	18 x 1/32	455 x 0.80	RTT-B	10
525-15418	15 418 CG	Cushion Gum	4 x 1/8	100 x 3.00	RTT-B	35
525-15188	15 1818 CG	Cushion Gum	18 x 1/8	455 x 3.00	RTT-B	20
525-15186	15 18116 UG	Universal Gum	18 x 1/16	455 x 1.50	RTT-B	10
525-15914	15 914 UG	Universal Gum	9 x 1/4	230 x 6.00	RTT-B	40
525-15286	15 18116 BRG	Butyl Repair Gum*	18 x 1/16	455 x 1.50	RTT-C	10
525-15288	15 1818 FG	Floater Gum	18 x 1/8	455 x 3.00	RTT-B	10





REMA REPAIR CORD

• SHELF LIFE: 1 Year from Date of Manufacture

ASCOT NO.	MFG. NO.	DESC.	SIZE (W X THICKNESS) (INCH)	SIZE (W X THICKNESS) (MM)	CURE RATE	WT./ BOX (LBS.)
526-15293	15 NY 29364	Nylon Tire Cord	29 x 3/64	735 x 1.20	RTT-D	20 lbs
526-15283	15 AR 28364	Aramid Tire Cord	28 x 3/64	710 x 1.20	RTT-D	20 lbs

RTT-A	RTT-B	RTT-C	RTT-D		
CURE RATES					
10' @ 280F	20' @ 280F	20' @ 280F	30' @ 280F		
20' @ 260F	35' @ 260F	40' @ 260F	50' @ 260F		

REMA ROPE RUBBER


• SHELF LIFE (18ER & 18ERS - EXTRUDER ROPE): 4 Months from Date of Manufacture, SHELF LIFE (180R - OTR ROPE & 18TR - TREAD ROPE): 6 Months from Date of Manufacture



ASCOT NO.	MFG. NO.	DESC.	SIZE (INCH)	CURE RATE	WT./BOX (LBS.)
526-18001	18ER	Extruder Rope	3/8 Diameter	RTT-A	30
526-18002	18ERS	Extruder Rope / Spool	3/8 Diameter	RTT-A	30/Spool
526-18003	18TR	Tread Rope	3/8 Diameter	RTT-B	30

REMA PRECURE CUSHION GUM

- Undertread Bonding Gum Can also be used on splices, skives, and exposed cord
- Consistent Gauge Excellent building tack and flow • Custom sizes available upon request (20 box minimum per size/gauge)
- SHELF LIFE: 4 Months from Date of Manufacture



				ZE CKNESS)		
ASCOT NO.	MFG. NO.	DESC.	(INCH)	(MM)	CURE RATE	WT./BOX (LBS.)
523-18160	18 100060 PCC	Precure Cushion Gum	1 x 0.060	25 x 1.524	RTT-A	40
523-18146	18 114060 PCC	Precure Cushion Gum	1-1/4 x 0.060	32 x 1.524	RTT-A	50
523-18126	18 112060 PCC	Precure Cushion Gum	1-1/2 x 0.060	38 x 1.524	RTT-A	35
523-18206	18 200060 PCC	Precure Cushion Gum	2 x 0.060	50 x 1.524	RTT-A	35
523-18712	18 712060 PCC	Precure Cushion Gum	7-1/2 x 0.060	190 x 1.524	RTT-A	30
523-18758	18 758060 PCC	Precure Cushion Gum	7-5/8 x 0.060	195 x 1.524	RTT-A	30
523-18860	18 800060 PCC	Precure Cushion Gum	8 x 0.060	203 x 1.524	RTT-A	35
523-18858	18 858060 PCC	Precure Cushion Gum	8-5/8 x 0.060	220 x 1.524	RTT-A	35
523-18960	18 900060 PCC	Precure Cushion Gum	9 x 0.060	230 x 1.524	RTT-A	35
523-18914	18 914060 PCC	Precure Cushion Gum	9-1/4 x 0.060	235 x 1.524	RTT-A	40
523-18912	18 912060 PCC	Precure Cushion Gum	9-1/2 x 0.060	240 x 1.524	RTT-A	40
523-18915	18 914 045 PCC	Precure Cushion Gum	9-1/4 x 0.045	235 x 1.143	RTT-A	35
523-18856	18 858 046 PCC	Precure Cushion Gum	8-5/8 x 0.045	220 x 1.143	RTT-A	30
523-18389	18 38916055 PCC	Precure Cushion Gum	38-9/16 x 0.055	980 x 1.397	RTT-A	52
523-18212	18 02120 OTR PCC DP	OTR Precure Cushion Gum Double Poly	2 x 0.120	50 x 3.048	RTT-A	40
523-18512	18 05120 OTR PCC DP	OTR Precure Cushion Gum Double Poly	5 x 0.120	125 x 3.048	RTT-A	40
523-18101	18 10120 OTR PCC DP	OTR Precure Cushion Gum Double Poly	10 x 0.120	254 x 3.048	RTT-A	35
523-18220	18 12120 OTR PCC DP	OTR Precure Cushion Gum Double Poly	12 x 0.120	305 x 3.048	RTT-A	45
523-18412	18 14120 OTR PCC DP	OTR Precure Cushion Gum Double Poly	14 x 0.120	355 x 3.048	RTT-A	50
523-18161	18 16120 OTR PCC DP	OTR Precure Cushion Gum Double Poly	16 x 0.120	405 x 3.048	RTT-A	60
523-18222	18 22120 OTR PCC DP	OTR Precure Cushion Gum Double Poly	22 x 0.120	560 x 3.048	RTT-A	80
523-18262	18 26120 OTR PCC DP	OTR Precure Cushion Gum Double Poly	26 x 0.120	660 x 3.048	RTT-A	95
525-15288	15 1818 FG	Floater Gum	18 x 1/8	455 x 3.00	RTT-B	10



Cements, Sealants & Patches (cont.)

TIRE REPAIR CHEMICALS

- · Fast drying
- · Wide brush for easy application

ASCOT NO.	MFG. NO.	DESCRIPTION
501-90018	ASV8	Clear Chemical Vulcanizing Cement, 8 oz. (24 per case)
501-90032	ASV32	Clear Chemical Vulcanizing Cement, Quart (6 per case)
501-90008	ASV8BL	Blue Chemical Vulcanizing Cement, 8 oz. (24 per case)
501-90132	ASV32BL	Blue Chemical Vulcanizing Cement, Quart (6 per case)
504-90011	ABSG	Black Bead Sealer, Gallon (4 per case)
504-90032	ABS32	Black Bead Sealer, Quart (6 per case)
504-90005	ABS5G	Black Bead Sealer, 5-Gallon
504-90016	ARS16BK	Black Inner Liner Sealer, 16 oz. (12 per case)
505-90032	ABU32	Inner Liner Cleaner, Quart (12 per case)



504-90032 Black Bead Sealer, Quart



501-90032 Clear Chemical Vulcanizing Cement, Quart



501-90008 Blue Chemical Vulcanizing Cement, 8 oz.



504-90016 Black Inner Liner Sealer, 16 oz.





LEAD WIRE PULL THROUGH PATCH/PLUG

• Easiest and most popular method to fill a nailhole and apply a patch in one simple step • Lead-wire guides the rubber stem through injury

• Stem coated with self vulcanizing material and patch features Versacure bonding gum • For tread area of bias and radial passenger and truck tires



ASCOT NO.	DESCRIPTION	QTY./BOX
587-01303	1/8" Stem Lead Wire Pull Through Patch/Plug	48
587-01306	1/4" Stem Lead Wire Pull Through Patch/Plug	24
587-01309	3/8" Stem Lead Wire Pull Through Patch/Plug	24
587-01406	1/4" Plug-N-Patch: Grey Cushion Gum, Blue Wrap	24
587-01409	3/8" Plug-N-Patch: Grey Cushion Gum, Blue Wrap	24

PUSH THROUGH PATCH/PLUG

• One-piece molded rubber patch/plug unit with a metal quill that protects the stem from damage during insertion • For tread area of bias and radial passenger and truck tires





ASCOT NO.	MFG. NO.	QTY./BOX
587-01151	1/4" (6mm) Stem Push Through Patch/Plug	24
587-01152	1/4" (6mm) Stem Push Through Patch/Plug	48
587-01150	1/8" (3mm) Stem Push Through Patch/Plug	48

PATCH PLUGS

• Quill and lead wire types • Repair using chemical vulcanizing cement



ASCOT NO.	MFG. NO.	DESCRIPTION	QTY./ BOX
587-90003	AQ3	Quill Type Combination Repair: 3/16"	24
587-90016	A3W	Wrapped Stem Lead Wire Combination Repair: 3mm Stem, 2" Cap	_
587-90018	A6W	Wrapped Stem Lead Wire Combination Repair: 6mm Stem, 2" Cap	_
587-90033	A3D	Lead Wire Dipped Stem Combination Repair: 2" Repair Size, 1/8" Dia. Stem, 1/8" Injury	24
587-90066	A6D	Lead Wire Dipped Stem Combination Repair: 2" Repair Size, 5/16" Dia. Stem, 1/4' Injury	24
587-90088	A8D	Lead Wire Dipped Stem Combination Repair: 2" Repair Size, 3/8" Dia. Stem, 5/16" Injury	24
587-90099	A9D	Lead Wire Dipped Stem Combination Repair: 2" Repair Size, 1/2" Dia. Stem, 3/8" Injury	24
587-90110	A8W	Wrapped Stem Lead Wire Combination Repair: 9mm Stem, 2" Cap	-



Cements, Sealants & Patches (cont.)

STANDARD TUBE & **TUBELESS TIRE REPAIRS**

• Feather edge, soft gum repairs • For use with all types of tubes • Repair using chemical vulcanizing cement



541-90020



541-90030



541-90040

ASCOT NO.	MFG. NO.	DESC.	WIDTH	QTY./ BOX
541-90020	ARB20	Large Round	3-1/8"	20
541-90030	ARB30	Medium Round	2-1/8"	30
541-90040	ARB40	Small Round	1-9/16"	40
541-90101	ARB100-1000	Small Round	1-9/16"	1000
541-90255	ARB25-500	Large Round	3-1/8"	500
541-90610	ARB60-1000	Medium Round	2-1/8"	1000

UNIVERSAL/RADIAL BIAS REPAIRS

- For use on private passenger and light truck tires up to 1/4" injuries
- Rubber reinforced soft gum Repair using chemical vulcanizing cement





ASCOT NO.	MFG. NO.	DESCRIPTION	WIDTH	QTY./BOX
550-90000	AWR0	Small Round	1-9/16"	35
550-90001	ASQ1	Small Square (Grey Gum/Red Plastic)	1-3/4"	40
550-90002	ASQ2	Medium Square (Grey Gum/Red Plastic	2-1/8"	40
550-90004	AWR4	Medium Round	2-1/8"	30
550-90005	AWR5	Large Round	3-1/8"	18
550-90006	AWR6	Giant Round	4-1/8"	10
550-90007	AWR7	Small Square (Black Gum/Blue Plastic)	1-3/4"	35
550-90008	AWR8	Medium Square	2-1/4"	25
550-90009	AWR9	Large Square	2-3/4"	15
550-90011	ASQ1T	Small Square (Grey Gum/Red Plastic)	1-3/4"	100
550-90012	ASQ2T	Medium Square (Grey Gum/Red Plastic)	2-1/8"	80
550-90014	AWR4T	Medium Round	2-1/8"	100
550-90015	AWR5T	Large Round	3-1/8"	50
550-90017	AWR7T	Small Square (Black Gum/Blue Plastic)	1-3/4"	100
550-90018	AWR8T	Medium Square (Black Gum/Blue Plastic)	2-1/4"	50
550-90019	AWR9T	Large Square (Black Gum/Blue Plastic)	2-3/4"	50
550-90031	ASQ3T	Large Square (Grey Gum/Red Plastic)	2-1/4"	50
550-90114	AWR4-1000	Medium Round	2-1/8"	1000
550-90200	AWR0T	Small Round	1-9/16"	200
550-90550	AWR5-500	Large Round	3-1/8"	500
550-91000	AWR0-1000	Small Round	1-9/16"	1000
550-91100	ASQ1-1000	Small Square (Grey Gum/Red Plastic)	1-3/4"	1000
550-92100	ASQ2-1000	Medium Square (Grey Gum/Red Plastic)	2-1/8"	1000





EURO UNIVERSAL RADIAL REPAIR

• For bias and radial repairs blue hard gum • Repair using chemical vulcanizing cement

ASCOT NO.	MFG. NO.	DESCRIPTION	SIZE	QTY./BOX
571-92100	ARR02-500	Rubber Reinforced: Round	2 1/4"	500

BIAS HEAVY DUTY UNITS

· ASB series is a cord reinforced soft gum repair • ACB series is a cord reinforced repair with hard blue gum • Repair with chemical vulcanizing cement



564	1-9	0	111

ASCOT NO.	MFG. NO.	DESCRIPTION	SIZE	QTY./BOX
564-90012	ASB2	Bias Heavy Duty	2-7/8"	20
564-90013	ASB3	Bias Heavy Duty	4-5/8"	10
564-90014	ASB4	Bias Heavy Duty	5-1/2" x 7-1/4"	10
564-90015	ASB5	Bias Heavy Duty	7-1/8"	10
564-90016	ASB6	Bias Heavy Duty	10"	10
564-90022	ACB2HD	Bias Heavy Duty	2-7/8"	20
564-90111	ACB1HD	Bias Heavy Duty	2-1/2"	20

SX-10

▲ WARNING: For more information go to www.P65Warnings.ca.gov.

AGRICULTURAL BOOTS

- Designed for tube type repairs in agriculture and construction
- Made with a blend of rubber and cord for strength with a nonchafing surface • Repair using chemical vulcanizing cement



ASCOT NO.	MFG. NO.	DESCRIPTION	SIZE	QTY./ BOX
593-90001	A1L	Oval Agricultural Boot	3" x 4"	20
593-90002	A2L	Oval Agricultural Boot	4" x 6"	10
593-90003	A3L	Oval Agricultural Boot	5-1/2" x 7-1/4"	10
593-90004	A4L	Oval Agricultural Boot	7" x 9-3/4"	10
593-90011	A1R	Round Agricultural Boot	3-3/4"	20
593-90022	A2R	Round Agricultural Boot	4-1/2"	10

RADIAL HEAVY DUTY TRUCK UNITS

• ACX series is a cord reinforced hard blue gum repair (For radial repairs only) • ASX series is a cord reinforced soft gum repair (For radial tires only)





ASCOT NO.	MFG. NO.	DESCRIPTION	SIZE	QTY./BOX
576-90010	ACX10	Radial Heavy Duty	2-1/8" x 3"	20
576-90012	ACX12	Radial Heavy Duty	2-3/4" x 4-1/2"	10
576-90014	ACX14	Radial Heavy Duty	3-3/8" x 5-1/8"	10
576-90020	ACX20	Radial Heavy Duty	3-1/8" x 4-7/8"	10
576-90040	ACX40	Radial Heavy Duty	3-7/8" x 7-5/8"	10
576-90110	ASX10	Radial Heavy Duty	2-1/8" x 3"	20
576-90111	ASX10-300	Radial Heavy Duty	2-1/8" x 3"	300
576-90112	ASX12	Radial Heavy Duty	2-3/4" x 4-1/2"	10
576-90114	ASX14	Radial Heavy Duty	3-3/8" x 5-1/8"	10
576-90120	ASX20	Radial Heavy Duty	3-1/8" x 4-7/8"	10
576-90140	ASX40	Radial Heavy Duty	3-7/8" x 7-5/8"	10
576-90142	ASX42	Radial Heavy Duty	5-1/8" x 10-1/4"	5

STRAND TIRE REPAIR • Excellent emergency repair when a full service

using butyl rubber and 100%

repair facility is unavailable • Produced

saturated cord • Excellent for golf carts, lawn 576-90010 571-90410 **GREAT FOR EMERGENCY REPAIR** 571-90705

AS	SCOT NO.	MFG. NO.	DESCRIPTION
5	71-90410	VRI410	4" Orange, 12 Strand Tire Repair (10 Packets per Box)
5	71-90705	VRI705	7" Black, 5 Strand Tire Repair (10 Packets per Box)



Cements, Sealants & Patches (cont.)

HEAVY DUTY 4" AUTOMOTIVE REPAIR INSERT KIT

• For use on the wheel • Everything needed to make temporary,

emergency repairs to most flat tires caused by nails or other objects up to 1/4" • 518-90130 KIT INCLUDES: (30) 4" temporary inserts, metal t-handle insertion tool, metal t-handle probe, lubricant, cutting blade, Allen wrench and instructions • 518-90160 KIT INCLUDES: (60) 4" temporary inserts, metal t-handle insertion tool, metal t-handle probe, lubricant, cutting blade, Allen wrench and instructions • Blow molded case for easy storage





518-90160

ASCOT NO.	MFG. NO.	DESCRIPTION
518-90130	ATR30K-HD	Heavy Duty 4" Automotive Repair Insert Kit - 30 Repairs
518-90160	ATR60K-HD	Heavy Duty 4" Automotive Repair Insert Kit - 60 Repairs

HEAVY DUTY 8" AUTOMOTIVE REPAIR INSERT KIT

- · For use on the wheel
- Everything needed to make temporary, emergency repairs to most flat tires caused by nails or other objects up to 1/4" • KIT INCLUDES: (30) 8" temporary inserts, metal t-handle insertion tool, metal t-handle probe, lubricant, cutting blade, Allen wrench and instructions • Blow molded case for easy storage

ary ASCOT Supply Corporation MADELIN M

518-90030

ASCOT NO. MFG. NO. DESCRIPTION

518-90030 ATS30K-HD Heavy Duty 8" Automotive Repair Insert Kit - 30 Repairs

BROWN, 12 STRAND TIRE REPAIR INSERT W/ BLUE PAPER BACKING

- 8" brown Made in the USA
- Extended shelf life No leaks • 3rd party testing • EPA approved • Durable cord body
- 100% butyl saturation 6 repairs per packet • 5 packets per box



571-91964



571-91968

ASCOT NO.	MFG. NO.	DESCRIPTION
571-91964	ATS1964	4" Brown, 12 Strand Tire Repair Insert w/ Blue Paper Backing
571-91968	ATS1968	8" Brown, 12 Strand Tire Repair Insert w/ Blue Paper Backing



Ascot Supply Corp. does not recommend "temporary" tire repairs. All repairs should perform the function of filling or replacing the injured section as recommended by the RMA and other industry associations.



SAFETY SEAL® AUTO/LIGHT TRUCK TIRE REPAIR REFILLS

- 24 plies of a custom made high tensile (350 Ib break strength) chemical resistant nylon varn • Each varn is immersed in proprietary rubber sealant system (250% rubber to yarn)
- Patented manufacturing process assures the final Safety® Seal repair has an equal amount of rubber sealant (250% rubber to yarn) through-out the Safety Seal® Repair
- INCLUDES: 60 4" (10cm) refill repairs per kit





585-60410

ASCOT NO. MFG. NO. DESCRIPTION

585-60410 SSRA Auto Light/Truck Tire Repair Refills

- 60 4" (10 cm) Repairs

SAFETY SEAL® TRUCK TIRE REPAIR REFILLS

- 24 plies of a custom made high tensile (350 lb break strength) chemical resistant nylon yarn
- Each yarn is immersed in proprietary rubber sealant system (250% rubber to yarn)
- Patented manufacturing process assures the final Safety Seal® repair has an equal amount of rubber sealant (250% rubber to yarn) through-out the Safety Seal® Repair

• INCLUDES: 30 8" (20cm) refill repairs per kit



585-30820

DESCRIPTION ASCOT NO. MFG NO

585-30820 SSRT Truck Tire Repair Refills - 30 8" (20 cm) Repairs

VULCANIZED TUBELESS TIRE REPAIR SEALS

• For emergency repair use only • String repairs are not designed to be used in lieu of a permanent repair • Repair a punctured tire in a matter of minutes • Made from highstrength yarn and butyl rubber



585-60541

ASCOT NO.	MFG. NO.	DESCRIPTION	QTY./BOX
538-60541	1012060T54TS	4" Orange String Repair	60
585-30581	1012030T58TS	8" Orange String Repair	30
585-10071	105B100PD7AS	8" Thin Black String Repair	100

ATV "ON THE WHEEL TIRE REPAIR KIT"

• Designed for outdoor enthusiasts to repair, inflate and go! • KIT INCLUDES: (1) Needle insertion tool; (6) Self-vulcanizing repairs, (1) CO2 inflator w/ two cartridges; and Instructions • Packed in a water tight display tube package that hang on a peg hook • Can repair all tubeless tires with NO cement needed



The ATV "On The Wheel Tire Repair Kit" Gauge in use.

ASCOT NO. MFG. NO. DESCRIPTION

571-22928 SSKATVTI ATV "On The Wheel Truck Tire Repair Kit"

SAFETY SEAL® TRUCK TIRE REPAIR KIT

 Includes everything to make temporary repairs to most flats caused by nails or other objects up to 1/4" • KIT INCLUDES: 30-8" (20cm) temporary repairs, Metal T-handle insertion tool. Metal T-handle spiral probe. Special lube, Extra insertion needle, Cutting blades, Allen wrench, and Instructions

• Packed in a sturdy carrying case to fit easily under the seat of a truck



ASCOT NO. MFG. NO. DESCRIPTION SSKTP 571-22926 Truck Tire Repair Kit

SAFETY SEAL® DELUXE TIRE REPAIR KIT

- For autos and light trucks "On the Wheel" design for the professional who wants to fix a flat quickly and easily
- Repairs punctures up to 1/4" and seals entire puncture from tread to inner liner
- Also available in other sizes: truck, off-road and heavy equipment



571-22960

ASCOT NO. MFG. NO. DESCRIPTION 571-22960 SSKAP Deluxe Tire Repair Kit



Ascot Supply Corp. does not recommend "temporary" tire repairs. All repairs should perform the function of filling or replacing the injured section as recommended by the RMA and other industry associations.





Cements, Sealants & Patches (cont.)

EURO-STYLE UNIVERSAL REPAIR UNITS

• Rubber reinforced repairs that can be applied in any repairable area of a radial or bias-ply passenger tire • Repairs a maximum injury of 1/4" when following industry recommended repair procedures • Vulcanizes either chemically or with heat



ASCOT NO.	MFG. NO.	DESCRIPTION	SIZE (IN.)	SIZE (MM)	QTY./BOX
571-11307	11-307 Mini Square		1-1/2	38	50
571-11309	11-309	Small Square	1-7/8	48	50
571-11311	11-311	Medium Square	2-1/4	57	50
571-11312	11-312	Large Square	2-1/2	66	50
571-11313	11-313	Small Rectangle	1-3/4 x 3	45 x 75	10

FEATHER-EDGE TUBE REPAIRS

- Designed for repairing inner tubes (chemical vulcanization only)
- Twice as strong as tube being repaired, yet, extremely flexible



ASCOT NO.	MFG. NO.	DESCRIPTION	SIZE (IN.)	SIZE (MM)	QTY./ BOX
541-11000	11-000	Mini Round	1-1/4	32	100
541-11001	11-001	Small Round	1-5/8	43	40
541-11002	11-002	Medium Round	2-1/4	57	30
541-11003	11-003	Large Round	3-1/4	82	20
541-11004	11-004	Small Oval	1-3/8 x 2-3/8	35 x 60	30
541-11005	11-005	Medium Oval	1-3/4 x 3-3/4	45 x 97	20
541-11006	11-006	Large Oval	2-1/2 x 5-5/8	65 x 144	20
541-11007	11-007	Giant Round	5	125	10
541-11008	11-008	Giant Oval	3-3/4 x 6-1/8	95 x 155	10

USA STYLE UNIVERSAL REPAIR UNITS

• For nail hole repairs in radial or bias-ply passenger tires • Chemical vulcanization only • Black vulcanizing gum, blue poly backing



ASCOT NO.	MFG. NO.	DESCRIPTION	SIZE (IN.)	SIZE (MM)	QTY./ BOX
571-11115	11-115	Small Square	1-7/8	47	30
571-11116	11-116	Medium Square	2-1/8	54	30
571-11321	11-321	Small Round	1-5/8	41	30
571-11322	11-322	Medium Round	2-1/4	57	25
571-11323	11-323	Large Round	3-1/4	82	15
571-11324	11-324	Small Oval	1-3/8 x 2-3/8	37 x 61	25
571-11325	11-325	Medium Oval	1-7/8 x 3-7/8	48 x 98	15

UNIVERSAL QUILLED COMBINATION UNITS

• Feature rubber reinforced patch heads • Multi-directional and can be used in any repairable area of radial or bias-ply tires • Black repair unit with black vulcanizing gum • Both stem and repair unit will vulcanize chemically • Stem of combination unit is equipped with a metal quill



А	SCOT NO.	MFG. NO.	PATCH SIZE	STEM SIZE	QTY./BOX
	587-13381	13-381	Round, 1-5/8" Round, 42mm	Round, 5/32" Round, 4mm	20
	587-13382	13-382	Round, 2-1/8" Round, 55mm	Round, 5/16" Round, 8mm	15
5	587-13386	13-386	Square, 2-3/8" Square, 60mm	Flat, 7/16" Flat, 11mm	10
5	587-33810	13-381SQ	Square, 1-5/8" Square, 42mm	Round, 5/32" Round, 4mm	20
	587-33811	13-382SQ	Square, 2-3/8" Square, 60mm	Round, 5/16" Round, 7.5mm	15



DIPPED LEAD-WIRE INSERTS

· Designed to fill the injury in passenger and truck, radial or bias-ply tires • Will vulcanize chemically or in 581-13623 the presence of a heat curing system, becoming a permanent part of the tire • Requires no special insert tool for installation 581-13621 581-13622

ASCOT NO.	MFG. NO.	DESCRIPTION	QTY./BOX
581-13620	13-620	1/4" Dipped Lead Wire Insert	20
581-13621	13-621	3/16" Lead Wire Insert	20
581-13622	13-622	3/8" Lead Wire Insert	20
581-13623	13-623	13/32" Lead Wire Insert	20

"BN" BIAS-PLY REPAIR

- Designed to be applied in any repairable area of tube or tubeless bias-ply tire • Designed for use in puncture, reinforcing or section repairs • Will vulcanize chemically or in high heating curing systems
- Repairs are a unit molded style with premium blue vulcanizing gum on white Mylar backing • Fine feather-edge eliminates chaffing



ASCOT NO.	MFG. NO.	DESCRIPTION	SIZE (IN.)	SIZE (MM)	QTY./ BOX
561-11488	11-488	BN1, 1-Ply	2-1/8"	55	30
561-11489	11-489	BN2, 2-Ply	3"	75	20
561-11490	11-490	BN3, 2-Ply	3-1/2"	89	20
561-11491	11-491	BN4, 2-Ply	4-1/4"	110	10
561-11492	11-492	BN5, 2-Ply	5-1/4"	135	10
561-11493	11-493	BN7, 3-Ply	6.5"	165	10
561-11494	11-494	BN8, 3-Ply	7-1/2"	190	10
561-11495	11-495	BN9, 4-Ply	8-5/8"	220	10
561-11496	11-496	BN10, 6-Ply	9-7/8"	250	5
561-11497	11-497	BN12, 6-Ply	12"	305	5
561-11498	11-498	BN15, 8-Ply	15"	380	3
561-11499	11-499	BN20, 8-Ply	20"	508	3

▲ WARNING: For more information go to www.P65Warnings.ca.gov.

USA STYLE C-O-I RADIAL REPAIR

- Designed for use in puncture, reinforcement or section repairs in any repairable area of passenger, truck, agricultural or earthmover radial tires • Repair is black with gray vulcanizing gum on a blue poly backing
- Each reinforced ply is individually end-wrapped to deflect tire flexing stresses in a unique manner • New tie-gum construction eliminates the potential for delamination common in competitive brands • Will vulcanize chemically or in low temperature (precure) systems





ASCOT NO.	MFG. NO.	DESC.	SIZE (IN.)	SIZE (MM)	QTY./BOX
571-11808	11-808	Radial 10, 1-Ply	1-5/8" x 3"	42 x 75	20
571-11810	11-810	Radial 10, 1-Ply	2-3/8" x 3"	60 x 75	20
571-11812	11-812	Radial 12, 1-Ply	2-1/4" x 4"	57 x 100	10
571-11814	11-814	Radial 14, 1-Ply	3-3/4" x 4"	95 x 100	10
571-11820	11-820	Radial 20, 2-Ply	2-7/8" x 5"	72 x 125	10
571-11822	11-822	Radial 22, 2-Ply	3"x 6"	75 x 150	10
571-11824	11-824	Radial 24, 2-Ply	3" x 8-1/2"	75 x 215	10
571-11825	11-825	Radial 25, 3-Ply	4-1/2" x 5"	115 x 125	10
571-11835	11-835	Radial 35, 3-Ply	5-1/4" x 7"	133 x 180	10
571-11840	11-840	Radial 40, 3-Ply	4" x 7-3/8"	100 x 188	10
571-11842	11-842	Radial 42, 4-Ply	5" x 10"	125 x 254	10
571-11844	11-844	Radial 44, 4-Ply	5" x 13"	125 x 330	10
571-11845	11-845	Radial 45, 4-Ply	7-1/2" x 9-1/2"	190 x 240	5



Cements, Sealants & Patches (cont.)

DIPPED LEAD-WIRE COMBINATION UNITS

- Requires no special wire pulling tools, just insert lead wire into the injury from the inside of the tire and pull the repair unit through from the outside • Stem and repair unit are gum-coated to provide the most complete bond, both inside the injury and on the innerliner
- Will vulcanize chemically or in a heat cure system Stem portion is dip coated, Patch has gray vulcanizing gum and blue poly backing



ASCOT NO.	MFG. NO.	PATCH SIZE	STEM DIAMETER	QTY./BOX
583-13670	13-670	1" (27mm)	1/8" (3.8mm)	20
583-13672	13-672	1-5/8" (42mm)	3/16" (5mm)	24
583-13673	13-673	2-1/8" (55mm)	1/4" (6mm)	24
583-13674	13-674	2-1/8" (55mm)	3/8" (8.5mm)	24



ASCOT NO.	MFG. NO.	PATCH SIZE	STEM DIAMETER	QTY./BOX
583-23672	13-672G	1-5/8" (42mm)	3/16" (4.5mm)	24
583-23673	13-673G	2-1/8" (55mm)	1/4" (6mm)	24
583-23674	13-674G	2-1/8" (55mm)	5/16" (8mm)	24
583-23675	13-675G	2-1/8" (55mm)	3/8" (10mm)	16

BUFFING SOLUTION





505-14100

505-14102

ASCOT NO.	MFG. NO.	DESCRIPTION	TYPE	SIZE
505-14100	14-100	Buffing Solution	Flammable	32 oz.
505-14102	14-102	Aerosol Buff	Non-Flammable	16 oz.

SEALERS





504-14111 504-14228

ASCOT NO.	MFG. NO.	DESCRIPTION	TYPE	SIZE
504-14100	14-101	Bead Sealer	Flammable	1 Gal.
504-14104	14-104	Bead Sealer	Flammable	5 Gal.
504-14111	14-101A	Bead Sealer - Heavy Duty	Flammable	32 Oz.
504-14228	14-128A	Inner Liner Sealer	Flammble	16 Oz.

CHEMICAL VULCANIZING CEMENT

• Offering both flammable and non-flammable cements • Flammable cements tend to dry faster • In certain regions, non-flammable cements required by law or regulation • Contains accelerators which, when coming into contact with the face gum on any "X-tra Seal" repair unit, will begin the vulcanization process



ASCOT NO.	MFG. NO.	DESCRIPTION	TYPE	SIZE
501-14008	14-008	Vulcanizing Cement	Flammable	8 oz.
501-14032	14-032	Vulcanizing Cement	Flammable	32 oz.
501-14511	14-511	HD Supr-Blu Cement	Flammable	8 oz.
501-14512	14-512	HD Supr-Blu Cement	Flammable	32 oz.
501-14513	14-513	Vulcanizing Cement	Non-Flamm.	8 oz.
501-14514	14-514	Vulcanizing Cement	Non-Flamm.	32 oz.
501-14515	14-515	Black Vulc. Cement	Flammable	32 oz.



Air Buffers & Drills

HIGH-SPEED TIRE BUFFER WITH QUICK CHANGE CHUCK

• Equipped with a quick change chuck to allow for rapid changes to a variety of tire repair tasks • APPLICATIONS: Ideal for scuffing, grinding, cleaning and many other uses requiring high speed and is equipped with safety throttle lever • Includes one guickchange adapter • FREE SPEED: 20,000 RPM • MADE IN USA



157-06010

ASCOT NO.	MFG. NO.	DESCRIPTION
157-06010	SLP-6010	High-Speed Tire Buffer with Quick Change Chuck
157-16010	SI D-6010 DEK	Above with Dear Exhaust Hose Kit

HIGH SPEED TIRE BUFFER KIT

- · Jacobs chuck for holding buffing accessories • Lock-off throttle
- · APPLICATIONS: Tire patchwork, roughing areas for recapping and cleaning tire moldings • FREE SPEED: 20.000 RPM • MADE IN USA



ASCOT NO.	MFG. NO.	DESCRIPTION 157-04038
157-04038	SLP-4038	High-Speed Tire Buffer with Jacob's Chuck
157-14038	SLP-4038REK	Above with Rear Exhaust Hose Kit

SLP-6550REK | Above with Rear Exhaust Hose Kit

HEAVY DUTY SK

- APPLICATIONS: Excel work due to the more: gear package which co durability • FREE SPEE
- · Rear exhaust perform with safety throttle lev
- · Includes one guick-ch adapter • MADE IN US.

ASCOT NO.

157-06550

157-16550

JTY SKIVING	G TOOL	
NS: Excellent for ne more substant which contribute REE SPEED: 2,80 t performance • frottle lever	rial es to 0 RPM Equipped	FOR SKIVING WORK
quick-change DE IN USA	MADE IN THE	in con minute
7E III 03/1	USA	
MFG. NO.	DESCRIPTION	
SLP-6550	Heavy Duty Skiving Tool	157-06550

LOW-SPEED TIRE **BUFFER WITH QUICK** CHANGE CHUCK

- FREE SPEED: 2,800 RPM 90 PSI Required air pressure • 1/4"NPT. Air Inle
- 3/8" required hose size WEIGHT: 2.2
- 8.5" in length Quick change chuck for fast change of buffing accessories

let 25 lb.	C	QUICK HANGE CHUCK	1
	MADE IN THE USA	157-06510	

ASCOT NO.	MFG. NO.	DESCRIPTION
157-06510	SLP-6510	Low-speed tire buffer with quick change chuck
157-16510	SI P-6510REK	Ahove with Rear Exhaust Hose Kit



• Brass bushings provide performance and durability in tough working conditions • Includes whip hose and exhaust hose • Quick change slip chuck for fast and easy change of buffing wheel • Built-in regulator • Lock off throttle to prevent accidental start ups • Rear exhaust directs air away from the work area • APPLICATIONS: Ideal for patchwork, roughing areas for recapping and cleaning tire moldings • Overhose Kit also Available Separately (175-00873)

158-10873

QUICK

CHANGE

QUICK

CHANGE SLIP

CHUCK

ASCOT NO. MFG. NO. A873K 158-10873

DESCRIPTION

Low Speed Tire Buffer with Quick Change Slip Chuck

HIGH SPEED BUFFER KIT WITH QUICK CHANGE CHUCK

· Quick change chuck for holding buffing accessories • Lock-off throttle • FREE SPEED: 22,000 RPM • APPLICATIONS: Tire patchwork, roughing areads for recapping and cleaning tire moldings • Includes overhose kit

ASCOT NO. MFG. NO. 158-11871 A871K-QC DESCRIPTION

High Speed Buffer Kit with Quick Change Chuck



SUPPLY CORPORATION

Air Buffers & Drills (cont.)

HIGH SPEED TIRE BUFFER WITH OVERHOSE KIT

· Jacobs chuck for holding buffing accessories • Lockoff throttle • FREE SPEED: 22,000 RPM • APPLICATIONS: Tire patchwork, roughing areas for recapping and cleaning tire moldings • Includes overhose kit



ASCOT NO 158-10871

MFG. NO. A871K

DESCRIPTION

High Speed Tire Buffer with Overhose Kit

158-10871

HIGH-SPEED TIRE BUFFER WITH JACOBS CHUCK

· Provides plenty of power with it's .5 horsepower motor and 22,000 RPM. rear exhaust performance

· APPLICATIONS: Ideal for patchwork, roughing areas for recapping and cleaning tire moldings • Equipped with safety throttle lever



Chicago Pneumatic

ASCOT NO.

MFG. NO.

DESCRIPTION

158-00871 CP-871K

High-Speed Tire Buffer with Jacobs Chuck - Includes Over Hose

LIGHTED LOW-SPEED BUFFER WITH QUICK-CHANGE CHUCK

· Provides light inside the tire without the use of batteries or other external power sources • Volt-Aire patented technology turns the motor into a working generator to bring electricity and light to the work surface for enhanced visibility, safety and productivity • Geared design provides high torque but low speed to prevent burning of work surface • Quick-change chuck allows operator to make rapid changes a variety of tool accessories • MADE IN USA



157-06520

ASCOT NO.	MFG. NO.	DESCRIPTION
157-06520	SLP-6520L	Lighted Low-Speed Tire Buffer with Quick Change Chuck
157-16520	SLP-6520REK	Above with Rear Exhaust Hose Kit



HEAVY DUTY AIR LOW SPEED TIRE BUFFER

• APPLICATIONS: For quick work of patchwork and roughing up low areas for recapping, tire scuffing and cleaning tire moldings • Free speed up to 3,000 RPM • 1/2 HP motor

ASCOT NO. 157-01327


MFG. NO. IR-327LS

Buffer - Includes Over Hose

157-01327

LOW SPEED TIRE BUFFER KIT

· Quick change slip chuck for fast and easy change of buffing wheel • Adjustable speed regulator for precise control • Lockoff throttle to prevent accidental start ups • Rear exhaust directs air away from work area

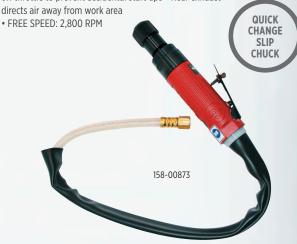

ASCOT NO.

MFG. NO.

158-00873 CP-873K

Low Speed Tire Buffer Kit - Includes Over Hose





Tire Repair Tools & Accessories

SLOTTED FINISHING RASPS

CONTOUR CUP RASPS



539-02203



539-02206



DURABLE &

▲ WARNING: For more information go to www.P65Warnings.ca.gov.



539-02207



ASCOT NO.	MFG. NO.	GRIT	DESCRIPTION
539-02203	2203	36-Grit	2" x 3/16" Slotted Finishing Rasp
539-02204	2204	36-Grit	2" x 3/16" Slotted Finishing Rasp
539-02205	2205	16-Grit	2" x 3/8" Slotted Finishing Rasp
539-02206	2206	16-Grit	2" x 3/8" Slotted Finishing Rasp
539-02207	2207	36-Grit	2" x 1/2" Slotted Finishing Rasp
539-02208	2208	16-Grit	2" x 1/2" Slotted Finishing Rasp
539-02209	2209	36-Grit	2" x 3/4" Slotted Finishing Rasp
539-02210	2210	16-Grit	2" x 3/4" Slotted Finishing Rasp
539-02241	2241	36-Grit	2" x 1" Slotted Finishing Rasp









539-06411

DURAE	BLE &
EFFICI	ENT

ASCOT NO.	MFG. NO.	GRIT	DESCRIPTION
539-06261	TCW210	36-Grit	2"x 1-3/8" - 3/8" Arbor Hole
539-06260	TCW210	16-Grit	2"x 1-3/8" - 3/8" Arbor Hole
539-06360	TCW310	36-Grit	3" x 1" - 3/8" Arbor Hole
539-06361	TCW310	16-Grit	3" x 1" - 3/8" Arbor Hole
539-06310	TCW315	36-Grit	3" x 1-1/2" - 3/8" Arbor Hole
539-06311	TCW315	16-Grit	3" x 1-1/2" - 3/8" Arbor Hole
539-06312	TCW315	36-Grit	3" x 1-1/2" - 1/2" Arbor Hole
539-06313	TCW315	16-Grit	3" x 1-1/2" - 1/2" Arbor Hole
539-06314	TCW315	36-Grit	3" x 1-1/2" Vented - 3/8" Arbor Hole
539-06315	TCW315	16-Grit	3" x 1-1/2" Vented - 3/8" Arbor Hole
539-06316	TCW315	36-Grit	3" x 1-1/2" Vented - 1/2" Arbor Hole
539-06317	TCW315	16-Grit	3" x 1-1/2" Vented - 1/2" Arbor Hole
539-06410	TCW415	36-Grit	4" x 1-1/2"- 1/2" Arbor Hole
539-06411	TCW415	16-Grit	4" x 1-1/2" - 1/2" Arbor Hole
539-06412	TCW415	36-Grit	4" x 1-1/2" - 5/8" Arbor Hole
539-06413	TCW415	16-Grit	4" x 1-1/2" - 5/8" Arbor Hole
539-06414	TCW415	36-Grit	4" x 1-1/2" Vented - 1/2" Arbor Hole
539-06415	TCW415	16-Grit	4" x 1-1/2" Vented - 1/2" Arbor Hole
539-06416	TCW415	36-Grit	4" x 1-1/2" Vented - 5/8" Arbor Hole
539-06417	TCW415	16-Grit	4" x 1-1/2" Vented - 5/8" Arbor Hole

B&J NON-REGRITTABLE COPPER CONTOUR WHEELS

• The B&J Contour Wheels have a convex contour, which has proven to be particularly suitable for repairs inside the tire • Smaller models are almost completely covered with grit on their surface, so they can be used at any angle • Also ideal for sidewall machining • The variery of grain sizes available provides an optimum surface for every application



ASCOT NO.	MFG. NO.	GRIT	DESCRIPTION
539-10116	332001-16	16 Grit	2" x 1" Copper Contour Wheel (50 x 25mm) AH 3/8"
539-10123	332001-23	23 Grit	2" x 1" Copper Contour Wheel (50 x 25mm) AH 3/8"
539-10136	332001-36	36 Grit	2" x 1" Copper Contour Wheel (50 x 25mm) AH 3/8"
539-10160	332001-60	60 Grit	2" x 1" Copper Contour Wheel (50 x 25mm) AH 3/8"
539-11016	332010-16	16 Grit	3" x 1" Copper Contour Wheel (76 x 25mm) AH 3/8"
539-11023	332010-23	23 Grit	3" x 1" Copper Contour Wheel (76 x 25mm) AH 3/8"
539-11036	332010-36	36 Grit	3" x 1" Copper Contour Wheel (76 x 25mm) AH 3/8"
539-11060	332010-60	60 Grit	3" x 1" Copper Contour Wheel (76 x 25mm) AH 3/8"
539-10916	332009-16	16 Grit	3" x 1.5" Copper Contour Wheel (76 x 38mm) AH 3/8"
539-10923	332009-23	23 Grit	3" x 1.5" Copper Contour Wheel (76 x 38mm) AH 3/8"
539-10936	332009-36	36 Grit	3" x 1.5" Copper Contour Wheel (76 x 38mm) AH 3/8"
539-10960	332009-60	60 Grit	3" x 1.5" Copper Contour Wheel (76 x 38mm) AH 3/8"
539-10416	332004-16	16 Grit	4" x 1.5" Copper Contour Wheel (102 x 38mm) AH 3/8"
539-10423	332004-23	23 Grit	4" x 1.5" Copper Contour Wheel (102 x 38mm) AH 3/8"
539-10436	332004-36	36 Grit	4" x 1.5" Copper Contour Wheel (102 x 38mm) AH 3/8"
539-10460	332004-60	60 Grit	4" x 1.5" Copper Contour Wheel (102 x 38mm) AH 3/8"

B&J NON-REGRITTABLE COPPER BUFFOUT WHEELS

• Buffout Tools are ideal for all types of tire repairs • With a variety of sizes and shapes repairs can be carried out guickly and effectively • Due to the narrow tool width of 3 mm and more, the area to be repaired remains as small as necessary and saves unnecessary filling material afterwards • The special design makes the tools durable and efficient



ASCOT NO.	MFG. NO.	GRIT	DESCRIPTION
539-15616	332056-16	16-Grit	Flat Faced Buffout Wheel 2" x 3/16" (50 x 5mm)
539-15636	332056-36	36-Grit	Flat Faced Buffout Wheel 2" x 3/16" (50 x 5mm)
539-15816	332058-16	16-Grit	Flat Faced Buffout Wheel 2" x 1/4" (50 x 7mm)
539-15836	332058-36	36-Grit	Flat Faced Buffout Wheel 2" x 1/4" (50 x 7mm)
539-16316	332063-16	16-Grit	Flat Faced Buffout Wheel 2" x 3/8" (50 x 10mm)
539-16336	332063-36	36-Grit	Flat Faced Buffout Wheel 2" x 3/8" (50 x 10mm)
539-16416	332064-16	16-Grit	Round Faced Buffout Wheel 2" x 1/2" (50 x 13mm)
539-16436	332064-36	36-Grit	Round Faced Buffout Wheel 2" x 1/2" (50 x 13mm)
539-16516	332065-16	16-Grit	Round Faced Buffout Wheel 2" x 3/4" (50 x 19mm)
539-16536	332065-36	36-Grit	Round Faced Buffout Wheel 2" x 3/4" (50 x 19mm)





B & J AIRBOT BUFFOUT WHEELS

• The new AIRBOT® series not only look aggressive, they also work aggressively • With their open design and the angled setup they are much more efficient in getting the job done than any predecessors • Improved cooling • Rounder buffing profile • Longer lifetime • Faster grinding cycles



ASCOT NO.	MFG. NO.	DESCRIPTION
539-18516	132185-16	RFBOT AIRBOT Ø2"x 3/16", AH 3/8", Grit 16 Buffout Wheel
539-18536	132185-36	RFBOT AIRBOT Ø2"x 3/16", AH 3/8", Grit 36 Buffout Wheel
539-18616	132186-16	RFBOT AIRBOT Ø2"x 1/4", AH 3/8", Grit 16 Buffout Wheel
539-18636	132186-36	RFBOT AIRBOT Ø2"x 1/4", AH 3/8", Grit 36 Buffout Wheel
539-18716	132187-16	RFBOT AIRBOT Ø2"x 3/8", AH 3/8", Grit 16 Buffout Wheel
539-18736	132187-36	RFBOT AIRBOT Ø2"x 3/8", AH 3/8", Grit 36 Buffout Wheel
539-18816	132188-16	RFBOT AIRBOT Ø2"x 1/2", AH 3/8", Grit 16 Buffout Wheel
539-18836	132188-36	RFBOT AIRBOT Ø2"x 1/2", AH 3/8", Grit 36 Buffout Wheel
539-18416	132184-16	RFBOT AIRBOT Ø4"x 1/2", AH 1/2", Grit 16 Buffout Wheel
539-18436	132184-36	RFBOT AIRBOT Ø4"x 1/2", AH 1/2", Grit 36 Buffout Wheel
539-15516	132155-16	RFBOT AIRBOT Ø6"x 1/2", AH 1/2", Grit 16 Buffout Wheel
539-15536	132155-36	RFBOT AIRBOT Ø6"x 1/2", AH 1/2", Grit 36 Buffout Wheel

B & J SUPER PATRIOT CONTOUR WHEEL

• Super Patriot's patented design is significantly efficient since cooling is achieved throughout the entire working surface of the tool due to the concave/ convex base design • Customers' feedback after using the Patriot carbides is based on the products significantly longer life vs. conventional carbides



539-28646

ASCOT NO.	MFG. NO.	DESCRIPTION
539-28646	133286-460	3" X 1-1/4" CWSP 460 grit 3/8"AF

B&JHD **BUFFOUT** WHEELS

- Improved durability
- Aggressive and efficient • Longer lifetime then conventional "16-grit" carbides







E70 77004



E70 77017

	539-33004	539-3301/
ASCOT NO.	MFG. NO.	DESCRIPTION
539-32056	332056-HD	2" x 3/16" RFBOT HD Buffout Wheel
539-32058	332058-HD	2" x 1/4" RFBOT HD Buffout Wheel
539-32063	332063-HD	2" x 3/8" RFBOT HD Buffout Wheel
539-32064	332064-HD	2" x 1/2" RFBOT HD Buffout Wheel
539-32065	332065-HD	2" x 3/4" RFBOT HD Buffout Wheel
539-33010	332010-HD	3" x 1" Contour Wheel HD Grit 3/8" AH
539-33009	332009-HD	3" x 1.5" Contour Wheel HD Grit 3/8" AH
539-33004	332004-HD	4" x 1.5" Contour Wheel HD Grit 3/8" AH
539-33017	332017-HD	4" x 1.5" Contour Wheel HD Grit 1/2" AH



TIRE REPAIR KNIVES

• Rubber must be cleaned and hole injuries must be cleaned and roughened before inserting repair units



ASCOT NO.	MFG. NO.	DESCRIPTION	BLADE LENGTH	QTY./ BOX
531-60570	X751N	High carbon steel, hawk bill notch, glaze finish, round burnt finish handle (riveted)	2" / 51mm	12
531-75190	X2T	High carbon steel, taper point, glaze finish, round burnt finish handle (riveted)	4" / 102mm	12
537-75310	X3N	High carbon steel, round point, thin skiver, glaze finish, round burnt finish handle	4-7/8" / 124mm	12
531-75200	X1S		2-1/2" / 64mm	12
531-75170	X2S	High carbon steel, square	3" / 76mm	12
531-75330	X3S	point, glaze finish, round burnt finish handle (riveted)	3-5/8" / 93mm	12
531-75370	X4S		3-7/8" / 99mm	12
531-75440	X5S		4-1/4" / 108mm	12

RUBBER KNIFE

• High carbon steel, square point, glaze finish, round burnt finish handle (riveted)



ASCOT NO.	MFG. NO.	DESCRIPTION	BLADE LENGTH	QTY./BOX
531-60070	X4x1S		4" x 1" / 102 x 26mm	12
531-60090	X5x1S	High carbon steel, square point, glaze finish, round burnt finish handle (riveted)	5" x 1" / 127 x 26mm	
531-60130	X6x1S		6" x 1" / 152 x 26mm	
531-60150	X8x11/8S		8" x 1-1/8" / 203 x 29mm	
531-60170	X10x11/4S		10" x 1-1/4" / 254 x 32mm	

FLEXIBLE TIRE REPAIR KNIFE

• High carbon steel, round point skiver, glaze finish, round burnt finish handle (riveted)







531-75150

ASCOT NO.	MFG. NO.	DESCRIPTION	BLADE LENGTH	QTY./BOX
531-75150	X2RF	High carbon steel, round point skiver, glaze finish, round burnt finish handle (riveted)	4" / 102mm	12

SKIVING KNIFE

531-70030





531-71050


ASCOT NO.	MFG. NO.	DESCRIPTION
531-70030	70030	4-1/2" Handle for X2 Blades
531-71050	71050	10 Replacement blades

OTHER KNIVES

ASCOT NO.	MFG. NO.	DESCRIPTION
531-60300	60300	4" x 1" Curved Notch Repair Knife
531-60310	60310	6" x 1-1/2" 5-Notch Trim Knife
531-75220	75220	3/8" Curved Point Shoe Knife
531-75310	X3N	4-7/8" Round Point Skiving Knife
531-75220	75220	3/8" Curved Point Shoe Knife



TIRE RELATED HAND TOOLS

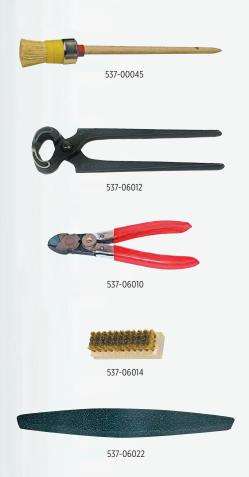

ASCOT NO.	MFG. NO.	DESCRIPTION
537-00045	45	Retreaders Brush
537-06010	6010	Geared Side Cutter for Steel Cords
537-06012	6012	8" Steel Nippers
537-06014	6014	Brass Brush for Cleaning Repair
537-06022	6022	9" Whetstone

PROFESSIONAL HEAVY DUTY TIRE REAMERS



ASCOT NO.	MFG. NO.	DESCRIPTION
537-17276	1-R	3/16" Diameter - Blade Length - 6-3/4"
537-17277	2-R	1/4" Diameter - Blade Length - 8-3/4"

TIRE REPAIR AIR TOOL ACCESSORIES



ASCOT NO.	MFG. NO.	DESCRIPTION
173-00018	QC18	Quick Chuck Adapter W/ Collar
173-00019	QC19	Quick Chuck Adapter W/ Spacer 1" x 3/8" Thread
173-00020	QC20	Quick Chuck Adapter For 1/8" Shank
173-00022	QC22	Quick Chuck Adapter For 1/4" Shank
173-00023	QC23	Quick Chuck Adapter For 5/16" Shank
173-09150	SLP-9150	Jacobs 3/8" Precision Chuck and Key
173-09165	SLP-9165	Quick Change Chuck - 3/8"-24 Mounting Thread
173-09166	SLP-9166	Quick Change Chuck - 1/2"-13 Mounting Thread
173-09167	SLP-9167	Quick Change Chuck - 1/2"-20 Mounting Thread
173-09201	SLP-9201	1-11/16" x 3/8"-24 Chuck Adapter w/Washer & Nut
173-09202	SLP-9202	2-3/4" x 3/8"-24 Chuck Adapter w/Nut & Wheel Spacer
173-09211	SLP-9211	1-7/8" x 3/8"-24 Threaded Adapter w/Washer & Nut
173-09212	SLP-9212	2-1/4" x 3/8"-24 Threaded w/ Nut & Wheel Spacer
173-09213	SLP-9213	1-15/16" Adapter w/Set Screw for 1/8" Shank
173-09214	SLP-9214	1-15/16" Adapter w/Set Screw for 3/16" Shank
173-09215	SLP-9215	1-15/16" Adapter w/Set Screw for 1/4" Shank
173-09216	SLP-9216	1-15/16" Adapter w/Set Screw for 5/16" Shank
173-09400	SLP-9400	Overhose Kit



INSERTION TOOLS

ASCOT NO.	MFG. NO.	DESCRIPTION	HANDLE
537-90116	TST	Metal T-Handle Automotive/ Light Truck Insertion Tool	Metal
537-90144	TTT	Metal T-Handle Truck Insertion Tool	Metal
537-91119	APRBR	Metal T-Handle Spiral Probe for Automotive/Light Truck	Metal
537-10010	SSTA	Metal T-Handle Insertion Tool for Auto/Light Truck: 6"	Metal
537-10012	SSTT	Metal T-Handle Insertion Tool for Truck: 8"	Metal
537-10017	SSPS	Metal T-Handle Probe Spiral for Auto/Light Truck: 6"	Metal
537-10021	SSPT	Metal T-Handle Probe Spiral for Truck: 8"	Metal
537-90135	AWRN35	Replacement Needle: 3-1/2"	-
537-90155	AWRN55	Replacement Needle: 5-1/2"	-
537-10011	SSNA	Replacement Needle for Auto/ Light Truck Insertion Tool: 5"	-
537-10013	SSNT	Replacement Needle for Truck Insertion Tool: 6-3/4"	-

ASCOT NO.	MFG. NO.	DESCRIPTION	HANDLE
537-90006	TST	Chrome Plated T-Handle with 3" Replaceable Needle	Chrome
537-90019	TSPRB	Chrome Plated T-Handle Spiral Probe	Chrome
537-90200	TSBRP	Chrome Plated T-Handle with Barbed Rasp	Chrome
537-90002	SEPG	Plastic Pistol Grip Handle - Short	Plastic
537-90003	OETT	Plastic T-Handle	Plastic
537-90005	OE11	Heavy Duty Screwdriver-Type Handle: 11"	Plastic
537-90009	SPPG	Plastic Pistol Grip Handle Spiral Probe	Plastic
537-90150	P150	Heavy Duty Screwdriver-Type Handle Barbed Rasp	Plastic
537-90201	PPG	Plastic Pistol Grip Handle Barbed Rasp	Plastic
537-90035	WRN35	Replacement Needle: 3-1/2"	-
537-90045	WRN45	Replacement Needle: 4-1/2"	-
537-90119	PRBR	Replacement Spiral Probe	-







MISC. INSERTION TOOLS, RASPS & NEEDLES

ASCOT NO.	MFG. NO.	DESCRIPTION
537-00027	27	Replacement Blades for Rubber Scraper
537-00028	28	Rubber Scraper
537-00575	575	Truck Repair Insertion Tool
537-00585	585	EM Repair Insertion Tool
537-02240	6003	Radial Tire Repair Specialist Rasp - 1/4"
537-02241	6003T	Radial Tire Repair Specialist Rasp for Truck Tires
537-10565	565	Car Repair Insertion Tool
537-36560	190	Awl/Probe
537-95893	199	Probe Buffer/Stickleback Rasp
537-15224	14-925	Super-Grip Open-Eye Needle
537-15225	14-204	Super-Grip Tire Probe
537-15226	14-213	Super-Grip Closed-Eye Needle
537-15227	14-216	Super-Grip Spilt-Eye Needle
537-15230	14-317	Heavy Duty Metal Split-Eye Needle
537-15232	14-204	Super-Grip Heavy Duty Tire Probe







▲ WARNING: For more information go to www.P65Warnings.ca.gov.












Rubberhog® Tire **Repair Tools**

Rubberhog features innovations from the leader in the industry. The Rubberhog Original SSG coating uses the best technology to ensure peace of mind.

- · Buffs cooler, no scorching
- Fantastic wear life; costing you less per repair
- Better surface texture for a safer bond
- Faster material removal, for a quicker repair

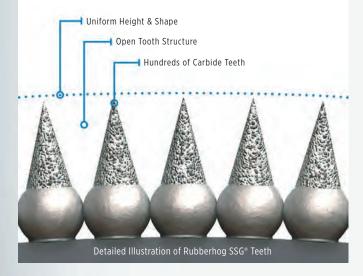

LOW-PROFILE PATCH PREP WHEEL

- Unique design allows buffing in low profile tires without risking sidewall damage
- Solid steel construction makes this the smoothest running product available





ASCOT NO. MFG. NO. DESCRIPTION 538-14000 1-1/4" Dia., 3/8"-24 Thread, Fine (SSG 170)

FLARED CONTOUR WHEELS

The unique profile of the Flared Contour Wheels properly matches the shape of the tire.

• Provides wide, level contact with surface • Efficient use of the entire tool • Easier to use - less operator fatigue • Reduced buffing time







538-12200

REDUCED BUFFING

ASCOT NO.	MFG. NO.	DESCRIPTION
538-10000	RH100	1-3/4" Dia 3/8" Bore, Fine (SSG 170)
538-10200	RH102	1-3/4" Dia., 3/8" Bore, Medium (SSG 230)
538-13017	RH130-170	2" Dia., 3/8" Bore, Fine (SSG 170)
538-13023	RH130-230	2" Dia., 3/8" Bore, Medium (SSG 230)
538-10700	RH107	2-1/2" Dia., 3/8" Bore, Fine (SSG 170)
538-10900	RH109	2-1/2" Dia., 3/8" Bore, Medium (SSG 230)
538-11100	RH111	2-1/2" Dia., 3/8" Bore, Coarse (SSG 390)
538-11200	RH112	3" Dia., 3/8" Bore, Fine (SSG 170)
538-11400	RH114	3" Dia., 3/8" Bore, Medium (SSG 230)
538-11600	RH116	3" Dia., 3/8" Bore, Coarse (SSG 390)
538-11800	RH118	3-1/2" Dia., 3/8" Bore, SSG Fine (SSG 170)
538-12000	RH120	3-1/2" Dia., 3/8" Bore, Medium (SSG 230)
538-12200	RH122	3-1/2" Dia., 3/8" Bore, Coarse (SSG 390)





RUBBERHOG

POLYPLUGS FOR FLARED **CONTOUR WHEELS**

• Easily fits inside the contour wheel • Compensates for mounting inaccuracies • Reduces vibration for smoother, quieter, more comfortable operation • Reusable! • Protects from wheel damage



ASCOT NO.	MFG. NO.	DESCRIPTION
538-15000	RH150	1-3/4" PolyPlug
538-15100	RH151	2" PolyPlug
538-15200	RH152	2-1/2" PolyPlug
538-15400	RH154	3" PolyPlug
538-15600	RH156	3-1/2" PolyPlug

• Larger Spheres are excellent for high-tread skiving • Smaller Spheres chamfer around injuries on liner; don't take a chance on entrapped air!

1/4" SHAFT SPHERES



ASCOT NO.	MFG. NO.	DESCRIPTION
538-60100	RH601	5/8" Sphere, 1/4" Shaft, Coarse (SSG 330)
538-60300	RH603	7/8" Sphere, 1/4" Shaft, Coarse (SSG 330)
538-60500	RH605	1-1/8" Sphere, 1/4" Shaft, Coarse (SSG 330)

ECONOMY FLARED CONTOUR WHEEL

• Proven Rubberhog shape • Uses the Standard Grit coating for an economical solution • Reduced aggressiveness for the less experienced user • Much safer than black stones!



REUSABLE!

538-13000

1/4" & 1/8" SHAFT TAPERS

• Excellent for high-tread skiving



538-61100

ASCOT NO.	MFG. NO.	DESCRIPTION
538-61100	RH611	5/8" Taper, 1/4" Shaft, Coarse (SSG 330)
538-61300	RH613	7/8" Taper, 1/4" Shaft, Coarse (SSG 330)
538-00018	T-18-E	1/8" Taper, 1/8" Shaft, Fine (SSG 170)

MFG. NO. DESCRIPTION ASCOT NO. 538-13000 RH130 2" Contour Wheel. 3/8" Bore, 60 Grit

BU770UT WHFFLS

- Free cutting and long lasting
- Fully-rounded profile Excellent for bias tires • Use for skiving on hightread radial tires; not recommended for contact with steel cord



538-30400

▲ WARNING: For more information go to www.P65Warnings.ca.gov.

ASCOT NO.	MFG. NO.	DESCRIPTION
538-30000	RH300	2" x 1/4" W, Medium (SSG 230)
538-30200	RH302	2" x 1/4" W, Coarse (SSG 390)
538-30400	RH304	2" x 3/8" W, Medium (SSG 230)
538-30600	RH306	2" x 3/8" W, Coarse (SSG 390)
538-30500	RH308	2" x 1/2" W, Medium (SSG 230)
538-31000	RH310	2" x 1/2" W, Coarse (SSG 390)
538-31200	RH312	2" x 3/4" W, Medium (SSG 230)
538-31400	RH314	2" x 3/4" W, Coarse (SSG 390)



1/8" SHAFT REPAIR KIT



ASCOT NO.	MFG. NO.	DESCRIPTION
538-63500	RH635	1/8" Shaft Tool Kit, Fine (SSG 170)



1/4" & 1/8" SHAFT ROTOR SAWS

• Excellent for high-tread skiving





ASCOT NO.	MFG. NO.	DESCRIPTION
538-61900	RH619	1-3/8" Rotor Saw, 1/4" Shaft, Coarse (SSG 330)
538-00340	RS-34-E	3/4" Rotor Saw, 1/8" Shaft, Fine (SSG 170)

DISC/DISH SIDEWALL WHEELS

• For angle head machines; section repair & cosmetics



DISC VS. DISH SHAPE

The Disc shape is just slightly curved while the Dish is much more rounded. The selection of shape is based on operator preference, and the job being done. Both wheels are excellent for exterior repair work, while the Dish Wheel can also be used inside of very large tires.



ASCOT NO. MFG. NO.		MFG. NO.	DESCRIPTION
	538-41239	DW4120390	4-1/2" Dish Wheel, 7/8" Bore, Coarse (SSG 390)
	538-41223	DW4120230	4-1/2" Dish Wheel, 7/8" Bore, Medium (SSG 230)
	538-42239	SD4120390	4-1/2" Disc, 7/8" Bore, Coarse (SSG 390)
	538-42223	SD4120230	4-1/2" Disc. 7/8" Bore. Medium (SSG 230)

NAIL HOLE REAMERS

For bias tires





ASCOT NO.	MFG. NO.	DESCRIPTION
538-62600	RH626	1/4" x 3" NHR, 1/4" Shaft, Coarse (SSG 330)

ROTARY KNIFE BLADES

• Cuts and textures ends of pre-cured tread • Fits popular tread builders • Long-Lasting!











ASCOT NO.	MFG. NO.	DESCRIPTION
538-10134	RH100-GEG-134	6" x 1-3/4", 150 Grit *Salisbury + Oliver
538-10135	RH100-GEG-134-80	6" x 1-3/4", 80 Grit *Salisbury + Oliver
538-10013	RH100-GEG-138	6" x 1-3/8", 150 Grit *Cahill
538-10014	RH100-GEG-138-80	6" x 1-3/8", 80 Grit *Cahill
538-10020	RH100-GEG-200	6" x 2", 150 Grit *Bandag 5110, All Matuzzi
538-10021	RH100-GEG-200-80	6" x 2", 80 Grit *Bandag 5110, All Matuzzi

RETREADING SIDEWALL WHEELS

• Designed for shoulder and sidewall preparation • Used on manual or automatic sidewall buffers • Fast and effective removal of oxidized rubber • Used with or without traditional wire brushes • Excellent durability, reducing your cost per buff • Provides a uniform texture maximizing rubber-to-rubber bond







538-70800

ASCOT NO.	MFG. NO.	DESCRIPTION
538-12900	RH129	4" Buffing Cup, 3/4" Arbor Hole, Coarse (SSG 390) *Bandag pre-8400 series
538-70750	RH707-50	6" x 50mm Donut Wheel, Very Coarse (SSG 460)
538-70800	RH708	6" x 1" x 1-1/2" Donut Wheel, Coarse (SSG 390)
538-70850	RH708-50	6" x 50mm Donut Wheel, Coarse (SSG 390)









CONTOUR WHEELS





CONTOUR WHEELS

711		7	ΕII
5	+	٥,	כ.

B&J HORNET CARBIDES

THE NEXT GENERATION OF CARBIDE TECHNOLOGY

B&J Hornet Carbides feature longlasting cutting teeth arranged into a unique open pattern providing a uniform surface texture for a safer bond. B&J Hornet Carbides are available in many shapes, sizes and textures.

GRIT CROSS- REFERENCE	GRIT SIZE	
R=RED	50	FINE
O=ORANGE	70	A
Y=YELLOW	90	
G=GREEN	100	
B=BLUE	125	₩
P=PURPLE	132	SUPER COARSE
		▼ SUPER COARSE

70

125

90

132



UNIT WHEELS

3" + 4"



UNIT WHEELS EUROPE

3" + 4"



SMALL + MEDIUM CONES

5/8" + 7/8"



ROUND BALLS

1" + 1.25"



GRIT CHART KEY

50

100



BUFFOUT WHEELS





PENCIL RASP

0.25" x 2"



APPLICATION GUIDE

DUALIFE® KNOT TYPE WIRE WHEEL **BRUSHES-STANDARD TWIST**

ASCOT NO.	MFG. NO.	DIA.	WIRE SIZE	RPM	ARBOR HOLE
535-08014	08014	3"	.014"	25,000	1/2"-3/8"
535-08034	08034	4"	.0118"	20,000	1/2"-3/8"
535-08044	08044	4"	.014"	20,000	1/2"-3/8"
535-08075	08075	6"	.0118"	9,000	5/8"-1/2"
535-08085	08085	6"	.014"	9,000	5/8"-1/2"



POWER BRUSHES

POWER & HAND TUBE BRUSHES



ASCOT NO.	MFG. NO.	DESCRIPTION
535-13533	13533	Standard Twist Tire Wheel
535-70179	70179	3" Brush

COPPER CENTER® WIRE WHEEL BRUSHES (WIRE FILL)

ASCOT NO.	MFG. NO.	DIA.	WIRE SIZE	RPM	ARBOR HOLE
535-15322	15322	1-1/2"	.0104"	20,000	3/8"
535-15443	15443	2"	.008"	20,000	1/2"
535-15463	15463	2"	.0118"	20,000	1/2"-3/8"
535-15533	15533	3"	.006"	20,000	1/2"-3/8"
535-15543	15543	3"	.008"	20,000	1/2"-3/8"
535-15563	15563	3"	.0118"	20,000	1/2"-3/8"



535-15443

POLYFLEX® ENCAPSULATED WHEELS-BURGUNDY **ELASTOMER (STANDARD)**

ASCOT NO.	MFG. NO.	DIA.	WIRE SIZE	RPM	ARBOR HOLE
535-35070	35070	2"	.014"	20,000	1/2"
535-35240	35240	2"	.0104"	20,000	1/2"
535-35250	35250	3"	.0118"	20,000	1/2"



535-35240

ace	The state of the s
All the second	535-21072

ASCOT NO.	MFG. NO.	DESCRIPTION
535-21072	21072	1/4" Diameter, Wire Size: .004", OAL 3-1/2"
535-21073	21073	3/8" Dia, .004", OAL 3-1/2"
535-21074	21074	1/2" Diameter, Wire Size: .005", OAL 3-1/2"
535-21076	21076	3/4" Diameter, Wire Size: .006", OAL 3-1/2"

KNOTTED END AND POWER BRUSHES

• Features a hollow end and heavy duty brushing action with some flexibility • Ideal for more demanding cleaning applications in recessed areas





535-14177



535-14178



ASCOT NO.	MFG. NO.	STYLE	SIZE	ARBOR	FILL WIRE	WIRE DIA.	TRIM LENGTH	RPM
535-14174	14174	Single Row Knotted Wire Cup Brush	3-1/2"	5/8"-11NC	Steel	0.023"	7/8"	13,000
535-14177	14177	Single Row Knotted Wire Cup Brush	3-1/2"	3/8"-24UNF	Steel	0.023"	7/8"	13,000
535-14178	14178	Knotted End Brush	1-1/8"	1/4" Shank	Steel	0.014"	1-1/8"	20,000
535-14185	14185	Knotted End Brush	1-1/8"	1/4" Shank	Steel	0.020"	7/8"	22,000





3" - 10" POWER BRUSHES

• Provide heavy duty brushing action with some flexibility • Ideal for demanding cleaning applications on somewhat irregular surfaces



535-14165



535-14170















535-14173

535-14175

535-14176 535-14179

535-14182


ASCOT NO.	MFG. NO.	STYLE	SIZE	WIDTH/FACE	ARBOR	FILL WIRE	WIRE DIA.	TRIM LENGTH	RPM
535-14165	14165	Twist Knot	3"	3/8"	1/2"-3/8"	Steel	0.014"	5/8"	25,000
535-14170	14170	Mounted Knot	3-1/4"	3/8"	1/4" Shank	Steel	0.014"	5/8"	25,000
535-14171	14171	Twist Knot	4"	1/2"	1/2"-3/8"	Steel	0.0118"	7/8"	25,000
535-14172	14172	Twist Knot	4"	1/2"	1/2"-3/8"	Steel	0.014"	7/8"	25,000
535-14173	14173	Twist Knot	4"	1/2"	5/8"-11	Steel	0.020"	7/8"	25,000
535-14175	14175	Twist Knot	4"	1/2"	1/2"-3/8"	Steel	0.020"	7/8"	25,000
535-14176	14176	Cable Twist Knot	4"	1/4"	1/2"-3/8"	Steel	0.020"	7/8"	25,000
535-14179	14179	Cable Twist Knot	10"	1-3/4"	2"	Steel	0.023"	1-3/4"	4,500
535-14182	17682	Mounted Knot	3-1/4"	3/8"	1/4" Shank	Steel	0.020"	5/8"	25,000

BLOW/ VACUUM FUNCTIONS RPG RPG AIR POWERED TIRE REPAIR VACUUM • Quick change from blow to vacuum function • KIT INCLUDES: Plastic body gun, dust bag, 2 537-00003 extension tubes, shop brush, flat tube, tiny tube ASCOT NO. MFG. NO. DESCRIPTION 537-00003 VBG2 RPG Air Powered Tire Repair Vacuum







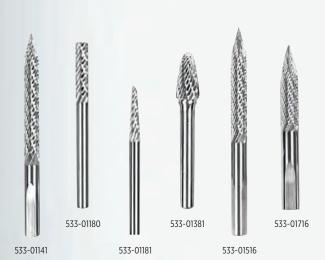

ASCOT NO.	MFG. NO.	DESCRIPTION
533-00003	CB3	1/8" (3mm) Pointed End
533-00010	CB10	3/8"(10mm) Pointed End
533-00012	CB12	1/2" (12mm) Pointed End
533-00045	CB4.5	1/8" (4.5mm) Pointed End
533-01120	BU12B	1/2" Ball Burr
533-01140	BU14R	1/4" Router Burr
533-01141	BU14TR	1/4" Long Taper Burr
533-01180	BU18R	1/8" Router Burr
533-01181	BU18T	1/8" Taper Burr
533-01182	BU18TL	1/8" Taper Burr, 3" Overall Length
533-01381	BU38T	3/8" Tree Burr
533-01516	BU516NR	5/16" Long Taper Burr
533-01716	BU716N	7/16" Long Taper Burr
533-01732	BU732N	7/32" Long Taper Burr

BUFFING STONES FOR STEELBELTED TIRES





ASCOT NO.	MFG. NO.	DESCRIPTION
534-80001	A-1	Large Cone - 3/4" Stone Diameter
534-80005	A-5	Small Cone - 3/4" Stone Diameter
534-80011	A-1B	Large Cone 3/4" Stone Diameter (Brown)
534-80015	A-15	Pencil Point - 1/4" Stone Diameter
534-80024	A-24	Round Head Pencil - 1/4" Stone Diameter
534-80036	A-36	Stone Disc - 1-3/4" Diameter
534-80037	A-37	Stone Disc - 1-1/4" Stone Diameter
534-80115	A-15B	Pencil Point - 1/4" Stone Diameter-Brown
534-80136	A-36B	Stone Disc - 1-3/4" Diameter -Brown
534-80137	A-37B	Stone Disc - 1-1/4" Diameter-Brown
534-81115	A-15SS	Pencil Point 1/4" Stone Diameter, Stainless Steel Shank

BUFFING WHEEL

• For use on tires or tubes • Coarse grit, round nose • Tungsten carbide

ASCOT NO.	MFG. NO.	DESCRIPTION
539-10001	BC-1	Buffing Wheel, 2-1/2" diameter









CHANNELLOCK PLIERS

- 100% MADE IN USA
- LASER heat-treated cutting edges perform better and last longer
- FORGED high carbon U.S. steel for maximum strength and durability is specially coated for ultimate rust prevention
- CHANNELLOCK BLUE® grips for comfort



ASCOT NO.	MFG. NO.	DESCRIPTION
319-00337	337	7" High Leverage Diagonal Cutting Plier
319-00357	357	7" End Cutting Plier
319-00358	358	8" End Cutting Plier
319-00436	436	6" Diagonal Cutting Plier, Box Joint
319-00526	526	6" Slip Joint Plier, Wire Cutting Shear

STITCHERS

• Corrugated ball bearing stitcher with hardened steel wheel and varnished wooden handle



ASCOT NO.	MFG. NO.	DESCRIPTION
536-00001	CS-1	1-1/2" x 1/16" Corrugated Stitcher
536-01121	VT-1121A	1.5" x 1/16" Economy Ball-Bearing Stitcher
536-01122	VT-1121B	1.5" x 1/8" Economy Ball-Bearing Stitcher
536-02040	MR02040	2" x 2" Flat Roller
536-02890	MR02890	2" x 1/16" Corrugated Stitcher
536-02910	MRO2910	2" x 1/4" Corrugated Stitcher
536-06500	MR06500	2" x 2" Porcupine Roller

GOOSENECK STITCHER

• Ideal repair tool for trucks, cars and motorcycles • Durable and ergonomic handle to reduce user fatigue



ASCOT NO.	MFG. NO.	DESCRIPTION
536-00101	NS-TS01	1.5" x 1/8" Gooseneck Stitcher





TUBELESS TIRE INSERT KIT

• For use on the wheel • Designed for emergency repairs • Fast and easy application • Made in the USA by Western States/Elgi





PARTS INCLUDED

1 HD chrome T-Handle slot eye inserter w/ replaceable needle

1 HD chrome T-Handle spiral probe w/ replaceable probe

PARTS INCLUDED

60 brown string inserts

1 plug lubricant

1 razor knife



518-90060

ASCOT NO. MFG. NO. DESCRIPTION
518-90060 ATS60K Tubeless Tire Insert Kit

TIRE PROBE AWL • Used to inspect injuries

• Used to inspect injuries in tires and to remove small stones and debris





ASCOT NO. MFG. NO. DESCRIPTION
537-00001 AWL-1 Black Handle Awl

INNERLINER SCRAPER

- This tool is a must for professional tire repairs
- Eliminates power buffing on many tire repairs
- Scraper removes material that might contaminate buffing wheels, ensuring a better repair every time





ASCOT NO. MFG. NO. DESCRIPTION

537-00004 S-4 Black Handle Innerliner Scraper

BLACK HANDLED TIRE DENAILER

• Recessed tip to allow nails or other puncturing objects to be pushed back through the tire • MADE IN THE USA





ASCOT NO.	MFG.	BLADE	RECESS	POINT	OVERALL
	NO.	LENGTH	DEPTH	DIAMETER	LENGTH
537-00353	353	7"	1/8"	5/16"	6-1/2"

TIRE REPAIR TOOL POUCH

• Durable nylon pouch • 3-color tread depth gauge • 5-50 psi pencil gauge • Valve core tool • White crayon • Ink pen

DURABLE NYLON POUCH

ASCOT NO. MFG. NO. DESCRIPTION
736-10004 | TTP | Tire Repair Tool Pouch



736-10004





XLIGHT TIRE SERVICE LED WORK LIGHT

• Designed for hands-free lighting during tire service and other work applications • 14" adjustable spring-tube for optimum light positioning within tight spaces • 2-stage compact high-power LED light provides 125 & 250 lumen output • Multiple highpower magnets on the handle and light-head attract easily to most metal surfaces

• Lithium-ion rechargeable battery • Compatible with all passenger, light truck and commercial truck tires • Compatible with all tire spreaders

ASCOT NO. DESCRIPTION MEG NO

312-14923 14-923 XLight Tire Service LED Work Light

LED WORK LAMP ASSEMBLY

• LED worklamp for tire spreaders • Directional spotlight for increased visability • 8W COB LED will provide 650 Lumens, 750 Lux at 1M • Stays cool to the touch • Heavy duty LED lens • Swivel head • Stays cool to the touch • Adjustable, flexible gooseneck • Includes mounting bracket

DESCRIPTION ASCOT NO. MFG. NO.

312-08473 TR8473 LED Work Lamp Assembly



HEAD LIGHT WITH RECHARGEABLE BATTERY

• Hands-free, versatile and comfortable with adjustable straps • MATERIAL: Aluminum +ABS+PC • LED: 1-piece high power CREE T6 bulb • BRIGHTNESS: Approx. 500LM for high mode • 4-MODE LED LAMPS: High - Low - Strobe - off • WORKING TIME: Approx. 6 hours on High; Approx. 12 hours on Low • CHARGING TIME: Approx. 5 hours • RECHARGEABLE BATTERIES: 2x 3.7V 1800mAh Li-ion batteries (3600mAh total battery capacity) • Sensor Function • USB cable included

MFG. NO. DESCRIPTION ASCOT NO.

THL2019 CREE Head Light with Rechargeable Battery 312-03120

TIRE SERVICE LED WORK LIGHT & REPLACEMENT LAMP HEAD

• 1-piece 3W high power LED • Three convenient switch modes so that you can operate at the power you need: High - Low - Off • Working time of approx. 3 hours • Charging time of approx. 3 hours • Brightness of approx. 200LM for High & 80LM for Low • Magnet on lamp body and head • Charging indicator on lamp head • Detachable head with quick-clip mounting to body • Smart clamp design for 9mm-32mm distance • MULTI USE - Clamping, magnetic, hand-held • Battery: Customized 3.7V 900mAh rechargeable polymer battery • INCLUDED: 5V 0.6A (UL) adapter + USB cable

ASCOT NO.	MFG. NO.	DESCRIPTION
312-04146	TWL3035	Tire Service LED Light w/ USB Adapter
312-04147	TWL3035H	Replacement Lamp Head for Tire Service Light





Tire Spreaders & Repair Stations

MTP, Inc.

HEAVY DUTY TUBELESS TRUCK TUBE/TIRE DUNKERS

- Space saving design requires 40% less space • New design fits in left or right corners • Entire rim and tire are checked for air leaks simultaneously • ONE MAN OPERATION: Safe and easy to operate, no lifting • 360° TURN IN WATER: Easy and fast inspection · Uni-quick ratchet type adapter adjusts
- from 15" dia. to 52" dia.and instantly lifts up to 400 lb. RVs to super singles • Optional inner tube adapter allows you to check tubes up to 50" in diameter









ASCOT NO.	MFG. NO.	DESCRIPTION
517-00100	100TTD	E-Z Dunk Truck Tire Dunker, Range 15" - 50" Diameter
517-00039	39ED	39" Dia. x 24" Depth Passenger & RV Tube & Tire Dunker with Polyethylene Tank
517-00055	55T	T & G 55" Dia. x 24" Depth Truck & Grader Tube Dunker with Polyethylene Tank

EZ-110D TRUCK TIRE DUNKER W/LIFT

- One man operation Picks up tire in and out of water • Adapter for 8 - 10 hole wheels • 55" x 24" Poly tub • Optional Inner tube/tire spider available
- Submerges entire tire under water
- Can rotate under water for easy marking



ASCOT NO.	MFG. NO.	DESCRIPTION	5
517-11033	EZ-110D	EZ-110D Truck Tire Dunker w/Lift	

Branick

ALL PURPOSE "EF" FULL CIRCLE TIRE SPREADER

• Expose tire defects immediately! • Bead Diameter minimum 13.5", maximum 25.5" • Cross Sections minimum 5", maximum 21.5" • Revolve the tire 360° for inspection, repair and buffing or installing tubes, flaps and air bags inside curing rims • Maximum operating pressure of 150 PSI • Air-operated lift raises tire to inspection position



602-60210 All Purpose Full Circle Tire Spreader

▲WARNING: For more information go to www.P65Warnings.ca.gov. SUPPLY CORPORAT

HEAVY DUTY "EF/HD" **FULL CIRCLE TIRE SPREADER**

· Designed to lift and spread truck, bus, tractor and some aircraft tires 14" thru 24", 20-ply, including steel radial tires • Revolves 360°, while spread, for easy excellent inspection • Conveniently located floor-mount controls · Diameter arms easily slide into position to hold inner beads before spreading

602-60211



INVERTING TIRE SPREADER/ REPAIR STATION

- Spreads and inverts passenger, truck and bus tires with ease for inspection and repair
- Foot control valve conveniently located at base of machine
- Adjustable lamp swings in and out of tire



ASCOT NO MFG. NO. DESCRIPTION

604-05120 5120 Inverting Tire Spreader/Repair Station

ASCOT NO.

MFG. NO.

DESCRIPTION

602-60211 EF-HD Heavy Duty Full Circle Tire Spreader

PASSENGER/ LIGHT TRUCK TIRE SPREADER

• Handles passenger and light truck tires up to 20" • Controlled tension release to avoid snap-back on tough sidewalls • Easily rotate the tire to locate the repair point • Quick and easy spread of tire and reduced footprint

ASCOT NO. MFG. NO. 604-05045 5045

DESCRIPTION



PASSENGER. LIGHT TRUCK AND COMMERCIAL TRUCK TIRE SPREADER

 Handles everything from passenger to super-single truck tires • Adjustable height and a tire ramp • Lifts 35" off the ground • Manual rotation with a tool tray that swivels left and right



ASCOT NO. 604-05500

MFG. NO. 5500

DESCRIPTION

Passenger, Light Truck and Commercial Tire Spreader





Tire Spreaders & Repair Stations (cont.)

AIR OPERATED TIRE SPREADER



AUTOMATIC TRUCK TIRE SPREADER

• Air lift allows operator to lift without lifting the tire/wheel • Heavy gauge steel construction • Work light included

• Air regulator/lubricator included

FLOOR MOUNT ADJUSTABLE TIRE SPREADER

• Provides easy access for repairing passenger and light truck tires • The adjustable tire spreader can accommodate all tires from garden service through light truck • The Tire Spreader has a foot-control swivel, tilts, and is equipped with a tool tray and a floor stand base-plate



603-00825 BJ-S825 Automatic Truck Tire Spreader

MFG. NO.

ASCOT NO.

603-82511

737

604-01275

MFG. NO. 603-00275 BJ-S275 Air Operated Tire Spreader

DESCRIPTION

ASCOT NO.

ASCOT NO. MFG. NO. DESCRIPTION

AIR OPERATED TIRE SPREADER PARTS & ACCESSORIES		
603-40200	402	Cylinder
603-42400	424	Step Valve
603-43700	437	Working Light
603-44000	440	Transformer
603-44300	443	Power Line
603-44700	447	Oil-Water Separator
603-52000	520	Metal Speediness Tie-In
603-52800	528	Y-Windtight Ring
603-52900	529	O-Windtight Ring
603-53100	531	Dustproof Ring
603-53400	534	Safety Valve
603-53500	535	Silencer

603-82501 658 Handle Valve 603-82502 650 Air Regulator 603-82503 711 0-Ring 712 Washer 603-82504 603-82505 715 **Dustproof Seal** 603-82506 720 Right Angle Connector 603-82507 728 Middle Union 603-82508 730 Middle Union 603-82509 733 Straight Union 603-82510 736 Rubber O-Ring

DESCRIPTION

ASCOT NO. MFG. NO. **DESCRIPTION** 604-01275 BJ-275B Floor Mount Adjustable Tire Spreader

	ASCOT NO.	MFG. NO.	DESCRIPTION
FLOOR MOUNT ADJUSTABLE TIRE SPREADER PARTS & ACCESSORIES			
	604-10300	103	Spread Hook Set
	604-10900	109	Roller Sets
	604-11000	110	Spread Hook Set
	604-11900	119	Foot Board
	604-12700	127	Rubber Cover

Oil-Free Piston



ADJUSTABLE CENTER-POST TIRE SPREADER

• Easy to use • Durable • Adjustable from 0" to 10"



ASCOT NO.

DESCRIPTION

602-08028

Adjustable Center-Post Tire Spreader

MANUAL TIRE SPREADER

- Lightweight and easy to use
- Special locking pin for safety
- Made from durable materials
- · Locks both beads open for easy tire inspection and repair



ASCOT NO. 605-14191

MFG. NO. MS-1

DESCRIPTION Manual Tire Spreader

TIRE SPREADER



ASCOT NO. MFG. NO. 605-00101 GTS-01

DESCRIPTION Tire Spreader

MANUAL TIRE SPREADERS

- For large truck tires
- Used in pairs
- Spreads tires up to 17" span
- Spreading power of a car jack
- Heavy duty construction
- Weight: 4-1/4 Lbs.

605-31554

ASCOT NO. 605-31554

MFG. NO. T54

DESCRIPTION Manual Tire Spreader



Cabinets & Storage

HEAVY DUTY TIRE REPAIR CABINET

Features sliding storage drawers with rollers.

- SIZE: 19.6" x 10" x 26"
- 2 shelves inside (3 storage levels)
- · 2 tool hook sets on two inside doors
- 2 sliding storage drawers with rollers
- Switch-to-open handle
- · Optional shelf available
- WEIGHT: 36 lbs.

ASCOT NO.	MFG. NO.	DESCRIPTION
719-12001	TBG-WC12001	Heavy Duty Tire Repair Cabinet
719-12011	TBG-WC12001-01	Optional Shelf for Tire Repair Cabir



18-DRAWER METAL STORAGE CABINET

- CABINET SIZE: 33-3/4" (W) x 11-3/4" (D) x 10-3/4" (H)
- DRAWER SIZE: 4-7/8" (W) x 11-1/4" (D) x 2-3/4" (H)
- Modular drawer design for efficiency and organization
- Heavy-duty, welded steel construction provides strength and stability
- Drawers feature stoppers to prevent accidental pulling or spilling
- Full-width handles and easy glide runners
- · Shipped fully assembled and ready to use
- WEIGHT: 45 lbs.

DESCRIPTION ASCOT NO. MFG. NO.

719-00018 18D 18-Drawer Metal Storage Cabinet



32-BIN METAL STORAGE CABINET

- CABINET SIZE: 33-3/4" (W) x 8-1/2" (D) x 19-1/4" (H)
- DRAWER SIZE: 4" (W) x 8-3/8" (D) x 4-1/2" (H)
- Keeps your tools and accessories organized and accessible
- Heavy-duty, welded steel construction provides strength and stability
- Hemmed bin fronts for retaining parts
- Mounting holes located in the top and bottom
- Shipped fully assembled and ready to use
- WEIGHT: 37 lbs.

ASCOT NO. MFG. NO. DESCRIPTION

719-00032 32-Bin Metal Storage Cabinet

*Actual product appearance may vary







Rasp Blades & Spacers

Retread Accessories

Retread Consumables

Tire Appearance

Envelopes

Rasp Blades and Spacers

PINCOTT* STANDARD SERIES **BUFFING RASP BLADE SPACERS**

Progressive development of blades capable of higher rates of rubber removal and the use of more powerful and higher speed machines imposed increasingly severe temperature conditions on rasp blades, giving rise to the need for effective cooling to avoid loss of temper in the blade material.



Allows cross ventilation and cleaning of cut rubber through the rasps head



SINGLE SECTION 1/8", 5/32", 3/16"

ASCOT NO.	MFG. NO.	DESCRIPTION	
613-00414	R4S14DL	1/4" Double	
613-00418	R4S18SL	1/8" Single	
613-00438	R4S38DL	3/8" Double	
613-04316	R4S316SL	3/16" Single	
613-04516	R4S516DL	5/16" Double	
613-04532	R4S532SL	5/32" Single	
613-00514	R5S14DL	1/4" Double	
613-00518	R5S18SL	1/8" Single	
613-00538	R5S38DL	3/8" Double	
613-53165	R5S316SL	3/16" Single	
613-00614	R6S14DL	1/4" Double	
613-00618	R6S18SL	1/8" Single	
613-00638	R6S38DL	3/8" Double	
613-06316	R6S316SL	3/16" Single	
613-06516	R6S516DL	5/16" Double	
613-06532	R6S532SL	5/32" Single	

SPACERS FOR 11.5" 5-SEGMENT


SPACERS FOR 11.5" 6-SEGMENT

Available for contoured hubs

PINCOTT® RASP BLADES - STANDARD SERIES

- Exclusive heat treating process
- Reduced tooth breakage
- Cooler running Faster material removal • No blade warpage
- · Lower cost per buffed tire




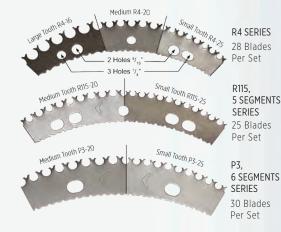

ASCOT NO.	MFG. NO.	DESCRIPTION
616-00320	PTP3-20	Fits 11.5" 6-Segment Hubs
616-00325	PTP3-25	Fits 11.5" 6-Segment Hubs
616-00416	PTR4 -16	Fits 9" 4-Segment Hubs
616-00420	PTR4-20	Fits 9" 4-Segment Hubs
616-00425	PTR4-25	Fits 9" 4-Segment Hubs
616-11520	PTR115-20	Fits 11.5" 5-Segment Hubs
616-11525	PTR115-25	Fist 11.5" 5-Seament Hubs

*Other sizes available for contoured hubs and use with smart blades

PINCOTT® RASP BLADES - ULTRA SERIES

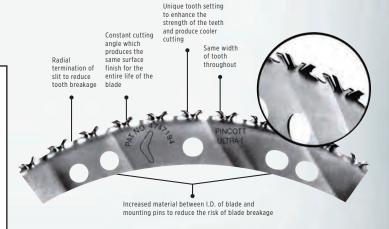

ASCOT NO.	MFG. NO.	DESCRIPTION
616-00111	Ultra I	Fits All 11.5", 5-Segmented Hubs
616-00222	Ultra II	Fits All 9", 4-Segmented Hubs
616-00333	Ultra III	Fits All 11.5", 6-Segmented Hubs

HOW TO ORDER BUFFING HUBS

Model/Make of Buffer



Keyway Size, if any

Pin Length

Rasp Blade Type

Hub Type: Non-Spiral. Heavy-Duty, All Purpose or Regular



Saturn hub pictured in Bandag setup with 20 each R4S38DL and 4 each R4S316SL



613-12900



PINCOTT® RASP BLADES - SMART SERIES

• Manufactured with a unique sinusodial (wave-like) form which introduces a multidirectional cutting action • Wave-like form creates greater strength in the blade and its teeth • Cutting action produces less drag on the rasp motor, saving you energy



ASCOT NO.	MFG. NO.	DESCRIPTION
616-01155	Smart I	Fits all 11.5", 5-Segmented Hubs
616-00944	Smart II	Fits all 9", 4-Segmented Hubs
616-01156	Smart III	Fits all 11 5" 6-Segmented Hubs



EAGLE II BUFFING BLADES

• Fast cutting and long lasting rasps for the best texture in all tire buffing operations • Tested under all conditions with outstanding results



ASCOT NO.	MFG. NO.	DESCRIPTION	BLADES PER SET
616-11275	121181	Eagle II Refill	Eagle II refills 28 per set

BUFFING BLADES

• Proven to be the fastest cutting, longest lasting rasps with the best texture for all buffing operations • Can be used in existing Saturn II or R4 hub assemblies • Fast cutting, long life. Same texture from start to finish • QUANTITY: 30 sets per box

ASCOT NO.	MFG. NO.	DESCRIPTION	TYPE	BLADES PER SET
616-43912	111136	Apollo II	Refill	28
616-43914	111137	Apollo III	Refill	30
616-43920	111140	S115-25	Refill	30
616-43921	111141	S115-20	Refill	30
616-11116	111116	R-4-25	Refill	28
616-01420	111119	R-4-20	Refill	28
616-11521	111107	R-115-20	Refill	25
616-21525	111104	R-115-25	Refill	25
616-43928	121177	Patriot II	Refill	28
616-43940	111172	Gemini II/SII	Refill	28
616-11173	111173	Gemini II/R4	Refill	28



HUB FOR EAGLE II

• Eagle II for use on most Bandag buffers

ASCOT NO.	MFG. NO.	DESCRIPTION	"THE PROPERTY OF
613-12900	111031	Eagle II 9" Dia., 4" W	/., 1-1/2" Arbor

TURBO HOLE APPLICATION

• B & J Rasps can be ordered with Turbo cooling channels producing a significant increase in cooling effect and blade performance. These can be retrofitted to all existing B & J rasps.





616-11400

HAND RESHARPENING STONE

• Used to hone the inside and outside of curved surfaces • Wooden Handle



534-80057

ASCOT NO.	MFG. NO.	DESCRIPTION
534-80057	819206	Hand Resharpening Stone



REPLACEMENT PINS FOR ROCKET HUBS

• Special convex style hubs used on buffers must be returned to factory for pin replacement



ASCOT NO.	MFG. NO.	DIA.	LENGTH	ASCOT NO.	MFG. NO.	DIA.	LENGTH
613-43934	111207	5/16"	2-1/2"	613-43944	111208	5/16"	5-3/4"
613-43935	111207	5/16"	3"	613-43945	111208	5/16"	6"
613-43936	111207	5/16"	3-1/8"	613-43946	111208	5/16"	6-1/2"
613-43937	111207	5/16"	3-1/4"	613-43831	111208	5/16"	8"
613-43938	111207	5/16"	3-3/8"	613-43813	111203	1/4"	3"
613-43939	111207	5/16"	3-1/2"	613-43812	111203	1/4"	3-3/8"
613-43940	111205	5/16"	3-3/4"	613-43897	111201	1/4"	3-3/4"
613-43941	111206	5/16"	4"	613-43814	111202	1/4"	4"
613-43924	111208	5/16"	4-1/2"	613-43811	111204	1/4"	6"
613-43943	111208	5/16"	5"	613-43815	111204	1/4"	8"



Rasp Blades and Spacers (cont.)

REPLACEMENT PINS & SPACERS FOR ROCKET HUBS

MFG. NO.	DESCRIPTION
	R-115 STYLE
111205	5/16" Pins / 3-3/4" Long
111206	5/16" Pins / 4" Long
111207	5/16" Pins / 3-3/8" Long
111301	Aluminum I-Beam 3/8" Spacer
111302	Aluminum I-Beam 1/4" Spacer
111303	Aluminum I-Beam 3/16" Spacer
111304	R-115 Aircooled Spacer 3/8"
111305	R-115 Aircooled Spacer 1/4"
SA	TURN II STYLE
111328	Aluminum I-Beam 3/8" Spacer
111329	Aluminum I-Beam 1/4" Spacer
111330	Aluminum I-Beam 3/16" Spacer
111205	5/16" Pins / 3-3/4" Long
111206	5/16" Pins / 4" Long
111207	5/16" Pins / 3-3/8" Long
SA	TURN III STYLE
111205	5/16" Pins / 3-3/4" Long
111206	5/16" Pins / 4" Long
111207	5/16" Pins / 3-3/8" Long
111341	Aluminum I-Beam 3/8" Spacer
111342	Aluminum I-Beam 1/4" Spacer
111343	Aluminum I-Beam 3/16" Spacer
111346	Saturn III Aircooled Spacer 3/8"
111347	Saturn III Aircooled Spacer 1/4"
	111205 111206 111207 111301 111302 111303 111304 111305 SA 111328 111329 111330 111205 111206 111207 SA 111205 111206 111207 111341 111342 111346



	E.	AGLE I STYLE
613-11380	111380	Aluminum I-Beam 3/8" Spacer
613-11381	111381	Aluminum I-Beam 1/4" Spacer
613-11382	111382	Aluminum I-Beam 3/16" Spacer
613-11205	111205	5/16" Pins / 3-3/4" Long
613-11206	111206	5/16" Pins / 4" Long
	E/	AGLE II STYLE
613-11383	111383	Aluminum I-Beam 3/8" Spacer
613-11384	111384	Aluminum I-Beam 1/4" Spacer
613-11385	111385	Aluminum I-Beam 3/16" Spacer
613-11205	111205	5/16" Pins / 3-3/4" Long
613-11206	111206	5/16" Pins / 4" Long
		R4 STYLE
613-11201	111201	1/4" Pins / 3-3/4" Long
613-11202	111202	1/4" Pins / 4" Long
613-11310	111310	Aluminum I-Beam 3/8" Spacer
613-11311	111311	Aluminum I-Beam 1/4" Spacer
613-11312	111312	Aluminum I-Beam 3/16" Spacer
616-11313	111313	R4 Aircooled Spacer 3/8"
616-11314	111314	R4 Aircooled Spacer 1/4 ¹ 616-11206

Note: For optimum performance replace spacers and pins as a set



To properly rebuild a Saturn II rasp hub order the following components:

QTY.	MFG. NO.	DESCRIPTION
8	111205	5/16" x 3-3/4" Pins
20	111328	3/8" I-Beam Spacers
4	111330	3/16" I-Beam Spacers

PINS FOR EAGLE II HUBS

ASCOT NO. MFG. NO. DESCRIPTION

613-11206 111206 Eagle II Long Pins 5/16"

SATURN II STYLE AIR COOLED SPACER

ASCOT NO. MFG. NO. DESCRIPTION

616-11365 111365 Saturn II Aircooled Aluminum Spacer 3/8" - 2

Pinholes for Saturn II US Domestic Rasp

B&JOUTER SUPPORT SPACERS

ASCOT NO. MFG. NO.

613-11391 111391 Saturn II Outer Support Spacers (Box of 8)

REPLACEMENT SPACERS FOR EAGLE II HUBS

ASCOT NO.	MFG. NO.	DESCRIPTION	WIDTH
613-11383	111383	Eagle II Spacer (Standard)	3/8"
613-11384	111384	Eagle II Spacer	1/4"
613-11385	111385	Eagle II Spacer	3/16"







616-11391





BUYER'S GUIDE ASCOT SUPPLY CORPORATION



ROCKET RASP ROTARY GOUGES



616-11605



616-11612

ASCOT NO.	MFG. NO.	DESCRIPTION
616-11603	810603	1-1/4" Dia. Mini No Notch 3/8" 24 THD (3/Set)
616-11604	810604	1-1/4" Dia. Mini No Notch 3/8" AH (3/Set)
616-11605	810605	2" Dia. Heavy Wall No Notch 1/2" AH
616-11606	810606	2" Dia. Heavy Wall No Notch 1/2" AH
616-11610	810610	2" Dia. Thin Wall No Notch 3/8" AH (2/Set)
616-11612	810612	2" Dia. Thin Wall Notched 3/8" AH (2/Set)
616-16101	810610-1	2" Dia. Thin Wall No Notch 1/2" AH (2/Set)
616-16102	810610-2	2" Dia. Thin Wall No Notch 3/8" 24 THD (2/Set)
616-16121	810612-1	2" Dia. Thin Wall Notched 1/2" AH (2/Set)
616-16122	810612-2	2" Dia. Thin Wall Notched 3/8" 24 THD (2/Set)

B&JROCKET SQUIGGLY RASP

• Fast Rubber Removal • No scorching • Easy Control • Long life • No regritting costs



ASCOT NO.	MFG. NO.	DESCRIPTION
616-82013	820103	10 Blades w/ Support Plate (10 per Pack)
616-02014	920104	24 Plados w/ Support Plato (24 por Pack)

MINI RASPS

• These Mini Rasps are very efficient when larger amounts of rubber have to be removed quickly, for example in the event of very large repairs they can drastically reduce the required buffout time • Both Mini Rasp versions are available individually or as complete, ready-to-use kits with adapters for use on quick change chucks



ASCOT NO.	MFG. NO.	DESCRIPTION
539-11075	111075	R-5 Rasp Complete (1 Set of R-5 Refills, 6 Alu Washer, NV 11 Adapter R-5)
539-11134	111134	R-5 Refills (1 Set of 5 Pieces)
539-11076	111076	R-6 Rasp Complete (1 Set of R-6 Refills, 7 Alu Washers, NV 11 Adapter R-6)
539-11133	111133	R-6 Refills (1 Set of 6 Pieces)



PINCOTT® ROTARY GOUGES

ASCOT NO.	MFG. NO.	DESCRIPTION
613-91501	901501	2" Dia. Heavy Wall, 1/2" Arbor Hole (2 per Box)
613-91502	901502	2" Dia. Heavy Wall, 3/8"-24 Thread Arbor Hole (2 per Box)
613-91503	901503	2" Dia. Thin Wall, 3/8" Arbor Hole (2 per Box)
613-91321	901321	1-1/4" Dia. Heavy Wall, 3/8"-24 Thread Arbor Hole (3 per Box)
613-91322	901322	1-1/4" Dia. Thin Wall, 3/8" Arbor Hole (3 per Box)
613-91207	901207	3/4" Dia. Thin Wall, 3/8"-24 Thread Arbor Hole (4 per Box)

PINCOTT® MINI RASPS

ASCOT NO.	MFG. NO.	DESCRIPTION
539-00005	PTP5	P5 Refill (6 per Box)
539-00006	PTP6	P6 Refill (6 per Box)

Retread Accessories

PRECURE SHOP ACCESSORIES



ITEM NO.	DESCRIPTION
11081F	Duofast Air Stapler F1B-50-16
11139F	Bostitch Air Stapler 31, F1B-84-16
ED-508C-06	Duofast 1/4" Staples (5,000 per Box, 20 Boxes per Case)
ED-5018C-14	Duofast 9/16" Staples (5,000 per Box, 20 Boxes per Case)
ESBNK-4023-08	Bostitch 5/16" Staples (10,000 per Box, 20 Boxes per Case)
SBNK4023-12	Bostitch 1/2" Staples (10,000 per Box, 10 Boxes per Case)
	11081F 11139F ED-508C-06 ED-5018C-14 ESBNK-4023-08

Retread Accessories (cont.)

B BECK Beyond Fastening

PRECURE TREAD STAPLES

ASCOT NO.	MFG. NO.	DESCRIPTION
639-10800	11073F	Fasco Staple Gun F1B 80-16
639-02338	ESBNK402310	Bostitch 3/8" Staples (10,000 per Box, 20 Boxes per Case)
639-05010	ED5010C08	Duofast 5/16" Staples (5000 per Box, 20 Boxes per Case)
639-08008	EB8008	20ga Chisel Point 5/16" Staples - Fits Fasco, BeA (10,000 per Box, 24 Boxes per Case)
639-05012	ED5012C10	Duofast 3/8" Staples (5000 per Box, 20 Boxes per Case)



TEFLON HOSE ASSEMBLIES FOR PRECURE RETREADING SYSTEMS

- Teflon hose assemblies in any length are available for all precure tire retreading equipment including Bandag, Harrelson, Vulcan, etc. • Hoses are used inside the chamber for inflating the tire and evacuating the air from the envelope • Hoses are made of an innercore of extruded Teflon and covered with stainless steel braid reinforcement
- All hoses have permanent swage-type brass end fittings 1/4"-18 male pipe (NPT)

COUPLERS & PLUGS

ASCOT NO.	MFG. NO.	DESCRIPTION	
645-01000	1000	1/4" Bandag-Type Coupler	
645-00011	11E	Plug Tire Valve Stem Steel Fits 5/16"-32 Ft.	
645-03000	W-3000HT	High Temperature Washer for 1000 Above	
HA	NSEN SPECIAL C	OUPLER FOR PRESS TYPE MATRIX	
645-00321	B3HD21Y	Coupler (Brass)	
645-21192	B3K21192	Plug (Brass)	
	1/4" BANDAG	-TYPE COUPLERS/ADAPTERS	
645-00017	CST17B	Chamber Exhaust Coupler (Brass)	
645-00117	CPST17B	Chamber Envelope Adapter (Brass)	
645-02014	2014EPR	Thin Replacement O-ring	
645-02110	2110EPR	Wide Replacement O-ring	
PARKER		SPECIAL COUPLER MRT	
645-01604	BH1-60Y4FP	Coupler Vacuum Seal	
645-16171	BH1-61-711	MRT Coupler Adapter	
BAIRD STYLE COUPLERS AND A		COUPLERS AND ADAPTERS	
645-08476	874-6	Straight Thru With 90° Side Exhaust Coupler For Envelope Use	
645-00874	874	90° Hose Inlet Coupler For Tube	
645-00812	812	.302 Valve Steam Adapter	
645-00814	814	.482 Envelope Adapter	

Branick

NAILHOLE TESTER/SPREADER

- Electric variable speed rotation Quick change probe heads Hand and foot operated bi-directional rotation • Auto-stop flaw detection
- Visible spark at flaw location Four air tool ports and two 110V outlets
- Accurate flaw detection Uses standard 110V power Hand-operated spread and lift • Adjustable work height • Includes medium truck probe



ASCOT NO.	MFG. NO.	DESCRIPTION
606-57000	BTT-5700-S	Nailhole Tester/Spreader - Steel
606-57001	BTT-5700-SF	Nailhole Tester/Spreader - Steel/Fabric







645-00117





645-01000

645-16171

645-21192





645-08476





645-00321



	ASCOT NO.	MFG. NO.	DESCRIPTION
	651-32437	232-437	23:1 Cement Sprayer
	651-35462	235-462	Silver Airless Spray Gun Only
	651-63415	163-415	Silver Tip, .015" Orifice, 8-10" Fan Width

WYCO FLEXIBLE SHAFT MACHINES

• TYPICAL APPLICATIONS INCLUDE: Wood or metal finishing, rust or paint removal, auto body sanding, tire buffing, etc.



ASCOT NO.	MFG. NO.	CORE CASING & HAND PC. NO.	LENGTH (FEET)	CORE NO.	CASING	STRAIGHT HAND PC.
516-00491	49-1	10R	5	C-10	K-10	3500
516-00492	49-2	10R	5	C-10	K-10	3500
516-00493	49-3	2R	6	C-2	K-2	3500
516-00494	49-4	2R	6	C-2	K-2	3500
516-00495	49-5	30R	7	C-30	K-30	551
516-00496	49-6	30R	7	C-30	K-30	551
516-04914	49-14	4R	7	C-4	K-4	551



RETREAD BRUSHES

• Used for applying and stippling in cement

	ASCOT NO. 653-40082	MFG. NO.	DESCRIPTION
		40082	2" Diameter Stipple Brush



TACK BANDS FOR SMOOTH, FINE TEXTURE









539-80003 539-80002 539-80012

ASCOT NO.	MFG. NO.	DESCRIPTION
539-80002	H12	OX2R 2-1/2" OD x 1" W
539-80003	H11	OX3R 2-1/2" OD x 5/8" W
539-80012	OX2-R	2-1/2" OD x 1" W
539-80013	OX3-R	1-1/2" OD x 5/8" W

WHEEL ARBOR-ADAPTERS

- For grinding wheels or wire brushes
- 9/16"- 18 female thread to fit Wyco handpieces



ASCOT NO.	MFG. NO.	WHEEL WIDTH	MALE THREAD
FC	R GRINDING WI	HEELS AND OTHER A	CCESSORIES
516-00305	305	5/8"	3/8"-24
516-00405	405	1"	1/2"-20
516-00505	505	1-1/2"	1/2"-20
516-00605	605	1-1/2"	5/8"-18

	ASCOT NO.	MFG. NO.	DESCRIPTION
F		FOI	R ROTARY RASPS
	516-01305	305R	Threaded 3/8" (16 To Fit Rasps)
	516-01405	405R	Threaded 1/2" (13 To Fit Rasps)



Retread Accessories (cont.)

EXPANDABLE RIM ASSEMBLIES & REPLACEMENT BELTS

EXP. RIM ASSEMBLIES ASCOT NO.	EXP. RIM ASSEMBLIES MFG. NO.	RIM	BEAD WIDTH	REPL. BELTS ASCOT NO.	REPL. BELTS MFG. NO.
613-39020	309020	12-14"	5"	613-28260	309510
613-00436	309030	13-16"	6-3/8"	613-00660	309520
613-33379	309962	13-16"	7-1/2"	613-33382	309521
613-28081	309963	13-16"	11-3/8"	613-28160	309522
613-32769	309942	14-17"	6"	613-32773	309541
613-00937	309140	14-17"	7-1/8"	613-02701	309540
613-28313	309150	14-17"	9-1/4"	613-02821	309550
613-00938	309952	14-17"	11-3/8"	613-02702	309560
613-00465	309040	17-20"	6-1/2"	613-01653	309570
613-32774	309202	17-20"	8-1/4"	613-32778	309242
613-28271	309211	18-20"	7-5/8"	613-33717	309354
613-00470	309220	17-20"	13-1/4"	613-01332	309580
613-00674	309230	18-20"	16-3/8"	613-02092	309356

EXPANDABLE HUB REPLACEMENT STEMS



ASCOT NO.	MFG. NO.	DESCRIPTION
613-00512	900512	Garter Spring
613-09111	309111	4 Lock 8 Plain Stem Set
613-19111	30911L	12 All Lock Stem Set
613-29617	729617	Steel-Inserted Plain Stem
613-29618	729618	Steel-Inserted Plain Locking Stem

POLY EASE RETREAD RELEASE LINER

- American made perforated polypylene film is specified to soften at 311°F and melt at 328°F For low temp bonding chambers 75 Gauge
- Custom widths are also available High temp film available

ASCOT NO.	MFG. NO.	WIDTH	LENGTH	QTY./BOX	WEIGHT/ROLL
634-12027	PP12HD	12"	2700'	2	26 lb.
634-14027	PP14HD	14"	2700′	2	30 lb.
634-15027	PP15HD	15"	2700′	2	32 lb.
634-18027	PP18HD	18"	2700'	1	33 lb.



Expandable Hub Assembly

EXP. RIM ASSEMBLIES ASCOT NO.	EXP. RIM ASSEMBLIES MFG. NO.	RIM	BEAD WIDTH	REPL. BELTS ASCOT NO.	REPL. BELTS MFG. NO.
613-23800	309602	20-22.5"	8-1/4"	613-33092	309622
613-00466	309050	20-22.5"	9"	613-01715	309610
613-32822	309183	20-22.5"	11-3/4"	613-32826	309612
613-33162	309021	20-22.5"	14-1/2"	613-33007	309491
613-25718	309190	22-24.5"	7-1/2"	613-25839	309600
613-33093	309282	22-24.5"	8-1/4"	613-33094	309302
613-00846	309060	22-24.5"	9"	613-02533	309630
613-00467	309070	22-24.5"	13-3/8"	613-01955	309640
613-33564	309912	22-24.5"	14-1/2"	613-33568	309641
613-00839	309913	22-24.5"	18-1/2"	613-02516	309643
613-00699	309490	23-25"	13-3/8"	613-11955	309500
613-00705	309890	27-29"	14"	613-02184	309644

ENVELOPE SEALING RINGS*

Heavy duty Acme Threads • Sliding shield on outer body • Ergonomic



ASCOT NO. MFG. NO. DESCRIPTION
644-12345 | 644 | Envelope Sealer Rings

"Available Sizes: 14", 15", 16", 16.5", 17", 17.5", 19.5", 20", 22", 22.5", 24" & 24.5"



BANDAG SIDEWALL BUFFING CUP AND BRUSH

ASCOT NO.	MFG. NO.	DESCRIPTION
538-12900	RH129	4" Buffing Cup, 3/4" Arbor Hole, SSG 390
535-06020	6020	Wire Brush, .0118 Wire Size
535-03811	3811	2" to 3/4" Arbor Hole Adapter Plates





STRETCH WICKING PRODUCTS

• For use with valve-type envelopes • All 4-ply



ASCOT NO.	DESCRIPTION	QTY./BOX
634-00812	8" x 12" Stretch Wicking Pad	24
634-00815	8" x 15" Stretch Wicking Pad	24
634-00820	8" x 20" Stretch Wicking Pad	24
645-01812	WKMICH8X12 Michelin Wicking Pad	24
645-01815	WKMICH8X15 Michelin Wicking Pad	24



WOVEN ROLL WICKING

 For use with non-valve type processes • Full rolls only • Treated with a special release agent to prevent adhesion to the cushion gum



ASCOT NO.	DESCRIPTION	SIZE
634-05586	Woven Roll Wicking - Green	1-1/2" x 180'
634-05587	Woven Roll Wicking - Green	2" x 180'

RUBBER **WICKING PADS**

- High elasticity compound eliminating tread deformations
- · Eliminates use of venting poly underneath
- · Excellent thermal resistance, reducing aging for extended use



ASCOT NO. MFG. NO. 634-00115 DL01-15 55.50" x 6.75" DL03-15 48.75" x 6.75" 634-00315 15 634-00515 DL05-15 29" x 5" 15

Retread Consumables

JET CUSHION GUM

- Designed to line skived areas to improve adhesion • Available in multiple widths and thicknesses • Available in black or grey
- All sizes sold in approximately 25 lb. increments and priced by the pound

When ordering cushion gum please specify the curing temperature that you are curing at, the width and thickness of the cushion gum.

Please call for more details.

STRIPPING STOCK

- Stripping Stock curing temperatures 914, 074, 440 • Free flowing quality stock for stipping edges of tread rubber to cover excess buffed surfaces
- APPLICATIONS: Used on sidewalls to improve appearance • 25 lb. box
- Available at any gauge & width

Please call for more details.

JET ROPE RUBBER

- Rubber extruded is rope form
- Especially for mini-extruder guns
- APPLICATIONS: For filling buzzouts, section repairs, cuts & snags
- Available in 1/4" or 3/8" diameters
- All sizes sold in approximately 25 lb. increments and priced by the pound
 - Use RR074 for repairing with section mold or spotter: 250° - 280° (Regular cure)
- Use RR914 for hot or precure retreading: 250° - 320° (High temperature). Fast Cure
- Use RR440 for low temperature precure retreading: 200°-250°

Please call for more details.



in Stripping Stock

2" Stripping Stock



Retread Consumables (cont.)

JET RUBBER SOLVENT

- Pure Aliphatic Hydrocarbon Free from oils and impurities
- APPLICATIONS: For diluting or thinning heavy viscosity cements and tire paint; For cleaning buffed retread and repair surfaces; For freshening cushion gum and other uncured rubber stocks

ASCOT NO.	MFG. NO.	DESCRIPTION
633-50105	CI31-5GAL	5-Gallon Container
633-50154	CI31-54GAL	54-Gallon Container

JET BLACK VULCANIZING CEMENT

BRUSH TYPE: An excellent repair cement • Contains special additives to bond to exposed cords such as nylon, rayon, fiberglass, polyester & polyaramid • Use within 15 minutes on exposed steel for best adhesion • Superior tack and excellent cured adhesion

SPRAY TYPE: An all purpose cement for both hot capping and precure retreading

• Also used for repairing • High tack cement • Excellent cured adhesion
and provides superior bond and tack • Available in 32 oz. and 54 Gallon

ASCOT NO.	MFG. NO.	DESCRIPTION
633-83005	CH03-5GAL	5-Gallon Brush Cement
633-83015	CH00-5GAL	5-Gallon Spray Cement



SURE SHOT PRESSURE SPRAYERS

• Air pressurized and refillable • Environmentally safe, eliminates aerosol usage • For brake and parts cleaner, penetrating oils, lubricants, degreasers, solvents • MADE IN USA

ASCOT NO.	MFG. NO.	DESCRIPTION
632-00005	K-5	Partial Repair Kit for Model A Sure Shot Sprayers
632-00010	K-10	Complete Repair Kit for Model A Sure Shot Sprayers
632-01002	A1002	Sure Shot Black Enameled Steel Sprayer w/ Adjustable Nozzle
632-10001	A1000R	Sure Shot Enameled Steel Sprayer (Red)
632-02400	M2400S	Anodized Aluminum Sprayer

MOLD LUBRICANT (CONCENTRATED)

- Release molded retreads with ease and keep molds clean at the same time
- This non-flammable, odorless formula allows rubber to flow freely and prevents carbon buildup Produces a superior satin finish with no staining Economical concentrate may be diluted with up to 20 parts water to one part lubricant

ASCOT NO.	DESCRIPTION
647-24501	Mold Lubricant (1-Gallon)
647-24505	Mold Lubricant (5-Gallon)





647-24501

632-02400





ROBBINS ENVELOPE LUBE

• Spray on inside of the envelope, spray on while envelope is hot to dry faster, spray after first cure and then every 30 cures or as needed • Quart container is a convenient spray bottle • Ready to use, no dilution required

ASCOT NO.	MFG. NO.	DESCRIPTION		
647-05611	5611	Robbins Envelope Lube (1-Quart)		
647-05612	5612	Robbins Envelope Lube (1-Gallon)		
647-05613	5613	Robbins Envelope Lube (5-Gallon)		



647-05612 647-05611



NEW LOOK TIRE VENEER

• Premium water-based coating with excellent hiding power specifically for retread tires • Revolutionary design applies a matte, rubber veneer finish to the tire's sidewall • Covers and hides all chalk marks • Dries quickly, will not wash off in rain • Ready to use

ASCOT NO.	MFG. NO.	DESCRIPTION
497-84405	NL640	IMI New Look Tire Veneer - 5-Gal Pail
497-84406	NL55G	IMI New Look Tire Veneer - 55-Gal Drum



BLACK-OUT BLACK TIRE PAINT

• Ready to use water based black tire paint • Restores the original appearance of retreaded and used tires • Covers crayon marks, scuffs and dirt to give the tire a new fresh look • Works with machine or hand application • Compatible with tire painting machines

ASCOT NO.	MFG. NO.	DESCRIPTION
497-00005	Blackout-5	Black-Out Black Tire Paint (5-Gallon)
497-00055	Blackout-55	Black-Out Black Tire Paint (55-Gallon)

REMA SHINE

• Water-based • Excellent for interior plastic and vinyl trim • Deep long-lasting shine • Convenient, ready-to-use formula • Pleasant odor and VOC compliant

ASCOT NO.	MFG. NO.	DESCRIPTION
395-10100	101000110	REMA Shine

EXPANDABLE HUB LUBE

- Ready-To-Use formula Quick/easy application Petroleum/Silicone free
- No mess or product build-up on equipment 70+ tires per application

ASCOT NO.	MFG. NO.	DESCRIPTION
647-00032	EHL-32	Expandable Hub Lube (32 Oz. Spray Bottle)



497-00005





647-00032

Envelopes



Envelope Spreader Available. Call for Details.



ACCU FIT II/INNERLOPE INSIDE ENVELOPES

ASCOT NO.	MFG. NO.	OUTSIDE	TIRE SIZE
643-40001	40x8-24.5	4422	305/75R24.5 Deep Lug
643-40002	40x8-24.5	4223	305/75R24.5
643-40003	38x8-24.5	4224	285/75R24.5, 275/80R24.5
643-40004	42x8-24.5	4422	12R24.5
643-40005	42x8-24.5	4422	11R24.5
643-40006	44x10-24.5	4423	12.00R24
643-40007	42x10-24.5	4422	11.00R24
643-40008	42x10-22.5	4422	455/55R22.5
643-40009	44x12-22.5	4522	445/65R22.5 18R22.5
643-40010	40X8-22.5	4219	445/50R22.5, 315/80R22.5, 305/85R22.5
643-40011	44x10-22.5	4522	425/65R22.5 16R22.5
643-40012	42x10-22.5	4422	385/65R22.5 15R22.5
643-40013	38x8-22.5	4023	305/75R22.5, 305/70R22.5, 295/80R22.5, 295/75R22.5, 275/80R22.5
643-40014	35x8-22.5	3822	275/70R22.5, 265/75R22.5, 255/80R22.5, 255/70R22.5, 245/75R22.5, 235/80R22.5
643-40015	40x8-22.5	4224	12.75R22.5, 12R22.5, 10.00R22
643-40016	38x8-22.5	4224	11R22.5, 10R22.5
643-40017	35x8-22.5	3822	9R22.5
643-40018	42x8-22.5	4422	11.00R22

ASCOT NO.	MFG. NO.	OUTSIDE	TIRE SIZE
643-40019	42x10-20	4422	365/80R20
643-40020	42x8-20	4423	14/80R20
643-40021	44x12-20	4522	14.00R20
643-40022	40x8-20	4224	13/80R20, 11.00R20, 10.00R20
643-40023	42x10-20	4422	12.00R20
643-40024	38x8-20	4023	9.00R20
643-40025	35x8-20	3822	8.25R20
643-40026	35x8-19.5	3521	305/70R19.5
643-40027	32x8-19.5	3521	285/70R19.5, 265/70R19.5, 24570/R19.5
643-40028	29x7-19.5	3218	225/70R19.5
643-40029	29x7-19.5	3218	8R19.5
643-40030	29x7-17.5	3117	245/70R17.5, 215/75R17.5
643-40031	35x8-17.5	3822	11R17.5
643-40032	32x8-17.5	3521	10R17.5, 9.5R17.5, 9R17.5
643-40033	31x6-17.5	3218	7.50-17
643-40034	29x7-16	3218	245/75R16, 235/85R16, 215/85R16, 7.50R16
643-40035	27x5-16	2916	225/75R16
643-40036	10.00-15 HB	3521	10.00R15
643-40037	8.25-15 HB	3218	8.25R15



B&JENVELOPE TESTER

- Extremely Fast
- Detects the smallest leaks • Positive operation • Easy to install • Simple to use
- No maintenance required!



ASCOT NO. MFG. NO. 649-83340 833400

B & J Envelope Tester

ENVELOPE STORAGE CART

• Organize and store envelopes conveniently • Mobile, can be moved around the shop

wherever needed • Sturdy and easy to maneuver • Color-coded handle grips available to organize envelopes by size • Easy assembly • CART HEIGHT: 39.75" • BASE DIAMETER: 47.83" • LOAD CAPACITY: 1,000 lb.



ASCOT NO.

MFG. NO.

DESCRIPTION

649-40100 840100 Envelope Storage Cart



MEASUREMENT CONVERSIONS

Millimeter, Decimal & Fractional Inch Sizes



ММ	DECIMAL EQUIV.	FRACTION EQUIV.	MM	DECIMAL EQUIV.	FRACTION EQUIV.	MM	DECIMAL EQUIV.	FRACTION EQUIV.	MM	DECIMAL EQUIV.	FRACTION EQUIV.	ММ	DECIMAL EQUIV.	FRACTION EQUIV.
.10	.0039		1.70	.0670		3.90	.1540		6.60	.2610		11.00	.4330	
15	.0059		1.75	.0689		3.97	.1562	5/32"	6.70	.2638		11.11	.4375	7/16"
.20	.0079			.0700			.1570		6.75	.2656	17/64"	11.50	.4528	
.25	.0098		1.80	.0709		4.00	.1575		6.75	.2657		11.51	.4531	29/64"
30	.0118		1.85	.0728			.1590			.2660		11.91	.4687	15/32"
	.0135			.0730			.1610		6.80	.2677		12.00	.4724	/
35	.0138		1.90	.0748		4.10	.1614		6.90	.2716		12.30	.4843	31/64"
70	.0145	1/6 4"	1.05	.0760		4.20	.1654		7.00	.2720		12.50	.4921	1/2"
39	.0156	1/64"	1.95	.0767	F /C A!!	4.25	.1660		7.00	.2756		12.70	.5000	1/2"
40	.0157		1.98	.0781	5/64"	4.25	.1673		710	.2770		13.00	.5118	77 /C A!!
.45	.0160		2.00	.0785 .0787		4.30	.1693 .1695		7.10	.2795 .2811		13.10 13.49	.5156 .5312	33/64" 17/32"
.45	.0177		2.05	.0807		4.37	.1719	11/64"	7.14	.2812	9/32"	13.50	.5312	17/32
.50	.0197			.0810		4.37	.1730	11/04	7.14	.2835	3/32	13.89	.5469	35/64"
50	.0200			.0820		4.40	.1732		7.25	.2854		14.00	.5512	33/04
	.0210		2.10	.0827		-7.70	.1770		7.30	.2874		14.29	.5625	9/16"
.55	.0217		2.15	.0846		4.50	.1771		7.50	.2900		14.50	.5709	3710
55	.0225			.0860			.1800		7.40	.2913		14.68	.5781	37/64"
.60	.0236		2.20	.0866		4.50	.1771			.2950		15.00	.5906	,
	.0240		2.25	.0885			.1800		7.50	.2953		15.08	.5937	19/32"
	.0250			.0890		4.60	.1811		7.54	.2968	19/64"	15.48	.6094	39/64"
.65	.0256		2.30	.0905			.1820		7.60	.2992		15.50	.6102	
	.0260		2.35	.0925		4.70	.1850			.3020		15.88	.6250	5/8"
	.0280			.0935		4.75	.1870		7.70	.3031		16.00	.6299	
.70	.0276		2.38	.0937	3/32"	4.76	.1875	3/16"	7.75	.3051		16.27	.6406	41/64"
	.0292		2.40	.0945		4.80	.1890		7.80	.3071		16.50	.6496	
.75	.0295			.0960			.1910		7.90	.3110		16.67	.6562	21/32"
	.0310		2.45	.0964		4.90	.1929		7.94	.3125	5/16"	17.00	.6693	
79	.0312	1/32"		.0980			.1935		8.00	.3150		17.06	.6719	43/64"
80	.0315		2.50	.0984			.1960			.3160		17.46	.6875	11/16"
	.0320			.0995		5.00	.1968		8.10	.3189		17.50	.6890	45 /6 411
0.5	.0330		2.00	.1015		F 10	.1990		8.20	.3228		17.86	.7031	45/64"
85	.0335		2.60	.1024		5.10	.2008		8.25	.3230		18.00	.7087 .7187	27/72!!
.90	.0354		2.70	.1040		5.16	.2010	13/64"		.3248		18.26 18.50	.7283	23/32"
.90	.0360			.1065		5.10	.2040	13/04	8.30 8.33	.3261	21/64"	18.65	.7344	47/64"
	.0370		2.75	.1003		5.20	.2040		8.40	.3307	21/04	19.00	.7480	47/04
.95	.0374		2.78	.1002	7/64"	3.20	.2055			.3320		19.05	.7500	3/4"
55	.0380			.1100	7/04	5.25	.2067		8.50	.3346		19.45	.7656	49/64"
	.0390		2.80	.1102		5.30	.2086		8.60	.3386		19.50	.7677	13/01
1.00	.0394			.1110		5.40	.2126			.3390		19.84	.7812	25/32"
	.0400			.1130			.2126		8.70	.3425		20.00	.7874	
	.0410		2.90	.1141			.2130		8.73	.3437	11/32"	20.24	.7969	51/64"
1.05	.0413			.1160		5.50	.2165		8.75	.3445		21.00	.8268	
	.0420		3.0	.1181		5.56	.2187	7/32"	8.80	.3465		21.03	.8281	53/64"
	.0430			.1200		5.60	.2205			.3480		21.43	.8437	27/32"
1.10	.0433		3.10	.1220			.2210		8.90	.3504		21.50	.8465	
1.15	.0452		3.18	.1250	1/8"	5.70	.2244		9.00	.3543		21.83	.8594	55/64"
	.0465		3.20	.1260		5.75	.2263			.3580		22.00	.8661	
1.19	.0469	3/64"	3.25	.1279			.2280		9.40	.3701		22.23	.8750	7/8"
1.20	.0472			.1285		5.80	.2283		9.50	.3740		22.50	.8858	
1.25	.0492		3.30	.1299		5.90	.2323		9.53	.3750	3/8"	22.62	.8906	57/64"
1.30	.0512		3.40	.1338			.2340	45/64"		.3770	45 (0.41)	23.00	.9055	00/70"
1.75	.0520		7.50	.1360		5.95	.2344	15/64"	9.60	.3780	15/64"	23.02	.9062	29/32"
1.35	.0531		3.50	.1378		6.00	.2362		9.70	.3819		23.42	.9219	59/64"
1.40	.0550		7.57	.1405	0/64!!	C 10	.2380		9.75	.3838		23.50	.9252	15 /16 !!
1.40	.0551		3.57	.1406 .1417	9/64"	6.10	.2401		9.80	.3858		23.81 24.00	.9375 .9449	15/16"
1.45	.0570		3.00	.1417		6.20	.2441		9.90	.3906	25/64"	24.00	.9531	61/84"
1.50	.0595		3.70	.1440		6.25	.2441		10.00	.3937	23/04	24.21	.9646	01/04
1.55	.0610		3.70	.1437		6.30	.2480		10.00	.3970		24.50	.9687	31/32"
1.59	.0625	1/16"	3.75	.1476		6.35	.2500	1/4"		.4040		25.00	.9843	J1/ JL
1.60	.0629	1/10	3.73	.1476		6.40	.2520	1/ 7	10.32	.4062	13/32"	25.00	.9844	63/64"
	.0635		3.80	.1496		6.50	.2559		.5.52	.4130	.0,02	25.40	1.000	1"
1.65	.0649			.1520			.2570		10.50	.4134			25.40 = MM	
							-							
												mm x 0	.03937 = IN	rue?

// A //	
Agricultural Boots	9
Air Checking Stations	3
Air Chucks	
Air Chucks - Ball Foot276	ô
Air Chucks - Dual Foot276	ô
Air Chucks - Euro276	
Air Chucks - Lock-On276	ô
Air Compressor Parts & Accessories17	
Air Compressors	4
Air Drills)
Air Dryers	9
Air Gauges	
Air Hose Accessories	C
Air Hose - Replacements	
Air Hoses	
Air Line Inflators	
Air Ratchets	
Air Staplers 433	
Air Tanks	
Air Tank Accessories	
Air Tool Accessories	
Air Tool Filters	
Air Tool Lubricants & Conditioners71	
Air Tool Parts & Accessories - RPG54	4
Air Tools	ô
Air Tools - RPG56	ô
Alignment Equipment351	1
Alignment Tools)
Angle Connector	4
Anti-Seize Compound167	
Anti-Freeze Bibb	ğ
	8
// B //	
// B // Balancing Beads - ATV/UTV334	4
// B // Balancing Beads - ATV/UTV	4
// B // Balancing Beads - ATV/UTV	4 3 4
## B ## Balancing Beads - ATV/UTV	4 3 4
## B ## Balancing Beads - ATV/UTV	4 3 4 6 7
## B ## Balancing Beads - ATV/UTV	4 3 4 6 7 5
## B ## Balancing Beads - ATV/UTV	4 3 4 6 7 5 5
## B ## Balancing Beads - ATV/UTV	4 3 4 6 7 5 5
## B ## Balancing Beads - ATV/UTV	4 3 4 6 7 5 5 5 5
## B ## Balancing Beads - ATV/UTV	4 3 4 6 7 5 5 7 4
## B ## Balancing Beads - ATV/UTV	4 3 4 6 7 5 5 0 4 9
## B ## Balancing Beads - ATV/UTV	434675550499
## B ## Balancing Beads - ATV/UTV 334 Balancing Beads - Counteract 333 Balancing Beads - EcoBalance 334 Balancing Beads - EQUAL FLEXX 336 Balancing Beads - MAGNUM+ 337 Balancing Beads - Motorcycle 335 Batteries 65 Battery Chargers & Testers 355 Bead Breakers 170 Bead Breaking Tools 174 Bead Expanders 189 Bead Holders 189 Bead Holders 189 Bead Hooks 180	4346755504990
## B ## Balancing Beads - ATV/UTV	434675550499042
## B ## Balancing Beads - ATV/UTV 334 Balancing Beads - Counteract 333 Balancing Beads - EcoBalance 334 Balancing Beads - ECOBalance 334 Balancing Beads - EQUAL FLEXX 336 Balancing Beads - MAGNUM+ 337 Balancing Beads - Motorcycle 335 Batteries 65 Battery Chargers & Testers 355 Bead Breakers 170 Bead Breaking Tools 174 Bead Expanders 189 Bead Holders 189 Bead Holders 180 Bead Hooks 180 Bead Lever Tools 294	434675550499042
// B // Balancing Beads - ATV/UTV 334 Balancing Beads - Counteract 333 Balancing Beads - EcoBalance 334 Balancing Beads - MAGNUM+ 337 Balancing Beads - Motorcycle 335 Batteries 65 Battery Chargers & Testers 355 Bead Breakers 170 Bead Breaking Tools 174 Bead Expanders 189 Bead Holders 189 Bead Hooks 180 Bead Lever Tools 294 Bead Lock 192 Bead Push Tools 180 Bead Sealers 393	43467555049904203
## B ## Balancing Beads - ATV/UTV	43467555049904203
Balancing Beads - ATV/UTV	4346755504990420364
## B ## Balancing Beads - ATV/UTV	43467555049904203646
// B // Balancing Beads - ATV/UTV 334 Balancing Beads - Counteract 333 Balancing Beads - ECOBalance 334 Balancing Beads - EQUAL FLEXX 336 Balancing Beads - MAGNUM+ 337 Balancing Beads - Motorcycle 335 Batteries 65 Battery Chargers & Testers 355 Bead Breakers 170 Bead Breaking Tools 174 Bead Expanders 189 Bead Holders 189 Bead Hooks 180 Bead Lever Tools 294 Bead Lock 192 Bead Sealers 393 Bead Sealers 393 Bead Seater Upgrade Kits 186 Bead Seaters 184 Bead Seating Stands 186 Bench Grinders 359	434675550499042036469
# B // Balancing Beads - ATV/UTV 334 Balancing Beads - Counteract 333 Balancing Beads - EcoBalance 334 Balancing Beads - EQUAL FLEXX 336 Balancing Beads - MAGNUM+ 337 Balteries 65 Batteries 65 Battery Chargers & Testers 355 Bead Breakers 170 Bead Breaking Tools 174 Bead Expanders 189 Bead Holders 189 Bead Hooks 180 Bead Lever Tools 294 Bead Lock 192 Bead Sealers 393 Bead Seater Upgrade Kits 180 Bead Seaters 184 Bead Seating Stands 186 Bench Grinders 359 Bench Vises 359	4346755504990420364699
# B // Balancing Beads - ATV/UTV 334 Balancing Beads - Counteract 333 Balancing Beads - EcoBalance 334 Balancing Beads - EQUAL FLEXX 336 Balancing Beads - Motorcycle 335 Batteries 65 Battery Chargers & Testers 355 Bead Breakers 170 Bead Breaking Tools 174 Bead Expanders 189 Bead Holders 189 Bead Hooks 180 Bead Lever Tools 294 Bead Lock 192 Bead Sealers 393 Bead Sealers 393 Bead Seater Upgrade Kits 186 Bead Seating Stands 186 Bench Grinders 359 Bench Vises 359 Block-Off Collar 265	43467555049904203646995
## B ## Balancing Beads - ATV/UTV	434675550499042036469956
// B // Balancing Beads - ATV/UTV 334 Balancing Beads - Counteract 333 Balancing Beads - EcoBalance 334 Balancing Beads - EQUAL FLEXX 336 Balancing Beads - Motorcycle 335 Batteries 65 Battery Chargers & Testers 355 Bead Breakers 170 Bead Breaking Tools 174 Bead Expanders 189 Bead Holders 189 Bead Holders 180 Bead Lever Tools 294 Bead Lever Tools 294 Bead Sealers 393 Bead Seader Upgrade Kits 186 Bead Seatery 186 Bead Seaters 186 Bead Seating Stands 186 Beach Grinders 359 Bench Grinders 359 Bench Off Collar 265 Blow Gun Kit 36 Blow Guns 32	433467555049904203364699562
## B ## Balancing Beads - ATV/UTV	434467555049904203646995622
## B ## Balancing Beads - ATV/UTV	434675550499042036469956225
## B ## Balancing Beads - ATV/UTV	4346755504990420364699562256

Brake Lining Thickness Gauge	268
Brooms	362
Brushes - Sidewall	
Buffing Hub	45
Buffing Stones	402
Buffout Wheels	408
// C //	
Calcium Chloride Pump	190
Camber and Caster Tools	342
Camber and Caster Tools - Heavy Duty	348
Cap Nuts	100
Carbide Cutting Tools	420
Centering Pins	203
Centering Sleeves	90
Check Valve	260
Clamps	39
Collets	309
Collet Spacers	
Cone Kit	700
Contour Wheels	408
Cord Reels	29
Core Housing	259
Couplers	34
Couplers - Female	55
Couplers & Plugs	181
Cribbing Blocks	
Cushion Gums	394
Cut-Off Tools	40
Cutters	48
Cutters	48
// D //	48
Cutters	48
Cutters	416
Cutters	48 416 38
Cutters	48 38 373
Cutters// D // Disc/Dish Sidewall Wheels DOT Conspicuity Tape Drain Pans Driving Irons	416 38' 373 17 ²
Cutters// D // Disc/Dish Sidewall Wheels	416 38' 373 17 ²
Cutters	416 38 373 174 206
Cutters	416 38 373 174 206 374
Cutters	416 38 373 174 206 374
Cutters	416 38 373 174 206 374
Cutters	416 38 373 174 206 374
Cutters	416 38 373 174 206 374
Cutters	484163837317206374374374
Cutters	48
Cutters	48
Cutters	48
Cutters	4841638373174206374380440440440440358358
Cutters	4841638373174206374380440440440358388
Cutters	



// 6 //		// K //	
Grinders	49	Key Tags	368
Grommets - Replacements		Knee Pads	38
		Knives - Tire Repair	410
// H //		// //	
Hammer Replacement Handles	201	// L //	
Hammers		Leak Detector	164
Hand Cleaners		Lift Bridge	
Hand Wipes		Lift Pads	
Hex Nut Remover		Lifts	
Hose Cutter		Liquid Fill Tools	
Hose Reel Bumpers		Liquid Lubricant - Blue	167
Hose Reels		Liquid Lubricant - Blue Bead Butter	
Hoses		Lock Ring Installer	10
Housings		Lock Ring Remover	
Hub Centering Solutions		Locking Nuts	
Hub Cover Installation Tool		Loose Nut Prevention	
Hub Lubricant		Loose Nut Prevention - Checkpoint	
Hub Replacement Pins		L-Rings	
Hub Replacement Spacers		Lubricant	
Hub Replacement Stems		Lubricant Tanks	
Hydraulic Coupler - Rubber Cover		Lubricants & Sealants	
Hydraulic Couplers	35	Lubricators	
Hydraulic Pumps	175	Lug Nut and Wheel Stud Checker Set	
11 - 11		Lug Nut Puller	97
//1//		Lug Nut Removal	92
Impact Socket Sets	74	Lug Nut Sockets	
Impact Sockets - Individual		Lug Nuts	98
Impact Wrench Accessories	71	Lug Wrenches	204
Impact Wrenches - #5 Spline		Lug-Off Kits	105
Impact Wrenches - 1"	44		
Impact Wrenches - 1/2"		// M //	
Impact Wrenches - 3/4"	44	Mallets	200
Impact Wrenches - 3/8"		Mechanics Gloves	
Inflating Connections	253	Mold Lubricant	
Inflation Chuck		Mount/Demount Heads	
Inflation Gauge - Large Bore		Mount/Demount Tools	
Inflator		Mounting & Packing Compound	
Inflator Accessory Block		Mounting Paste - Universal	
Inflator Adapter		Mud Flaps	
Inflator Kit		Γιαα ι ιαρο	
Inflator System		// N //	
InflatorsInflators - Automatic	201 270	Nailhole Tester	
		Nipples	
Inflators - Digital		Nitrile Gloves	
Inner Rim Cleaner		Nitrogen Gauge	
Insertion Tools	412	Nitrogen Inflation System	
// ١ //		Nitrogen Reel	30
// 3 //		No Rim Rust	16
Jack Accessories	127	Non-Impact Wrenches	46
Jack Oil	152	Non-Rust Rim Kote	16
Jack Plates	118	Nut Gauge	107
Jack Stands	135	Nut Splitter	
Jacks	177	·	
Jacks - Bottle		// 0 //	
Jacks - Garage		OBDII Connector	22
Jacks - High Tonnage			
Jacks - Lift		Oil Drain Funnels	
Jacks - Rolling		Oil Drains	
Jacks - Service	121	Oil Lift Drains	
Jacks - Transmission		Oil Lift Drains	
Jacks - Truck		Oil Seal Hardware	102
		DERINGS	1/16



// P //		Shop Vises
Paint Sticks & Markers	167	Sidewall Buffing Cup
Parts Return Bag		Skirt Nuts
Penetrants		Skiving Tools
Pinch Clamps		Socket Adapters
Pliers		Socket Driver
Pre-Buff Cleaner		Spare Tire Tools
	1.2.	Spray Bottles
Precure Accessories		Spraying Equipment
Pressure Sprayers Printers - Static Cling		Squeegees
Pullers		Steering Wheel Covers
Pullers	100	Stitchers
// Q //		Stitchers - Gooseneck
	700	Stud Alignment Tools
Quick Nut Accessories		Stud Cleaning Brushes
Quick Nuts & Pressure Cups	307	Stud Cleaning Kit
// R //		Stud Cleaning Tool
// K //		Stud Installers
Radiator Fillers	378	Stud Removers
Rams & Cylinders	176	Stud & Hub Tools
Rasp Blades & Spacers	430	Studding Equipment
Rasps	407	Surface Conditioning Discs
Ratchets	64	// - //
Recovery & Recycling Systems	376	// T //
Refrigerant Management System	377	Tack Bands
Regulators	27	Tailpipe Adapters
Repair Cement		Tank Valves
Repair Cords		Thread Gauges
Replacement Rib Nuts		Tire & Tube Mounting Compound - Con-
Resharpening Stones		Tire and Tube Mounting Compound
Retread Brushes		Tire Bags
Retread Release Liner	436	Tire Branding Inserts
Retreading Sidewall Wheels		Tire Buffer Accessories
Rib Nut Salvage Tool		Tire Buffers
Rim Assemblies & Replacement Belts		Tire Cart
Rim Clamp Nuts		Tire Cart Replacement Wheels
Rim Clamps		Tire Changer - Manual
Rim Gauges		Tire Changer Accessories
Rim Guard	103	Tire Changer Base Plate
Rim Hole Plugs		Tire Changers
Rim Nuts & Bushings	254	Tire Changing Stand
Rim Release		Tire Changing System
Rim Spud	259	Tire Deflator Set
Rim & Ring Tools		Tire Denailer
Rope Rubber		Tire Display
Rotary Gauges		Tire Dolly
Rotary Knife Blades		Tire Gauges
Rubber Blocks		Tire Gauges - Adjustable
Rubber Solvents		Tire Gauges - Automotive
Rust Retardant & Tire Lube		Tire Gauges - Digital
		Tire Gauges - Pencil
// S //		Tire Gauges - Truck
Safety Glasses	700	Tire Inflation Cage Accessories
Safety Vests		Tire Inflation Cages
Sanders		Tire Inflation Hoses
Scalers		Tire Inflation rioses
		Tire Insert Kit
Scrapers		Tire Irons
Screwdriver Sets		Tire Knocker
Serial Number Removers		Tire Labels
		Tire Lifter
Service Reminder Stickers		Tire Lubricant - Black
Shock & Strut Valves		Tire Mounting Compounds
Shop Procs Accessories		Tire Mounting Paste
Shop Press Accessories		Tire Paint
Shop Presses	155	THE FAITH

Shop Vises	360
Sidewall Buffing Cup	436
Skirt Nuts	
Skiving Tools	
Socket Adapters	
Socket Driver	
Spare Tire Tools	
Spray Bottles	16.4
Spraying Fauinment	104
Spraying Equipment	433
Squeegees	362
Steering Wheel Covers	369
Stitchers	421
Stitchers - Gooseneck	421
Stud Alignment Tools	149
Stud Cleaning Brushes	108
Stud Cleaning Kit	109
Stud Cleaning Tool	108
Stud Installers	
Stud Removers	
Stud & Hub Tools	
Studding Equipment	771
Studding Equipment	3/1
Surface Conditioning Discs	48
// 〒 //	
// T //	
Tack Bands	435
Tailpipe Adapters	358
Tank Valves	
Thread Gauges	
Tire & Tube Mounting Compound - Concentrated	161
Tire and Tube Mounting Compound	160
Tire Bags	369
Tire Branding Inserts	
Tire Buffer Accessories	
Tire Buffers	3, 405
Tire Cart	367
Tire Cart Replacement Wheels	367
Tire Changer - Manual	288
Tire Changer Accessories	
Tire Changer Base Plate	207
Tire Changers	
Tire Changing Stand	213
Tire Changing System	107
Tire Deflator Set	270
Tire Denailer	422
Tire Display	
Tire Dolly	
Tire Gauges	265
Tire Gauges - Adjustable	272
Tire Gauges - Automotive	269
Tire Gauges - Digital	270
Tire Gauges - Pencil	274
Tire Gauges - Truck	
Tire Inflation Cage Accessories	213
Tire Inflation Cages	
Tire Inflation Hoses	
Tire Inflators	
Tire Insert Kit	
Tire Irons	
Tire Knocker	
Tire Labels	
Tire Lifter	151
Tire Lubricant - Black	160
Tire Mounting Compounds	163
Tire Mounting Paste	161
Tire Paint	



Tire Patch Prep Wheel		// U //	
Tire Pressure Equalization		Underhoist Stands	152
Tire Pressure Placard Stickers	222	Olideliloist Stalias	
Tire Probes		// V //	
Tire Racks - Wall Mount	366		
Tire Regroovers		Valve Accessories	
Tire Repair & Storage Cabinets	428	Valve Adapter Gun	
Tire Repair Accessories	388	Valve Adapters	
Tire Repair Chemicals	396	Valve Breaker	
Tire Repair Hand Tools		Valve Caps	
Tire Repair Insert Kit	400	Valve Caps & Cores	
Tire Repair Kit	63	Valve Connectors	
Tire Repair Kits	401	Valve Cores	
Tire Repair Patches	386	Valve Extensions	
Tire Repair Patches - Heavy Duty	399	Valve Inserts	227
Tire Repair Patches & Plugs		Valve Stem Removal Tool	249
Tire Repair Seals		Valve Stems	227
Tire Repair Strands		Valve Tool Kit	249
Tire Repair Tool Pouch		Valve Tools	265
Tire Repair Tools and Accessories		Valve Tools - Insertion & Removal	266
Tire Repair Vacuum		Vulcanizing Cements	404
Tire Repair Valves - Inner Tubes		Vulcanizing Fluids	
Tire Repairs		-	
Tire Sealant		// W //	
Tire Sealant Tools and Accessories		Wedges	200
Tire Slings		Wheel & Rim Removal	
Tire Snakes		Wheel Arbor Adapters	
Tire Spoons		Wheel Balancer Accessories	
Tire Spreaders		Wheel Balancers	
Tire Swabs and Brushes.		Wheel Chocks	
Tire Talc		Wheel Cover Puller	
Tire Tools			
Tire Valve Assembly Kit		Wheel Dollies Wheel Installation Sleeves	
Tire Valves			
Tire Valves - Large Bore	262	Wheel Lift System	
Tire Veneer		Wheel Lifting Bar Wheel Lock Removal	
Torque Accessories			
Torque Extensions		Wheel Nuts	
Torque Multipliers		Wheel Protectors	
Torque Sockets		Wheel Stud Alignment Set	
Torque Tools - Blue Tork		Wheel Stud Alignment Tool	
Torque Wrenches		Wheel Stud Remover & Installer Cart	
Torque Wrenches - Valve Nut		Wheel Stud Repair	
		Wheel Weight Hammer	
TPMS Accessory Kits TPMS Accessory Kits - Aftermarket		Wheel Weight Kit - Empty Display Only	
TPMS Accessory Kits - Aftermarket		Wheel Weight Rack	
TPMS Combo Kits		Wheel Weight Removal Tool	
		Wheel Weight Roll Stand	
TPMS KitsTPMS Replacement Sensors		Wheel Weight Rolls	
		Wheel Weights - Heavy Duty Lead Truck	
TPMS Replacement Valves		Wheel Weights - Adhesive Lead	
TPMS Sensors		Wheel Weights - Adhesive Steel	
TPMS Sensors - Universal		Wheel Weights - Lead Passenger	
TPMS Tools	۲۱δ	Wheel Weights - Plasteel	
TPMS Tools - Software Updates		Wheel Weights - Steel Passenger	
TPMS Transmitters		Wheel Weights - Zinc Passenger	
TPMS Value Cons		Wheel Weights - Zinc Truck	
TPMS Valve Caps		Wheelok Systems	
TPMS Valve Stems		Wicking Products	
Trailer Stands		Wire Wheel Brushes	
Tread Depth Gauges		Work Lights	
Tread Depth Measurement Tools		Work Stations	
Truck Ramps	128	Work Ticket Holder	
		Wrenches	379, 202



101-0005814	102-1373015	112-0035427	117-0520027	126-0585028
101-0007814	102-1376015	112-0037627	117-0530424	126-0785028
101-0015814	102-1378015	112-0037827	117-0570224	126-0785128
101-0101214	102-2412521	112-0135227	117-0913224	126-0850028
101-1032515	102-2421221	112-0135427	117-1148127	126-1565028
101-1101214	105-0001519	112-0391027	117-5862582	126-1585128
101-2345121	105-0002519	112-0391227	119-0001123	126-2112029
101-2470521	105-0003519	113-0035227	119-0013023	126-2112129
101-2475121	105-0005019	113-0035327	119-0048523	126-3112029
101-2545221	105-0007519	113-0035427	121-0122531	126-3112129
101-2755022	105-0010019	113-0037627	121-0125031	126-3118029
101-2755122	105-0012519	113-0135227	121-0382531	126-4250030
101-2755222	105-0015019	113-0135327	121-0385131	126-4350030
101-2755322	106-0051917	113-0135427	121-1470031	126-4500030
101-4078014	106-1172717	113-0410827	123-1382532	126-5250030
101-4078114	106-1172817	114-0075425	123-1401232	126-7583528
101-4078214	106-1172917	114-0335225	123-1402532	126-7785028
101-4078314	106-1173017	114-0335325	123-1405032	126-7805029
101-4101214	106-1188217	114-0335425	123-3802532	126-7807529
101-4111214	106-1188317	114-1335225	123-3805032	126-7902529
101-4151214	106-1188417	114-1335325	123-3815032	127-0588030
101-4211214	106-1319417	114-1335425	124-0443528	127-1100429
101-4251214	106-2430522	114-7520025	124-0450028	127-1104029
101-4351214	106-2471022	114-7520125	124-0745028	127-1104329
101-4411214	106-2471222	114-7520225	124-1350030	127-104329
101-4451214	106-2853017	114-7520325	124-1500030	127-86871294
101-5008020	106-3002022	114-7530025	124-3350030	127-8687131
101-5112015	106-8909017	114-7530025	124-7543528	127-86872294
101-5312015	106-9473017	114-7530225	124-7545028	127-8687231
101-5412015	107-0012536	114-7530225	124-7745028	128-0000636
101-5800017	107-6910136	114-7540025	125-0462528	128-2000036
101-6101216	111-3000226	114-7540125	125-0545028	128-7202132
101-6108116	111-3290826	114-7540225	125-0543028	128-7202232
101-6121216	111-3291026	114-7540325	125-0565028	128-7202332
101-6151216	111-3291226			128-7202432
101-6151316	111-3520026	115-5050826 115-5081026	125-0635028 125-0650028	128-7202432
101-6580116	111-3520026	115-5081226	125-0650028	131-0002034
101-6751416	111-3520226	115-5520026	125-0765128	131-0002035
101-6751516	111-3520226	115-5520026	125-0765228	131-0251635
101-6758116	111-3530026	115-5530026	125-0767028	131-0888833
101-6758316	111-3530126	115-5530126	125-2121530	131-1700035
101-7115021	111-3530226	115-5540026	125-2140830	131-1800035
101-7115322	111-3530326	115-5540126	125-2141030	131-6148633
101-7390416	111-3540026	115-5760126	125-3500030	131-6152333
101-7508020	111-3540126	117-0001024	125-3500430	131-6152433
101-7512015	111-3540226	117-0005527	125-5500030	131-6152633
101-7532015	111-3540326	117-0032927	125-7563528	131-6152733
101-7542015	111-3760026	117-0035527	125-7565028	131-6152833
101-7800017	111-3760126	117-0093527	125-7605029	131-6152933
102-1153015	112-0016227	117-0148127	125-7607029	131-6153134
102-1156015	112-0026227	117-0168127	125-7607529	131-6153833
102-1188015	112-0035227	117-0505017	125-7610029	131-6153933
102-1303020	112-0035327	117-0505117	125-7765028	131-6154833



131-6155033	136-0060837	137-7323538	153-7749243	156-2856660
131-6155133	136-0080637	137-7325538	153-9491161	156-7971645
131-6157333	136-0080837	137-7326538	153-9691161	157-0012566
131-6157433	136-0134436	137-7327538	154-0025958	157-0030266
131-6157833	136-0136636	137-7328538	154-0026159	157-0030766
131-6157933	136-0234436	137-7329538	154-0077244	157-0030866
131-6252333	136-0236636	137-7330538	154-0177244	157-0031368
132-0371635	136-0334437	137-7331538	154-0261359	157-0032767
132-0371835	136-3449036	137-7332538	154-0261659	157-0078950
132-6147634	136-6126438	137-7333538	154-0776944	157-0087448
132-6147834	136-7140437	137-7334538	154-1214559	157-0087549
132-6148034	136-7140538	137-7335538	154-2161759	157-0087649
132-6148134	136-7140638	151-0082647	154-2214559	157-0103556
132-6155334	136-7140838	152-0021269	154-2776344	157-0103856
132-6155434	136-7144038	152-0072442	154-3214559	157-0132767, 406
132-6155834	136-7150437	152-0082847	154-3776344	157-0187950
132-6155934	136-7160437	152-0211569	154-7769644	157-0325257
133-0185534	136-7160637	152-0772742	155-0028060	157-04038405
133-0185534	136-7180637	152-0772942	155-0029060	157-06010405
133-0501235	136-7180837	152-0782947	155-0029360	157-06510405
133-0501835	136-7240437	152-0783047	155-0029559	157-06520406
133-1703035	137-0034438	153-0023158	155-0280660	157-06550405
133-6147134	137-0034638	153-0024458	155-0285059	157-0712048
133-6147434	137-0036638	153-0073442	155-0285660	157-0730250
133-6156334	137-0038838	153-0073643	155-0777344	157-0780267
133-6156434	137-0041837	153-0173442	155-0777844	157-0780367
133-6156834	137-0042037	153-0223558	155-0777945	157-1087457
133-6156934	137-0043937	153-0231258	155-0778245	157-1087557
133-7511235	137-0062137	153-0244258	155-0778345	157-14038405
133-7511635	137-0132438	153-0733643	155-0797145	157-16010405
134-6148734	137-0134438	153-0749242	155-0797645	157-16510405
134-6154334	137-0134638	153-0773243	155-1285652	157-16520406
134-6154434	137-0134838	153-0773742	155-1777945	157-16550405
134-6154534	137-0136838	153-0774843	155-1778245	157-1730250
134-6155234	137-0138938	153-0774943	155-1778652	157-1780267
135-0090034	137-0141837	153-0782947	155-2171060	157-1780367
135-0090134	137-0143937	153-0783047	155-2646452	157-7892650
135-0091034	137-0152037	153-0828147	155-2778644	158-0031168
135-0091134	137-0162137	153-1223558	155-2850659	158-0077846
135-0098034	137-0162337	153-1226053	155-2856060	158-0087148, 406
135-1060535, 179	137-0162437	153-1749242	155-5000044	158-0087348, 406
135-1060635, 179	137-0855038	153-2213558	155-7773644	158-0187148
135-1160635, 179	137-1001032	153-2223558	155-7778644	158-0187348
135-1260635, 179	137-1001132	153-2312053	155-7782645	158-0301268
135-6124035	137-1142032	153-2312153	155-7783645	158-0720246
135-6124135	137-1152038	153-3213558	155-8692062	158-1087155, 406
136-0034436	137-1162138	153-3223558	155-8692262	158-1087355, 405
136-0036636	137-1162338	153-4223558	156-0290160	158-1187155, 405
136-0040137	137-3952538	153-7152161	156-0293160	158-4092063
136-0040637	137-5029138	153-7152161	156-0295159	158-4092263
136-0040837	137-7242138	153-7692062	156-1285652	158-4592263
136-0060437	137-7321538	153-7692262	156-1778652	159-0013266
136-0060637	137-7322538	153-7692243	156-2800660	163-0101876
150 00000	131 13223	133 7740243	130 20000	103 0101070



163-0101976	163-1022376	164-0211075	165-3038077	168-0560185
163-0102176	163-1023076	164-0218175	165-3038177	168-0760046, 82
163-0102276	163-1024076	164-0218575	165-3040177	168-0760246, 82
163-0102476	163-1024176	164-0232377	165-3040277	168-0760346, 82
163-0102676	163-1026076	164-0462675	165-3041077	168-1208081
163-0103076	163-1026176	164-2026077	165-3042077	168-1210081
163-0103276	163-1026276	164-2027077	165-3048177	168-1212081
163-0103376	163-1026376	164-2027177	165-3048277	168-1214081
163-0103476	163-1027076	164-2030077	166-0402677	168-1225082
163-0103676	163-1027176	164-2030177	166-0403377	168-1225480
163-0104876	163-1028076	164-2033077	166-0403477	168-1241081
163-0115074	163-1028176	164-2035077	166-0403577	168-1241281
163-0115174	163-1028276	164-2036077	166-0403877	168-1241481
163-0115274	163-1028376	164-2040177	166-0404077	168-1245081
163-0115374	163-1030076	164-2040277	166-0404177	168-1246581
163-0266874	163-1032076	164-2048077	166-0404277	168-1248081
163-0266974	163-1036076	164-2048177	166-0404877	168-1299778
163-0284974	163-1040076	164-2048277	166-0419175	168-1299978
163-0515374	163-1040176	165-0301777	166-0432377	168-1300081
163-1010076	163-1103276	165-0301977	166-4036077	168-1600081
163-1010176	163-1526076	165-0302077	166-4036177	168-1814184
163-1011176	163-2201776	165-0302177	166-4048077	168-2175580
163-1012076	163-2201976	165-0302677	167-0172181	168-2178080
163-1012176	163-2202176	165-0302777	167-1205074	168-2191080
163-1013076	163-2202276	165-0303077	167-1205174	168-2196580
163-1013176	163-2221974, 92	165-0303377	167-1211076	168-2198080
163-1014076	163-9121781	165-0303477	167-1217976	168-2211080
163-1014176	163-9121981	165-0303577	167-1246076	168-2218080
163-1014276	163-9122181	165-0304177	167-1246176	168-2221280
163-1014376	163-9123481	165-0304277	167-1249076	168-2221480
163-1015076	163-9123681	165-0304477	167-1251076	168-2261080
163-1015176	163-9127881	165-0304677	167-1291076	168-2301480
163-1016076	164-0201777	165-0305277	167-1291176	168-4276084
163-1016176	164-0201977	165-0305477	167-1291276	168-4276184
163-1016276	164-0202077	165-0305677	167-1819576	168-4352884
163-1016376	164-0202177	165-0306077	167-2121576	168-4750182
163-1017076	164-0202477	165-0311975	167-2122576	168-5760084
163-1017176	164-0202677	165-0319075	167-2222576	168-5760184
163-1017276	164-0202877	165-0319775	168-0005883, 249	168-6001180
163-1017476	164-0203077	165-0332177	168-0025080	168-6002083
163-1018076	164-0203277	165-0332377	168-0042580	168-6002583
163-1018176	164-0203377	165-0351777	168-0060080	168-6725083
163-1018276	164-0203477	165-0382077	168-0065280, 236	168-6751083
163-1018376	164-0203577	165-0562675	168-0091683, 249	168-9611182
163-1019076	164-0203677	165-3028077	168-0120085	168-9735485
163-1019176	164-0203877	165-3028177	168-0202280	169-0100277
163-1020076	164-0204177	165-3030077	168-0210085	169-0100377
163-1020176	164-0204277	165-3030177	168-0210185	169-0100577
163-1021076	164-0204477	165-3030277	168-0325085	169-0102077
163-1021176	164-0204677	165-3032077	168-0325185	169-0123475
163-1022076	164-0205277	165-3032177	168-0325285	169-0200677
163-1022176	164-0205677	165-3036177	168-0440085	169-0201077
163-1022276	164-0206077	165-3036277	168-0560085	169-0201377



169-0203077	175-1003754	227-40920346	246-35010348	301-18209116
169-0300677	175-1004054	227-89000350	246-35011348	301-18302116
169-0301077	175-1004354	228-00761352	246-35012348	301-18502116
169-0301377	175-1871355	228-00764352	246-35020348	301-18992116
169-0302077	175-2310455	228-07600352	246-35021348	301-20220120
169-0401077	175-2314271	228-61400350	246-35022348	301-20221120
169-0402077	175-2871355	231-00532347	246-35030349	301-41020117
169-1200681	175-3310471	231-00535347	246-35031349	301-41040117
169-1341378	175-8265155	231-23100342	246-35032349	301-41060117
169-2010077	175-8307155	231-23130342	246-35040349	301-41080117
171-0115166	176-1840654	231-23180342	246-35041349	301-41150117
171-0116166	181-0001670	231-23220342	246-35042349	301-41200117
171-0117166	181-0008570	231-23230342	246-35060349	301-41201117
171-4703251	181-0040470	231-23580342	246-35061349	301-41300117
171-4705051	181-0040670	231-23755343	246-35062349	301-43202117
171-4705151	181-0140470	231-23765343	246-35070349	301-43220117
171-4705251	181-1051071	231-86250344	246-35071349	301-61120115
171-4705751	181-1054071	231-87310343	246-35072349	301-61124115
171-4705951	181-1151071	231-87385343	246-36000349	301-61200115
171-4706151	181-1154071	231-87400343	246-36010349	301-61207115
171-4707151	181-1222871	231-87500343	246-36011349	301-76312113
171-4707351	203-10003351	233-23120347	246-36012349	301-76320113
171-4707451	203-35000351	233-23130347	247-08130350	301-76412113
171-4707851	218-00060318	236-00100345	247-33173352	301-76502113
171-4709151	218-79324318	236-45938350	247-74910350	301-76503113
171-4709551	221-75200347	236-77350350	247-77880347	301-76505113
171-4709651	221-75400347	237-23510344	247-91860349	301-76508113
171-4727051	221-75600347	237-23520344	251-88260340	301-76512113
171-4730051	221-75800347	237-23530344	251-88270340	301-76520113
172-5572164	222-25430344	237-23540344	301-01201114	301-76535114
172-5662264	222-25435344	241-35001348	301-01220114	301-76560114
173-0001855, 411	222-25440344	241-35002348	301-02200114	301-76720113
173-0001955, 411	222-25445344	241-35003348	301-02201114	301-76721113
173-0002055, 411	222-62010345	241-35004348	301-05612118	301-76820113
173-0002255, 411	222-66040346	241-35005348	301-05620118	302-00200123
173-0002355, 411	222-66045346	241-35006348	301-05621118	302-00224131
173-0010148	222-66047346	241-35007348	301-05630118	302-03531131
173-0022048	222-67467346	243-00841348	301-10120116	302-04532131
173-09150411	222-67475345	243-00842348	301-10125116	302-05601121
173-09165411	222-67660346	243-00843348	301-10129116	302-05602121
173-09166411	222-82395344	243-00844348	301-10200116	302-05613121
173-09167411	222-87520344	243-00845348	301-10205116	302-05614121
173-09201411	223-81240343	243-00846348	301-10208116	302-10802139
173-09202411	223-82360346	243-00847348	301-10209116	302-10803139
173-09211411	223-91000347	243-00848348	301-10300116	302-14140129
173-09212411	223-91040347	243-00891348	301-10500116	302-14360138
173-09213411	226-67030345	243-00892348	301-14460119	302-14400139
173-09214411	226-67090345	243-00893348	301-14461119	302-19150120
173-09215411	226-67125346	243-00894348	301-14475119	302-22050127
173-09216411	226-67165346	243-00895348	301-14480119	302-22051127
173-09400411	226-67230345	243-00896348	301-18126116	302-22100127
175-0087355	226-67290345	243-00897348	301-18204116	302-22101127
175-1002654	226-67410345	243-00898348	301-18206116	302-22201127



302-23221	130	302-72081126	302-93667124	309-14469119	312-4035129
302-23222	130	302-72091126	302-93731128	309-14472119	312-4035329
302-23301	130	302-72200130	302-93733128	309-14473119	312-4050129
302-23501	130	302-72204133	302-93735131	309-14500119	312-4050329
302-23991	130	302-72206133	303-00010316	309-14501119	312-4050429
302-25055	122	302-72212133	304-00009313	309-14503119	312-4545329
302-25057	122	302-72218133	304-00010310	309-18181118	312-4545429
302-26030	123	302-72220126	304-00111312	309-24468119	312-4545529
302-27035	122	302-72225133	304-00120312	309-40080145	316-0001239
302-27036	122	302-72230126	304-00121313	309-61275318	316-0005839
302-28045	141	302-72244133	304-00210311	309-72501144	316-0007839
302-29013	123	302-81004136	304-01102311	309-72502144	316-0010239
302-31500	152	302-81006136	305-41150314	309-72504144	316-0050739
302-31501	152	302-81012136	305-41151314	309-72505144	316-0070939
302-32038	137	302-81022152	305-41152314	309-72506144	316-0071639
302-32068	137	302-81033152	305-41153314	309-72507144	316-0091139
302-32105	138	302-81034152	305-41400314	309-72508144	316-0091639
302-32107	138	302-81035152	305-41401314	309-72517144	316-0109839
302-32125	137	302-81050152	307-00006316	309-72525144	316-0111339
302-32225		302-81122152	307-01021315	309-72533144	316-0131539
302-33020	152	302-81205136	308-00110142	309-93248145	316-0151739
302-35002		302-81208136	308-00140315	309-93291152	316-0151839
302-42003		302-81209136	308-00190315	309-93294152	316-0172039
302-42021	125	302-81210136	308-10320134	309-93721145	316-0192239
302-42025		302-81225136	308-10321134	309-99700318	316-0202339
302-42030		302-81225139	308-10322134	311-21500359	316-0222539
302-42031		302-82205136	308-10323134	311-28805360	316-0232739
302-42032		302-82208136	308-10324134	311-28806360	316-0233239
302-42033		302-82209136	308-34100141	311-28807360	316-0374039
302-42225		302-82210136	308-82990140	311-28808360	316-9109839
302-42250		302-82225139	308-82992140	311-28810360	317-78000153
302-43202		302-91000134	308-82999140	311-28811360	317-78021153
302-43222		302-91001134	308-83999140	311-28812360	317-78055153
302-45125	138	302-91003134	308-93690142	311-28813360	317-78056153
302-48301		302-91004134	308-93693142	311-28814360	317-78057153
302-51005	135	302-91005134	308-93737142	311-64055360	317-78058153
302-55200		302-92000132	309-00003317	311-64065360	317-78077153
302-56501		302-92004132	309-00007317	311-64650360	317-78078153
302-62035		302-92007132	309-00009317	311-64800360	317-78110153
302-63030		302-92010132	309-00011317	311-77101359	317-78111153
302-63060	135	302-93200128	309-00013317	311-77102359	317-93300154
302-63120		302-93503137	309-00014317	311-77103359	317-93400154
302-63220	135	302-93506137	309-00022317	311-77172359	317-93610154
302-63221		302-93511137	309-00404317	312-03007364	318-04120179
302-71000		302-93512137	309-00925152	312-03120364	318-04960179
302-71100		302-93524137	309-10264318	312-03120423	318-09795179
302-71203		302-93526139	309-12121118	312-04146423	318-09796179
302-71233		302-93642124	309-14462119	312-04147423	318-09797179
302-71331		302-93652124	309-14463119	312-05224364	318-09798179
302-71335		302-93657124	309-14464119	312-08473423	318-09799179
302-71500		302-93659141	309-14465119	312-14923423	318-10300177
302-71550		302-93660124	309-14466119	312-15224364	318-10312177
302-72036		302-93662124	309-14468119	312-25224364	318-10314177



318-10518176	322-11102375	341-01352355	391-22040358	396-00803383
318-10808176	322-17432375	345-1181265	391-22050358	396-00804383
318-10809176	322-17892374	345-1183565	391-22150358	396-00805383
318-11090172	322-17922374	345-1185065	391-22160358	396-06780384
318-11518176	322-17972374	345-1243065	391-52500358	396-10011383
318-13000177	322-17982374	345-1244065	391-53000358	396-12590183
318-13120177	322-19202373	345-1246065	391-54000358	396-12593183
318-13164177	322-19822374	361-00134377	391-90250358	396-12594183
318-13165177	322-24019375	361-01234377	391-90300358	396-12596183
318-15000175	322-24020375	361-03030377	391-90350358	396-14200380
318-15010175	322-24026375	361-11234376	391-90400358	396-14201383
318-15020175	322-41203373	361-34288376	391-90475358	396-14202383
318-15025175	322-41206373	361-34788376	391-90575358	396-14955380
318-15901175	322-41461373	361-34789376	391-90600358	396-15300382
318-15905176	322-41467373	361-34988376	391-90606358	396-15336382
318-15906176	328-00008356	371-41000146	391-91000358	396-15337187, 38
318-15907176	328-00014356	371-41001146	391-91250358	396-15338183, 38
318-15920175	328-0001671, 356	371-42000146	391-91300358	396-15339183, 38
318-15930175	328-00050356	371-42003146	391-93000358	396-15342183, 38
318-15940175	328-00114356	371-43000146	393-00005357	396-15353382
318-15950175	328-00116357	371-72000143	393-00128357	396-20773380
319-00337361	328-00214357	371-72001143	395-00016357	396-21000380
319-00357361	328-00314356	371-72050143	395-00101363	396-23412380
319-00358361	328-05003165	371-72450143	395-00102363	396-23421380
319-00436361	328-05005165	371-72501143	395-00103363	396-23430380
319-00526361	328-1000171	371-72550143	395-00104363	396-30551381
319-03732179	329-00505378	371-72701144	395-00116357	396-30552381
319-19800361	329-08874372	371-93718145	395-00125363	396-30553381
319-5001572	329-08878372	371-93720146	395-00126363	396-30554381
319-72521361	329-08890372	391-00125358	395-00216357	396-30561381
319-72521236	329-08895372	391-00130358	395-00300363	396-30562381
319-96090106	329-18685378	391-00140358	395-00400363	396-30563381
319-96091106	329-19702378	391-00225358	395-06400363	396-30564381
319-96092106	329-19732378	391-00230358	395-06401363	396-40317384
319-96093106	329-19852373	391-00240358	395-10100439	396-49101384
319-96094106	329-50750379	391-00325358	395-13124362	396-49102384
319-96095106	329-53500379	391-00323358	395-40000363	396-49103384
319-96096106	329-53700379	391-00340358	395-42023362	396-49104384
319-96097106	329-61570379	391-00350358	395-44020362	396-55220384
319-96098106	329-61600379	391-00425358	395-45507362	396-55221384
322-00125375	329-63600379	391-00423358	395-83039362	396-55222384
322-00200375	331-44020155	391-15250358	396-00102382	396-55223384
				396-62150381
322-00201375 322-0025035	331-78106156 331-78600156	391-15300358	396-00301383	396-72150381
		391-15350358	396-00302383	
322-00251375 322-00300375	331-78605156	391-15400358	396-00303383	396-72182381
	331-93806155	391-20030358	396-00304383	396-73601380
322-00301375	331-93809155	391-20040358	396-00305383 396-00401383	396-73611380
322-00350375	341-00114355	391-20050358		396-73621380
322-00500375	341-00117355	391-20060358	396-00402383	396-82150381
322-00650375	341-00118355	391-21025358	396-00403383	396-90306381
322-00750375	341-00119355	391-21030358	396-00404383	396-90333381
322-01000375	341-00121355	391-21040358	396-00405383	396-92150381
322-02444374	341-00122355	391-22030358	396-00802383	396-93150381



396-96110381	402-00113108	402-2004487	402-3060697	402-43357110
399-00005370	402-00118108	402-2004687	402-31565205	402-43358110
399-00011370	402-00120108	402-2007887	402-31566205	402-46000197
399-00101365	402-00122108	402-2011487	402-31567205	402-46001197
399-00102365	402-00128108	402-2013388	402-31568205	402-46002197
399-00103365	402-00160197	402-2033388	402-31820195	402-46003197
399-11111365	402-00900197	402-20396194	402-32101195	402-47000197
399-60000369	402-01160197	402-20397194	402-32102195	402-47001197
399-60098368	402-0128394	402-20406194	402-32119195	402-47002197
399-74980370	402-01322109	402-20415194	402-32120195	402-47003197
399-98313368	402-01900197	402-20430194	402-32123198	402-50200103
399-98893369	402-02001195	402-2101988	402-32125198	402-50301103
399-99302368	402-02002195	402-2102188	402-32127198	402-6200089
399-99323368	402-02005195	402-2102288	402-32128198	402-6250089
399-99391369	402-02006195	402-2103088	402-32129198	402-6260089
399-99392369	402-02100195	402-2103188	402-32130198	402-90518194
399-99415369	402-02101195	402-2103288	402-32131198	402-90519194
399-99429369	402-02102195	402-2103388	402-32420195	403-35595204
399-99432368	402-0301697	402-2103688	402-3261049, 109	403-35620204
399-99433369	402-0311697	402-2103888	402-3261149, 109	403-35636204
399-99435369	402-04300197	402-2104088	402-3261349, 109	403-35656204
399-99479368	402-04301197	402-2104188	402-3261449, 109	403-35657204
401-0284096	402-04311197	402-2104488	402-3261549, 109	403-35659204
401-0284196	402-04401197	402-2104688	402-3261649, 109	403-35661204
401-10000104	402-06662181	402-2313388	402-33020195	403-35662204
401-10160104	402-07545110	402-2402788	402-33021195	403-35663204
401-10170104	402-07546110	402-2402888	402-33022195	403-35695204
401-10220104	402-07547110	402-2403088	402-33024195	403-35696204
401-10221104	402-08029180	402-2403288	402-33052195	403-35697204
401-10280104	402-11000103	402-2403388	402-33062195	403-35795204
401-10290104	402-17000103	402-2403888	402-33195196	404-34543203
401-10430104	402-18000103	402-2413388	402-33196196	404-34545203
401-10431104	402-2000187	402-2502188	402-33199196	404-34547203
401-10810104	402-2001587	402-2502288	402-33219195	404-6730093
401-2840196	402-2001787	402-2503288	402-33220195	405-32501203
401-2840296	402-2001887	402-2503388	402-33223198	405-32502203
401-2840396	402-2001987	402-2513388	402-33224198	405-32503203
401-2840496	402-2002087	402-2830194	402-33238195	405-32504203
401-2840596	402-2002187	402-2830294	402-33239195	405-32505203
401-2840696	402-2002387	402-2830394	402-34402203	405-32506203
401-2840796	402-2002487	402-2830494	402-34645197	405-32508203
401-2840896	402-2002687	402-2830594	402-34648198	405-32509203
401-2840996	402-2002787	402-2830694	402-34649197	405-32551203
401-69260107	402-2002887	402-2830794	402-34672205	405-32552203
401-69290107	402-2002987	402-2830894	402-34674205	405-32553203
402-00013108	402-2003087	402-2830994	402-34678205	405-32556203
402-00014108	402-2003287	402-2831094	402-34950196	405-32557203
402-00016108	402-2003387	402-2831194	402-35440195	405-34401203
402-00022108	402-2003487	402-2831294	402-37330109	405-35690204
402-00028108	402-2003587	402-2831394	402-37335109	406-30609202
402-00050197	402-2003687	402-2831494	402-37340109	406-30610202
402-00060197	402-2004087	402-2831594	402-43351110	406-30612202
402-00080197	402-2004187	402-2831694	402-43352110	406-30618202
402-00112108				



406-5096					
406-60300 202 422-1005 170 426-53533 201 429-90402 81 435-06001 160 406-60302 202 422-10105 170 426-53535 201 432-00730 162 435-06003 160 406-60303 202 422-10105 170 426-53555 201 432-00730 162 435-06003 160 406-60303 202 422-10105 171 426-35355 201 432-00730 162 435-06003 160 406-60303 202 422-1020 170 426-35411 200 432-00705 162 435-06008 160 407-00305 156 422-1025 172 426-35417 200 432-00705 162 435-06008 160 407-00305 156 422-1025 172 426-35417 200 432-00705 162 435-0000 160 407-00300 149 422-1040 170 426-35003 201 432-00705 162 435-0000 160 407-00300 149 422-1040 171 426-37004 201 432-00705 162 435-0000 160 407-4000 150 422-1050 171 426-37004 201 432-00705 162 435-0000 160 407-47000 150 422-1060 171 426-37004 201 432-00200 161 435-0000 160 407-47000 150 422-1060 171 426-37004 201 432-00200 161 435-0000 160 407-47003 150 422-1060 171 427-00041 174 432-0005 161 435-0000 160 407-47003 150 422-1066 171 427-00042 174 432-0005 161 435-0000 160 407-47010 149 422-1066 171 427-00042 174 432-0005 161 437-0000 160 407-47103 149 422-1070 170 427-5000 174 432-0005 161 437-0000 160 407-7013 148 422-1200 170 427-5000 174 432-0020 160 437-0000 160 407-7013 148 422-12070 170 427-5000 174 432-0020 160 437-0000 160 407-7013 148 422-12070 170 427-5000 174 432-0020 160 437-0000 160 407-7013 148 422-12070 170 427-5000 174 432-0020 160 437-0000 207 407-8230 147 422-1200 170 427-5906 174 432-0020 160 437-0000 207 407-8230 147 422-1200 170 427-5906 174 432-0020 160 437-0000 207 407-8230 147 422-1200 178 428-3730 200 432-0167 161 441-0020 207 407-8230 148 422-1300 178 428-3730 200 432-0167 161 441-0020 207 407-8230 148 422-1300 178 428-3730 200 432-0167 161 441-0020 207 407-8230 148 422-1300 178 428-3730 200 432-0167 161 441-0020 207 407-8230 148 422-1300 178 428-3730 200 432-0167 161 441-0020 207 407-8230 148 422-1300 178 428-3730 200 432-0166 160 437-0006 100 437-0006 160 407-0030 178 428-3730 200 432-0160 161 441-0020 207 407-8230 151 422-1300 178 428-3730 200 432-0160 160 437-0006 200 437-0006 160 437-0006 178 428-3000 178 428-	406-30619202	422-10102172	426-35331201	429-70162181	435-02785160
406-60301 202 422-11005 170 425-53534 201 432-90403 811 435-06002 1.60 406-60303 202 422-11010 170 426-53555 201 432-00730 162 435-06003 1.60 406-60303 202 422-1102 170 426-53555 201 432-00731 162 435-06004 1.60 406-60908 202 422-11025 172 426-35417 200 432-00740 162 435-06008 1.60 407-00350 156 422-11025 172 426-35417 200 432-00750 162 435-07001 1.60 407-00200 149 422-11040 170 426-37003 201 432-00751 162 435-07001 1.60 407-00350 156 422-11040 171 426-37003 201 432-00751 162 435-07001 1.60 407-4000 156 422-11060 171 426-37003 201 432-00750 162 435-00002 1.60 407-47053 150 422-11060 171 427-00041 174 432-02000 161 435-08003 1.60 407-47053 150 422-11065 171 427-00042 174 432-02000 161 435-08003 1.60 407-47105 149 422-11067 172 427-00525 174 432-02008 161 435-08003 1.60 407-4710 149 422-12070 170 427-32056 173 432-0014 160 437-00002 1.60 407-70132 148 422-12070 170 427-35924 174 432-02014 160 437-00003 1.60 407-70132 148 422-12070 170 427-35924 174 432-02029 160 437-00003 1.60 407-72040 156 422-12070 170 427-35926 174 432-02015 160 437-00003 1.60 407-72014 156 422-12070 170 427-35926 174 432-02015 160 437-00003 1.60 407-72014 149 422-12000 170 427-35926 174 432-02015 160 437-00003 1.60 407-72013 148 422-12070 170 427-35926 174 432-02015 160 437-00003 1.60 407-72014 156 422-13010 178 428-37302 200 432-0167 161 441-02202 207 407-82306 151 422-13010 178 428-37302 200 432-0167 161 441-0220 207 407-82306 151 422-13010 178 428-37302 200 432-1218 163 441-3600 206 407-99356 151 422-13010 178 428-37302 200 432-1218 163 441-3600 206 407-99356 151 422-13010 178 428-37302 200 432-1218 163 441-3600 206 407-90358 151 422-13000 178 428-37302 200 432-1218 163 441-3600 206 407-90358 151 422-13000 178 428-37302 200 432-1218 163 441-3600 206 407-90358 151 422-13000 178 428-37302 200 432-1218 163 441-3600 206 407-90358 151 422-13000 178 428-37302 200 432-1218 163 441-3600 206 407-90358 151 422-13000 178 428-37302 200 432-1218 163 441-3600 200 407-90358 151 422-13000 178 428-37302 200 432-1218 163 441-3600 200 407-90358 151 422-13000	406-30620202	422-10103171	426-35332201	429-90401181	435-02786160
406-60302 202 422-1010 170 426-53535 201 432-00730 162 435-06004 160 406-60308 202 422-10105 171 426-53517 201 432-00731 162 435-06004 1610 406-60908 202 422-10205 170 426-53411 200 432-00731 162 435-06008 160 407-00505 156 422-1025 172 426-5341 200 432-00750 162 435-07002 160 407-00500 149 422-10404 170 426-57003 201 432-01750 162 435-07002 160 407-00500 149 422-10404 171 426-57003 201 432-01750 162 435-07002 160 407-40500 149 422-10506 171 426-57003 201 432-01750 162 435-08002 160 407-47020 150 422-1066 171 426-57003 201 432-01750 162 435-08002 160 407-47020 150 422-1066 171 426-57003 201 432-01750 161 435-08002 160 407-4705 150 422-1066 171 427-00041 174 432-02005 161 435-08002 160 407-4705 150 422-1066 171 427-00041 174 432-02005 161 435-08003 160 407-4705 149 422-1076 172 427-00052 174 432-02015 160 437-00001 160 407-4705 149 422-1076 172 427-00052 174 432-02015 160 437-00003 160 407-47013 149 422-10200 170 427-26000 174 432-02018 160 437-00003 160 407-70130 148 422-12200 170 427-26000 174 432-02028 160 437-40006 160 407-70132 148 422-12207 170 427-58924 174 432-02028 160 437-40006 160 407-70130 148 422-12200 170 427-58926 174 432-02028 160 437-40002 207 407-83230 147 422-12101 171 427-8926 174 432-02028 160 437-40002 207 407-83230 148 422-13020 178 428-37304 200 432-0161 161 441-02020 207 407-83230 148 422-13020 178 428-37304 200 432-0161 163 441-02020 207 407-83230 148 422-13000 178 428-37304 200 432-0161 163 441-02020 207 407-83230 148 422-13000 178 428-37304 200 432-0161 163 441-02020 207 407-83230 148 422-13000 178 428-37304 200 432-1218 163 444-02020 207 407-83230 148 422-13000 178 428-37304 200 432-1218 163 444-02020 207 407-83230 148 422-13000 178 428-37304 200 432-1218 163 444-02020 207 407-83230 148 422-13000 178 428-37300 200 432-1218 163 444-02020 207 407-83230 148 422-13000 178 428-37300 200 432-1218 163 444-02020 207 407-83230 148 422-13000 178 428-37300 200 432-1218 163 444-02000 200 447-39300 178 428-37300 200 432-1318 163 444-02000 200 447-39300 178 428-37300 200 432-1318 163 444-02000 200	406-60300202	422-11000170	426-35333201	429-90402181	435-06001160
406-60903 202 422-1105 171 426-53337 201 432-00751 162 435-06004 160 407-60908 202 422-11020 170 426-53703 201 432-00750 162 435-07001 160 407-02050 149 422-11040 170 426-57003 201 432-00750 162 435-07001 160 407-02000 149 422-11040 171 426-57004 201 432-00750 162 435-07001 160 407-03000 156 422-11050 171 427-0004 171 426-57003 201 432-00750 162 435-08000 160 407-47000 150 422-11060 171 427-00041 174 432-02000 161 435-08002 160 407-47035 150 422-11060 171 427-00041 174 432-02000 161 435-08002 160 407-47035 150 422-11065 171 427-00042 174 432-02008 161 437-00001 160 407-4703 149 422-11076 172 427-00042 174 432-02008 161 437-00001 160 407-4703 149 422-11076 170 427-52005 174 432-02008 161 437-00001 160 407-47015 149 422-12000 170 427-52000 174 432-02008 161 437-00001 160 407-47015 149 422-12000 170 427-52000 174 432-02008 161 437-00002 160 407-7015 148 422-12000 170 427-52000 174 432-02008 161 437-00002 160 407-7015 148 422-12000 170 427-52000 174 432-02008 160 437-00002 207 407-82306 141 422-12000 170 427-55926 174 432-02008 160 437-10000 207 407-82306 151 422-12000 170 427-55926 174 432-02008 160 437-10000 207 407-82306 151 422-1200 170 427-55926 174 432-02008 160 447-00002 207 407-82306 151 422-13000 178 428-37300 200 432-1210 161 441-00202 207 407-82306 151 422-13000 178 428-37308 200 432-1210 161 441-00202 207 407-82312 148 422-13000 178 428-37308 200 432-1210 163 441-8600 206 407-82312 148 422-13000 178 428-37308 200 432-1210 163 441-8600 206 407-90538 151 422-13000 178 428-37306 200 432-12108 163 441-8600 206 407-90538 151 422-13000 178 428-37306 200 432-12108 163 441-8000 209 407-82312 148 422-13000 178 428-37306 200 432-12108 163 443-00008 200 407-82512 148 422-13000 178 428-37306 200 432-12108 163 443-00008 200 407-82512 148 422-13000 178 428-30606 180 432-12128 163 443-00009 29 411-97806 147 422-13000 178 428-30607 180 432-12128 163 443-00009 29 411-97806 149 422-13000 170 428-0666 180 433-10200 162 443-00000 203 411-4000000 170 428-0666 180 433-10200 162 443-00000 203 411-4000000 170 428-0666 180 433-	406-60301202	422-11005170	426-35334201	429-90403181	435-06002160
406-6908. 202 422-1020. 170 426-35411. 200 432-00740. 162 435-00008. 160 407-03500. 156 422-1025. 172 426-37003. 201 432-00751. 162 435-00001. 160 407-03000. 149 422-11044. 171 426-37004. 201 432-00751. 162 435-00001. 160 407-03000. 149 422-11044. 171 426-37004. 201 432-00751. 162 435-08001. 160 407-46000. 156 422-11050. 171 426-37004. 201 432-00750. 161 435-08001. 160 407-47002. 150 422-11050. 171 427-00041. 174 432-02005. 161 435-08003. 160 407-47005. 150 422-11065. 171 427-00041. 174 432-02005. 161 435-08003. 160 407-47055. 150 422-11065. 171 427-00042. 174 432-02005. 161 435-08003. 160 407-47105. 149 422-12000. 170 427-12006. 173 432-02012. 160 437-00001. 160 407-47105. 149 422-12000. 170 427-12006. 173 432-02012. 160 437-00002. 160 407-47101. 149 422-12000. 170 427-26000. 174 432-02012. 160 437-00003. 160 407-17103. 148 422-12007. 170 427-26000. 174 432-02002. 160 437-10005. 160 407-70132. 148 422-12007. 170 427-35924. 174 432-02009. 160 437-10006. 160 407-70204. 166 422-1000. 170 427-35924. 174 432-02009. 160 437-10006. 160 407-70204. 166 422-1000. 170 427-35926. 174 432-02009. 160 437-10006. 160 407-70204. 167 422-1000. 170 427-45926. 174 432-02005. 160 437-10006. 160 407-70204. 167 422-1000. 170 427-35926. 174 432-02009. 160 437-10002. 207 407-82304. 147 422-12000. 178 428-37302. 200 432-02166. 161 441-00202. 207 407-82306. 151 422-13000. 178 428-37308. 200 432-02166. 161 441-00202. 207 407-82306. 151 422-13000. 178 428-37308. 200 432-12016. 161 441-00202. 207 407-82306. 151 422-13000. 178 428-37308. 200 432-12016. 163 441-98000. 206 407-99558. 151 422-13000. 178 428-37300. 200 432-12016. 163 441-98000. 206 407-99558. 151 422-13000. 178 428-37308. 200 432-12016. 163 441-98000. 206 407-99558. 151 422-13000. 178 428-37308. 200 432-12016. 163 441-98000. 206 407-99558. 151 422-13000. 178 428-37308. 200 432-12016. 163 441-98000. 206 407-99558. 151 422-13000. 178 428-37308. 200 432-12016. 163 441-98000. 206 407-99558. 151 422-13000. 178 428-90666. 180 432-12228. 163 443-00409. 299 407-95558. 160 443-00409. 29	406-60302202	422-11010170	426-35335201	432-00730162	435-06003160
407-00350	406-60303202	422-11015171	426-35337201	432-00731162	
407-02000 149 422-11040 170 426-37003 201 432-00751 162 435-07002 160 407-47000 1.56 422-11050 1.71 426-37003 201 432-01750 162 435-08001 160 407-47000 1.56 422-11050 1.71 427-00041 1.74 432-02000 161 435-08002 1.60 407-47020 1.50 422-110650 1.71 477-00041 1.74 432-02000 161 435-08002 1.60 407-4705 1.99 422-11065 1.71 477-0042 1.74 432-02008 161 435-08000 1.60 407-47105 1.99 422-11065 1.71 427-00042 1.74 432-02008 161 437-00001 1.60 407-47105 1.99 422-12000 1.70 427-00525 1.74 432-02012 1.60 437-00002 1.60 407-47105 1.99 422-12000 1.70 427-2000 1.74 432-02014 1.60 437-00002 1.60 407-70130 1.48 422-12020 1.70 427-26000 1.74 432-02028 1.60 437-13014 1.60 407-70132 1.48 422-12020 1.70 427-55924 1.74 432-02028 1.60 437-13014 1.60 407-70132 1.48 422-12090 1.70 427-55926 1.74 432-02029 1.60 437-13014 1.60 407-70130 1.50 407-2040 1.50 407-82306 1.51 422-13010 1.78 428-3730 200 432-02146 1.61 441-00202 207 407-82306 1.51 422-13010 1.78 428-3730 200 432-12014 1.63 441-00202 207 407-82310 1.48 422-13020 1.78 428-37304 200 432-12014 1.63 441-00202 207 407-82310 1.48 422-13040 1.78 428-3730 200 432-12014 1.63 441-00203 207 407-82312 1.48 422-13050 1.78 428-3730 200 432-12014 1.63 441-00203 207 407-82310 1.88 422-13040 1.78 428-3730 200 432-12114 1.63 441-00203 207 407-82310 1.88 422-13040 1.78 428-3730 200 432-12114 1.63 441-00203 207 407-82310 1.89 422-13050 1.78 428-3730 200 432-12114 1.63 441-00203 207 407-82310 1.89 422-13050 1.78 428-3730 200 432-12114 1.63 441-00203 209 408-0026 1.65 422-13050 1.78 428-3730 200 432-12114 1.63 441-00203 209 408-0026 1.65 422-13050 1.78 428-3730 200 432-1218 1.63 443-0008 302 411-6520 1.69 422-13050 1.78 428-3730 200 432-1218 1.63 443-0008 302 411-6520 1.69 422-13050 1.78 428-3730 200 432-1218 1.63 443-0008 302 411-6520 1.69 422-13050 1.78 429-06661 1.80 432-1228 1.63 443-0010 304 411-6520 1.69 422-13050 1.78 429-06661 1.80 432-1228 1.63 443-0009 2.99 411-6520 1.69 422-13050 1.78 429-06661 1.80 432-1228 1.63 443-0010 3.04 411-6520 2.99 422-13050 1.79 429-06661 1.80 432-1228 1.63 443-00	406-60908202	422-11020170	426-35411200	432-00740162	435-06008160
407-03000	407-00350156	422-11025172	426-35417200	432-00750162	435-07001160
407-47020	407-02000149	422-11040170	426-37003201	432-00751162	435-07002160
407-47020. 150	407-03000149	422-11044171	426-37004201	432-01750162	435-08001160
407-47053 150 422-11065 171 427-00042 174 432-02008 161 437-00001 160 407-4710 149 422-11076 172 427-00052 174 432-02018 160 437-00002 160 407-4710 149 422-12000 170 427-12026 173 432-02014 160 437-00003 160 407-70130 148 422-12020 170 427-25000 174 432-02028 150 437-13004 160 407-70132 148 422-12090 170 427-35926 174 432-02029 160 437-40005 160 407-72040 156 422-12090 170 427-35926 174 432-02029 160 437-40002 207 407-82304 147 422-1210 171 427-45926 74 432-02035 160 441-00020 207 407-82304 147 422-13010 178 428-37304 200 432-12012 163 441-00200 207 407-82310 148 422-13020 178 428-37304 200 432-12012 163 441-00200 207 407-82310 148 422-13030 178 428-37304 200 432-12014 163 441-36000 206 407-90538 151 422-13040 178 428-37301 200 432-1218 163 441-3600 206 407-90538 151 422-13050 178 428-37310 200 432-12180 163 443-00088 302 407-93566 147 422-13050 178 428-37310 200 432-12180 163 443-00088 302 407-93566 147 422-13050 178 428-37310 200 432-1218 163 443-00088 302 407-93566 147 422-13050 178 428-37310 200 432-1218 163 443-00048 302 408-0016 165 422-13075 178 428-37320 200 432-1218 163 443-01010 304 408-0016 165 422-13075 178 428-37310 200 432-1218 163 443-01010 304 408-0016 165 422-13075 178 429-00671 180 432-12280 163 443-01001 304 408-0016 165 422-13000 178 429-00671 180 432-12280 163 443-01010 304 408-0016 165 422-13000 178 429-00671 180 432-12280 163 443-01010 304 408-0016 165 422-13000 178 429-00671 180 432-12280 162 443-01504 299 411-9260 429-1601 180 432-12280 162 443-01504 299 411-9260 429-1601 180 432-12280 162 443-01504 299 411-9260 429-1601 180 432-12280 16	407-46000156	422-11050171	426-37103201	432-02000161	435-08002160
407-47105. .149 422-10766. .172 427-00052. .174 432-02012. .160 437-00002. .160 407-47110. .149 422-12000. .170 427-12026. .173 432-02014. .160 437-00003. .160 407-70130. .148 422-12070. .170 427-25904. .174 432-02029. .160 437-40005. .160 407-72040. .156 422-12090. .170 427-35924. .174 432-02035. .160 437-40006. .160 407-82304. .147 422-15010. .178 428-37302. .200 432-0216. .161 .441-00020. .207 407-82306. .151 422-15010. .178 428-37302. .200 432-12012. .163 .441-00202. .207 407-82312. .148 422-15030. .178 428-37308. .200 .432-12014. .163 .441-36600. .206 407-82320. .148 422-15000. .178 428-37310. .200	407-47020150	422-11060171	427-00041174	432-02005161	435-08003160
407-47110. 149 422-12000. 170 427-12066. 173 432-02014. 160 437-00003. 160 407-70130. 148 422-12070. 170 427-26000. 174 432-02028. 160 437-40006. 160 407-72040. 156 422-12090. 170 427-35926. 174 432-02055. 160 441-00002. 207 407-82306. 151 422-12100. 178 428-37302. 200 432-02166. 161 441-00202. 207 407-82306. 148 422-13000. 178 428-37304. 200 432-12012. 163 441-00220. 207 407-82310. 148 422-13000. 178 428-37304. 200 432-12016. 163 441-38600. 206 407-82320. 148 422-13040. 178 428-37310. 200 432-12180. 163 443-6008. 302 407-93766. 147 422-13050. 178 428-37310. 200 432-12180. 1	407-47053150	422-11065171	427-00042174	432-02008161	437-00001160
407-70130	407-47105149	422-11076172	427-00052174	432-02012160	437-00002160
407-70132	407-47110149	422-12000170	427-12026173		437-00003160
407-72040 156 422-12090 .170 427-35926 .174 432-02035 .160 441-00002 .207 407-82304 .147 422-12110 .171 427-45926 .174 432-02146 .161 .441-00202 .207 407-82305 .151 422-15102 .178 428-37302 .200 432-12101 .163 .441-00220 .207 407-82310 .148 422-13030 .178 428-37308 .200 432-12101 .163 .441-38600 .206 407-90538 .151 422-13050 .178 428-37312 .200 432-12180 .163 .441-38600 .206 407-93766 .147 422-13060 .178 428-37312 .200 432-12180 .163 443-00409 .299 408-0016 .165 422-1500 .178 428-37312 .200 432-12180 .163 .443-0104 .90 411-65201 .268 422-1500 .178 428-37312 .200 432-12180 .1	407-70130148	422-12020170	427-26000174	432-02028160	437-13014160
407-82304 .147 422-1210 .171 427-45926 .174 432-02146 .161 .441-00202 .207 407-82306 .151 422-1300 .178 428-37302 .200 432-02167 .161 .441-00220 .207 407-82312 .148 422-13030 .178 428-37308 .200 432-12014 .163 .441-38600 .206 407-82312 .148 422-13030 .178 428-37310 .200 432-12114 .163 .441-38600 .206 407-90538 .151 422-13060 .178 428-37310 .200 432-12183 .163 .443-00088 .302 407-93766 .147 422-13060 .178 428-37316 .200 432-12183 .163 .443-00409 .299 408-0016 .165 422-1300 .178 428-37320 .200 432-1214 .165 .443-01014 .200 408-0016 .165 422-13100 .178 428-01601 .180 432-12214	407-70132148	422-12070170	427-35924174	432-02029160	437-40006160
407-82306 .151 422-13010 .178 428-37302 .200 432-02167 .161 441-00220 .207 407-82310 .148 422-13020 .178 428-37308 .200 432-12012 .163 441-00230 .207 407-82320 .148 422-13040 .178 428-37308 .200 432-12178 .163 .441-38601 .206 407-90538 .151 422-13050 .178 428-37310 .200 432-12178 .163 .441-38601 .206 407-93766 .147 422-13050 .178 428-37310 .200 .432-12180 .163 .443-00088 .302 .407-93766 .147 422-13060 .178 428-37316 .200 .432-12180 .163 .443-00409 .299 .408-0016 .165 .422-13090 .178 .428-37320 .200 .432-12181 .163 .443-00409 .299 .408-0016 .165 .422-13090 .178 .429-00441 .180 .432-12278 .163 .443-0101 .304 .408-0016 .165 .422-13090 .178 .429-00441 .180 .432-12280 .163 .443-01504 .299 .411-95840 .268 .422-1300 .178 .429-01661 .180 .432-12280 .163 .443-01504 .299 .411-97840 .268 .422-1300 .172 .429-08074 .182 .432-12280 .163 .443-01504 .298 .417-12612 .49 .422-34549 .206 .429-08075 .182 .432-12490 .162 .443-03504 .298 .417-12613 .49 .422-44580 .172 .429-08076 .182 .433-01950 .162 .443-03504 .298 .417-12614 .49 .422-17650 .207 .429-08077 .182 .433-01950 .162 .443-04002 .299 .417-12616 .49 .422-17650 .207 .429-08078 .180 .433-02022 .162 .443-05034 .291 .417-12618 .49 .422-17650 .207 .429-10801 .186 .433-02022 .162 .443-05034 .291 .417-12618 .49 .422-34549 .206 .429-11900 .186 .433-02022 .162 .443-05034 .291 .417-12618 .49 .422-34549 .206 .429-11900 .186 .433-02022 .162 .443-05034 .291 .417-12618 .49 .422-34549 .206 .429-11900 .186 .433-02022 .162 .443-08514 .292 .417-12618 .49 .422-35327 .200 .429-15266 .182 .433-02053 .163 .443-09383 .304 .417-13004 .49 .424-35329 .200 .429-15266 .182 .433-02053 .163 .44	407-72040156	422-12090170	427-35926174	432-02035160	441-00002207
407-82310	407-82304147	422-12110171	427-45926174	432-02146161	441-00202207
407-82312 .148 422-13030 .178 428-37308 .200 432-12014 .163 .441-38600 .206 407-82320 .148 422-13040 .178 428-37312 .200 432-12180 .163 .441-38601 .206 407-93766 .147 422-13060 .178 428-37316 .200 .432-12183 .163 .443-00409 .299 408-0016 .165 422-13075 .178 428-37320 .200 .432-12183 .163 .443-01010 .304 408-00116 .165 .422-13075 .178 .429-00441 .80 .432-12278 .163 .443-01010 .304 408-00116 .165 .422-13090 .178 .429-00401 .180 .432-12280 .163 .443-01074 .299 411-65201 .268 .422-13100 .178 .429-06661 .180 .432-12280 .163 .443-01764 .299 417-2612 .49 .422-34549 .206 .429-08075 .182 .432-12490 </td <td>407-82306151</td> <td>422-13010178</td> <td>428-37302200</td> <td>432-02167161</td> <td>441-00220207</td>	407-82306151	422-13010178	428-37302200	432-02167161	441-00220207
407-82320 148 422-13040 178 428-37310 .200 432-12178 .163 441-38601 .206 407-99538 151 422-13060 178 428-37312 .200 432-12183 .163 443-00088 .302 408-00026 165 422-13050 178 428-37320 .200 432-12184 .163 443-01010 .304 408-0016 165 422-13090 178 428-37320 .200 432-1228 .163 443-01101 .304 408-0016 165 422-13090 178 429-01601 .180 432-12280 .163 443-01504 .299 411-9520 268 422-13100 .78 429-06661 .180 432-12280 .163 443-01504 .299 417-2612 49 422-34549 .206 429-08075 .182 432-12490 .162 443-01804 .298 417-2613 49 422-40801 .173 429-08077 .182 433-01955 .162 4	407-82310148	422-13020178	428-37304200	432-12012163	441-00230207
407-90538 151 422-13050 178 428-37312 .200 432-12180 .163 443-00088 .302 407-93766 147 422-13060 178 428-37316 .200 432-12183 .163 443-00099 .299 408-00016 165 422-13075 178 428-37320 .200 432-1218 .163 443-01101 .304 408-00116 165 422-13000 178 429-00441 .180 432-12280 .163 443-01504 .299 411-65201 268 422-15000 .770 429-06661 .180 432-12280 .163 443-01504 .299 417-0020 .165 422-1700 .772 429-08074 .182 432-12490 .162 443-03504 .298 417-12612 .49 422-34549 .206 429-08075 .182 432-12492 .162 .433-03504 .298 417-12613 .49 422-47180 .172 429-08077 .182 433-01950 .162	407-82312148	422-13030178	428-37308200	432-12014163	441-38600206
407-93766 .147 422-13060 .178 428-37316 .200 432-12183 .163 443-00409 .299 408-0016 .165 422-13090 .178 428-37320 .200 432-12214 .163 443-01101 .304 408-0016 .165 422-13090 .178 429-01601 .180 432-12280 .163 443-01704 .299 411-65201 .268 422-16200 .170 429-01661 .180 432-12280 .163 443-01504 .299 417-97840 .268 422-16200 .170 429-06661 .180 432-12280 .163 443-01504 .299 417-12612 .49 422-34549 .206 429-08075 .182 432-12492 .162 443-03504 .298 417-12613 .49 422-47180 .173 429-08075 .182 433-01950 .162 443-05504 .298 417-12614 .49 422-71650 .207 429-08075 .182 433-01950 .162 </td <td>407-82320148</td> <td>422-13040178</td> <td>428-37310200</td> <td>432-12178163</td> <td>441-38601206</td>	407-82320148	422-13040178	428-37310200	432-12178163	441-38601206
408-00026 .165 422-13075 .178 428-37320 .200 432-12214 .163 .443-01101 .304 408-00116 .165 422-13090 .178 429-00441 .180 432-12278 .163 .443-01274 .290 411-65201 .268 422-16200 .170 429-06661 .180 432-12280 .163 .443-01504 .293 417-00020 .165 422-17200 .172 429-08074 .182 432-12490 .162 .443-01804 .298 417-12612 .49 422-34549 .206 429-08075 .182 .432-12492 .162 .443-03504 .298 417-12613 .49 422-47800 .172 .429-08075 .182 .433-01950 .162 .443-03514 .298 417-12614 .49 .422-47180 .173 .429-08075 .182 .433-01950 .162 .443-03514 .298 417-12614 .49 .422-71655 .207 .429-08077 .182 .433-01950	407-90538151	422-13050178	428-37312200	432-12180163	443-00088302
408-00116 .165 422-13090 .178 429-00441 .180 432-12278 .163 443-01274 .290 411-65201 .268 422-13100 .178 429-01601 .180 432-12280 .163 443-01504 .299 411-97840 .268 422-12700 .172 429-08674 .182 432-12280 .163 443-01804 .298 417-02020 .165 422-17270 .172 429-08075 .182 432-12490 .162 443-03504 .298 417-12613 .49 422-40801 .172 429-08075 .182 433-01950 .162 443-03514 .298 417-12614 .49 422-47180 .173 429-08077 .182 433-01957 .162 443-03514 .298 417-12614 .49 422-71650 .207 429-08837 .180 433-01957 .162 443-03514 .298 417-12616 .49 422-71655 .207 429-10108 .180 433-02022 .162<	407-93766147	422-13060178	428-37316200	432-12183163	443-00409299
411-65201 268 422-13100 178 429-01601 180 432-12280 163 443-01504 299 411-97840 268 422-16200 170 429-06661 180 432-12282 163 443-01764 293 417-00020 165 422-17200 172 429-08075 182 432-12490 162 443-01804 298 417-12612 49 422-34549 206 429-08075 182 432-12492 162 443-03504 298 417-12613 49 422-40801 172 429-08075 182 433-01950 162 443-03514 298 417-12614 49 422-47180 173 429-08077 182 433-01957 162 443-03514 298 417-12616 49 422-71650 207 429-08837 180 433-01957 162 443-05034 291 417-12616 49 422-71650 207 429-10100 186 433-02020 162 443-08234	408-00026165	422-13075178	428-37320200	432-12214163	443-01101304
411-97840 268 422-16200 .170 429-06661 .180 432-12282 .163 443-01764 .293 417-00020 .165 422-17200 .172 429-08074 .182 432-12490 .162 443-01804 .298 417-12612 .49 422-34549 .206 429-08075 .182 432-12492 .162 .443-03504 .298 417-12613 .49 422-40801 .172 429-08076 .182 .433-01957 .162 .443-03514 .298 417-12614 .49 .422-71650 .207 .429-08077 .182 .433-01957 .162 .443-05034 .291 417-12615 .49 .422-71650 .207 .429-08837 .180 .433-01958 .162 .443-05034 .291 417-12616 .49 .422-71650 .207 .429-08837 .180 .433-02020 .162 .443-08234 .291 417-12617 .49 .422-94549 .206 .429-11900 .186 .433-02025	408-00116165		429-00441180		443-01274290
417-00020 165 422-17200 .172 429-08074 .182 432-12490 .162 443-01804 .298 417-12612 .49 422-34549 .206 429-08075 .182 432-12492 .162 .443-03504 .298 417-12613 .49 422-40801 .172 429-08076 .182 433-01957 .162 .443-05314 .298 417-12614 .49 422-71650 .207 .429-08077 .182 .433-01957 .162 .443-04002 .299 417-12615 .49 .422-71655 .207 .429-08077 .180 .433-01958 .162 .443-05034 .291 417-12616 .49 .422-71655 .207 .429-10108 .180 .433-02020 .162 .443-05034 .291 417-12617 .49 .422-94549 .206 .429-11900 .186 .433-02022 .162 .443-08514 .292 417-12618 .49 .423-50101 .173 .429-15230 .182 .433-02023	411-65201268	422-13100178	429-01601180	432-12280163	443-01504299
417-12612 .49 422-34549 .206 429-08075 .182 432-12492 .162 .443-03504 .298 417-12613 .49 422-40801 .172 429-08076 .182 .433-01950 .162 .443-03514 .298 417-12614 .49 422-47180 .173 429-08077 .182 .433-01957 .162 .443-04002 .299 417-12615 .49 422-71655 .207 .29-08837 .180 .433-02020 .162 .443-08234 .291 417-12616 .49 .422-71655 .207 .29-10108 .80 .433-02020 .162 .443-08234 .291 417-12617 .49 .422-94549 .206 .429-11900 .86 .433-02022 .162 .443-08514 .292 417-12618 .49 .423-00101 .173 .429-15230 .182 .433-02023 .162 .443-08514 .292 417-12619 .49 .424-35327 .200 .429-15239 .182 .433-02023		422-16200170	429-06661180		
417-12613 49 422-40801 172 429-08076 182 433-01950 162 443-03514 298 417-12614 49 422-47180 173 429-08077 182 433-01957 162 443-04002 299 417-12615 49 422-71650 207 429-08837 180 433-01958 162 443-05034 291 417-12616 49 422-71655 207 429-10108 180 433-02020 162 443-08234 291 417-12617 49 422-94549 206 429-11900 186 433-02022 162 443-08234 291 417-12618 49 423-00101 173 429-15230 182 433-02023 162 443-08514 292 417-12619 49 424-35327 200 429-15239 182 433-02053 163 443-09587 303 417-13003 49 424-35427 200 429-35111 201 433-02055 163 443-16234 <td< td=""><td>417-00020165</td><td></td><td>429-08074182</td><td>432-12490162</td><td></td></td<>	417-00020165		429-08074182	432-12490162	
417-12614 49 422-47180 173 429-08077 182 433-01957 162 443-04002 .299 417-12615 49 422-71650 207 429-08837 180 433-01958 162 443-05034 .291 417-12616 49 422-71655 207 429-10108 180 433-02020 162 443-08234 .291 417-12617 49 422-94549 206 429-11900 186 433-02022 162 443-08514 .292 417-12618 49 423-00101 173 429-15230 182 433-02023 162 443-08514 .292 417-12619 49 424-35327 200 429-15266 182 433-02053 163 443-09587 303 417-13003 49 424-35329 200 429-35111 201 433-02054 163 443-16234 .292 417-13004 49 424-35429 200 429-3			429-08075182	432-12492162	443-03504298
417-12615 .49 422-71650 .207 429-08837 .180 433-01958 .162 .443-05034 .291 417-12616 .49 422-71655 .207 429-10108 .180 .433-02020 .162 .443-08234 .291 417-12617 .49 .422-94549 .206 .429-11900 .186 .433-02022 .162 .443-08514 .292 417-12618 .49 .423-00101 .173 .429-15230 .182 .433-02023 .162 .443-09557 .303 417-13003 .49 .424-35329 .200 .429-15239 .182 .433-02053 .163 .443-09587 .303 417-13003 .49 .424-35329 .200 .429-15266 .182 .433-02053 .163 .443-09983 .304 417-13004 .49 .424-35427 .200 .429-35111 .201 .433-02055 .163 .443-16234 .292 417-13005 .49 .424-35429 .200 .429-35113 .201 .433-25431<	417-1261349	422-40801172	429-08076182	433-01950162	
417-12616 .49 422-71655 .207 429-10108 .180 433-02020 .162 443-08234 .291 417-12617 .49 422-94549 .206 429-11900 .186 433-02022 .162 443-08514 .292 417-12618 .49 423-00101 .173 429-15230 .182 433-02023 .162 443-09557 .303 417-12619 .49 424-35327 .200 429-15239 .182 433-02053 .163 443-09587 .303 417-13003 .49 424-35329 .200 429-15266 .182 433-02054 .163 443-09587 .303 417-13004 .49 424-35427 .200 429-35111 .201 433-02055 .163 443-16234 .292 417-16210 .49 424-35460 .200 429-35113 .201 433-25430 .164 443-18134 .290 417-39120 .48 425-35321 .199 429-35127 .201 433-25805 .165		422-47180173	429-08077182	433-01957162	443-04002299
417-12617 49 422-94549 206 429-11900 186 433-02022 162 443-08514 292 417-12618 49 423-00101 173 429-15230 182 433-02023 162 443-09557 303 417-12619 49 424-35327 200 429-15239 182 433-02053 163 443-09587 303 417-13003 49 424-35329 200 429-15266 182 433-02054 163 443-09983 304 417-13004 49 424-35427 200 429-35111 201 433-02055 163 443-16234 292 417-13005 49 424-35429 200 429-35113 201 433-25430 164 443-16235 292 417-16210 49 424-35460 200 429-35119 201 433-25431 164 443-18134 290 417-39120 48 425-35321 199 429-35129 201 433-81505 165 443-18834 <td< td=""><td></td><td></td><td></td><td>433-01958162</td><td>443-05034291</td></td<>				433-01958162	443-05034291
417-12618 49 423-00101 173 429-15230 182 433-02023 162 443-09557 303 417-12619 49 424-35327 200 429-15239 182 433-02053 163 443-09587 303 417-13003 49 424-35329 200 429-15266 182 433-02054 163 443-09983 304 417-13004 49 424-35427 200 429-35111 201 433-02055 163 443-16234 292 417-13005 49 424-35429 200 429-35113 201 433-25430 164 443-16235 292 417-16210 49 424-35460 200 429-35119 201 433-25431 164 443-18134 290 417-16211 49 425-35105 199 429-35127 201 433-25431 164 443-18834 291 417-39120 48 425-35321 199 429-35129 201 433-81505 163 443-62801 289 417-39121 48 425-35325 199 429-35218 <td< td=""><td></td><td></td><td></td><td></td><td></td></td<>					
417-12619 49 424-35327 200 429-15239 182 433-02053 163 443-09587 303 417-13003 49 424-35329 200 429-15266 182 433-02054 163 443-09983 304 417-13004 49 424-35427 200 429-35111 201 433-02055 163 443-16234 292 417-13005 49 424-35429 200 429-35113 201 433-25430 164 443-16235 292 417-16210 49 424-35460 200 429-35119 201 433-25431 164 443-18134 290 417-16211 49 425-35105 199 429-35127 201 433-35805 165 443-18834 291 417-39120 48 425-35321 199 429-35129 201 433-81505 163 443-19004 293 417-39121 48 425-35323 199 429-35206 201 433-81515 163 443-62801 289 417-39202 48 425-35421 199 429-35218 <td< td=""><td></td><td>422-94549206</td><td>429-11900186</td><td>433-02022162</td><td>443-08514292</td></td<>		422-94549206	429-11900186	433-02022162	443-08514292
417-13003 49 424-35329 200 429-15266 182 433-02054 163 443-09983 304 417-13004 49 424-35427 200 429-35111 201 433-02055 163 443-16234 292 417-13005 49 424-35429 200 429-35113 201 433-25430 164 443-16235 292 417-16210 49 424-35460 200 429-35119 201 433-25431 164 443-18134 290 417-16211 49 425-35105 199 429-35127 201 433-25431 164 443-18134 290 417-39120 48 425-35105 199 429-35129 201 433-35805 165 443-1834 291 417-39121 48 425-35323 199 429-35206 201 433-81511 163 443-62801 289 417-39122 48 425-35325 199 429-35218 201 433-81515 163 443-64501 289 417-39202 48 425-35421 199 429-35218	417-1261849				
417-13004 .49 424-35427 .200 429-35111 .201 433-02055 .163 .443-16234 .292 417-13005 .49 424-35429 .200 429-35113 .201 433-25430 .164 .443-16235 .292 417-16210 .49 424-35460 .200 429-35119 .201 433-25431 .164 .443-18134 .290 417-16211 .49 .425-35105 .199 .429-35127 .201 .433-35805 .165 .443-18834 .291 417-39120 .48 .425-35321 .199 .429-35129 .201 .433-81505 .163 .443-19004 .293 417-39121 .48 .425-35323 .199 .429-35206 .201 .433-81511 .163 .443-62801 .289 417-39122 .48 .425-35325 .199 .429-35211 .201 .433-81515 .163 .443-64501 .289 417-39202 .48 .425-35421 .199 .429-35218 .201 .433-81555 .163 .443-90201 .304 421-00098 .174 .42					
417-13005 49 424-35429 200 429-35113 201 433-25430 164 443-16235 292 417-16210 49 424-35460 200 429-35119 201 433-25431 164 443-18134 290 417-16211 49 425-35105 199 429-35127 201 433-35805 165 443-18834 291 417-39120 48 425-35321 199 429-35129 201 433-81505 163 443-19004 293 417-39121 48 425-35323 199 429-35206 201 433-81511 163 443-62801 289 417-39122 48 425-35325 199 429-35211 201 433-81515 163 443-64501 289 417-39202 48 425-35421 199 429-35218 201 433-81515 163 443-90201 304 421-00098 174 425-35423 199 429-35219 201 434-02110 161 443-91825 289 421-12904 188 426-35110 201 429-35230 <	417-1300349		429-15266182	433-02054163	443-09983304
417-16210					
417-16211					
417-39120 48 425-35321 199 429-35129 201 433-81505 163 443-19004 293 417-39121 48 425-35323 199 429-35206 201 433-81511 163 443-62801 289 417-39122 48 425-35325 199 429-35211 201 433-81515 163 443-64501 289 417-39202 48 425-35421 199 429-35218 201 433-81555 163 443-90201 304 421-00098 174 425-35423 199 429-35219 201 434-02110 161 443-91825 289 421-00100 174 425-35425 199 429-35229 201 434-02120 161 443-9220 293 421-12904 188 426-35110 201 429-35230 200 435-0015 161 443-92801 302 421-38620 174 426-35310 200 429-35532 201 435-00125 161 443-95207 302 422-10100 171 426-35311 200 429-35832					
417-39121 48 425-35323 199 429-35206 201 433-81511 163 443-62801 289 417-39122 48 425-35325 199 429-35211 201 433-81515 163 443-64501 289 417-39202 48 425-35421 199 429-35218 201 433-81555 163 443-90201 304 421-00098 174 425-35423 199 429-35219 201 434-02110 161 443-91825 289 421-00100 174 425-35425 199 429-35229 201 434-02120 161 443-92220 293 421-12904 188 426-35110 201 429-35230 200 435-0015 161 443-92801 302 421-38620 174 426-35310 200 429-35529 201 435-00125 161 443-95207 302 422-10100 171 426-35311 200 429-35832 201 435-01120 161 444-01220 296					
417-39122 48 425-35325 199 429-35211 201 433-81515 163 443-64501 289 417-39202 48 425-35421 199 429-35218 201 433-81555 163 443-90201 304 421-00098 174 425-35423 199 429-35219 201 434-02110 161 443-91825 289 421-00100 174 425-35425 199 429-35229 201 434-02120 161 443-92220 293 421-12904 188 426-35110 201 429-35230 200 435-00015 161 443-92801 302 421-38620 174 426-35310 200 429-35529 201 435-00125 161 443-95207 302 422-10100 171 426-35311 200 429-35832 201 435-01120 161 444-01220 296					
417-39202 48 425-35421 199 429-35218 201 433-81555 163 443-90201 304 421-00098 174 425-35423 199 429-35219 201 434-02110 161 443-91825 289 421-00100 174 425-35425 199 429-35229 201 434-02120 161 443-92220 293 421-12904 188 426-35110 201 429-35230 200 435-00015 161 443-92801 302 421-38620 174 426-35310 200 429-35529 201 435-00125 161 443-95207 302 422-10100 171 426-35311 200 429-35832 201 435-01120 161 444-01220 296					
421-00098 .174 425-35423 .199 429-35219 .201 434-02110 .161 443-91825 .289 421-00100 .174 425-35425 .199 429-35229 .201 434-02120 .161 443-92220 .293 421-12904 .188 426-35110 .201 429-35230 .200 435-00015 .161 443-92801 .302 421-38620 .174 426-35310 .200 429-35529 .201 435-00125 .161 443-95207 .302 422-10100 .171 426-35311 .200 429-35832 .201 435-01120 .161 444-01220 .296					
421-00100 .174 425-35425 .199 429-35229 .201 434-02120 .161 443-92220 .293 421-12904 .188 426-35110 .201 429-35230 .200 435-00015 .161 443-92801 .302 421-38620 .174 426-35310 .200 429-35529 .201 435-00125 .161 443-95207 .302 422-10100 .171 426-35311 .200 429-35832 .201 435-01120 .161 444-01220 .296					
421-12904					
421-38620 174 426-35310 200 429-35529 201 435-00125 161 443-95207 302 422-10100 171 426-35311 200 429-35832 201 435-01120 161 444-01220 296					
422-10100171 426-35311200 429-35832201 435-01120161 444-01220296					
422-101011/2 426-3531/200 429-36455205 435-02480163 444-01221296					
	422-101011/2	426-3531/200	429-36455205	435-02480163	444-01221296



444-01222295	451-00210333	451-05002335	452-00215168	452-00516168
444-01223296	451-00212333	451-05003335	452-00216168	452-00517168
444-01224295	451-00214333	451-05510166	452-00217168	452-00518168
444-01225296	451-00216333	451-06000337	452-00218168	452-00519168
444-01226295	451-00250337	451-07000337	452-00219168	452-00520168
444-01227295	451-00255166	451-10003337	452-00220168	452-00521168
444-01228295	451-00275166	451-14128166	452-00221168	452-00522168
444-01229295	451-00300337	451-15405337	452-00222168	452-00523168
444-01230295	451-00400337	451-20516165	452-00223168	452-00524168
444-05500294	451-00440166	451-20605337	452-00224168	452-00525168
444-22019294	451-00500337	451-24128166	452-00225168	452-00526168
444-81354294	451-00551166	451-25805337	452-00226168	452-01100168
444-82961296	451-00603334	451-31005337	452-00401168	452-01101168
444-82963296	451-00604334	451-32016336	452-00402168	452-01102168
444-99719294	451-00606334	451-40004336	452-00403168	452-01103168
446-00027297	451-00608334	451-40006336	452-00404168	452-01104168
446-00056297	451-00610334	451-40008336	452-00405168	452-01105168
448-00001188	451-00612334	451-40010336	452-00406168	452-01106168
448-00010193	451-00614334	451-40012336	452-00407168	452-01107168
448-00100192	451-00616334	451-40013337	452-00408168	452-01108168
448-00101192	451-00618334	451-40016336	452-00409168	452-01109168
448-00200192	451-00620334	451-60021337	452-00410168	452-02100168
448-00201192	451-00640165	451-72305337	452-00411168	452-02101168
448-00202192	451-00707166	452-00001168	452-00412168	452-02102168
448-00301192	451-01203334	452-00011168	452-00413168	452-02103168
448-00400192	451-01204334	452-00012168	452-00414168	452-02104168
448-01100192	451-01206334	452-00014168	452-00415168	452-02105168
448-01101127	451-01208334	452-00100168	452-00416168	452-02106168
448-01102127	451-01210334	452-00101168	452-00417168	452-02107168
448-01103127	451-01212334	452-00102168	452-00418168	452-02108168
448-12100173	451-01214334	452-00103168	452-00419168	452-02109168
448-12320193	451-01216334	452-00104168	452-00420168	454-00190268
448-12880188	451-01640166	452-00105168	452-00421168	454-00200219
448-12894189	451-02640166	452-00106168	452-00422168	454-00209271
448-22320193	451-03011335	452-00107168	452-00423168	454-00599268
448-22894189	451-03012335	452-00108168	452-00424168	454-00712268
448-32320193	451-03013335	452-00109168	452-00425168	454-01410278
448-32894189	451-03022335	452-00112168	452-00426168	454-01420268
448-42894189	451-03023335	452-00114168	452-00501168	454-01599268
448-71000193	451-03034335	452-00201168	452-00502168	454-05127268
451-00006166	451-03223335	452-00202168	452-00503168	454-05131278
451-00013333	451-03224335	452-00203168	452-00504168	454-05300278
451-00026166 451-00036166	451-03232335	452-00204168	452-00505168	455-00003169
	451-03233335	452-00205168	452-00506168	455-00129169 455-00401169
451-00055166	451-04042334	452-00206168	452-00507168	
451-00101166	451-04043334	452-00207168	452-00508168	455-00402169 455-00403169
451-00150337	451-04044334	452-00208168	452-00509168	
451-00200337	451-04046334	452-00209168	452-00510168	455-00404169 455-00405169
451-00203333 451-00204333	451-04048334	452-00210168	452-00511168	
	451-04128166 451-04223334	452-00211168	452-00512168	455-00406169 455-00444169
451-00205333 451-00206333	451-04410334	452-00212168 452-00213168	452-00513168 452-00514168	455-04444169
451-00208333	451-05001335	452-00214168	452-00515168	455-12500169
451-00200333	431-03001333	432-00214108	432-00313108	455-12500108



455-15017169	461-01068241	461-09159241	462-06010245	464-00141255
455-15019169	461-01203241	461-09204241	462-06020245	464-00142255
458-00002371	461-01208241	461-09280241	462-06027246	464-00143255
458-00005371	461-01209241	461-09342241	462-06030245	464-00144255
458-00010371	461-01212241	461-09398241	462-06040245	464-00145255
458-00500371	461-01214241	461-09505241	462-07025246	464-00146255
458-00911371	461-01216241	461-10010225	462-08027246	464-00208259
458-03810371	461-01217241	461-10011225	462-09027246	464-00209259
458-03820371	461-01218241	461-10020225	462-11527246	464-00216262
458-04048371	461-01222241	461-10120225	462-16008247	464-00310255
459-54220167	461-01225241	461-10121225	463-00500246	464-00618254
459-54222167	461-01230241	461-10122225	463-00501246	464-00619254
459-61126167	461-01382241	461-11204241	463-00509246	464-00621254
459-61127167	461-01416245	461-11217241	463-00510246	464-00622254
459-61128167	461-01600245	461-17441243	463-00511246	464-00623254
459-61129167	461-02112241	461-17442243	463-00542246	464-00718254
459-80220167	461-02168241	461-20326222	463-00543246	464-01025254
459-80221167	461-02510241	461-20327222	463-00544246	464-01091255
459-80222167	461-03751241	461-20328222	463-00545246	464-01451255
459-80223167	461-05134241	461-20329222	463-00546246	464-01452255
459-80225167	461-05256241	461-20330222	463-00570246	464-01618254
459-80226167	461-05276241	461-20331222	463-00571246	464-02618254
459-80227167	461-05507241	461-21217241	463-00572246	464-05905254
459-80228167	461-05510241	461-21507240	463-00573246	464-10001255
459-80229167	461-05511241	461-29020240	463-00574246	464-10912255
459-80230167	461-05512241	461-29093240	463-00575246	464-10913255
459-80231167	461-05513241	461-31217241	463-01078247	465-00042265
459-80232167	461-05514241	461-33560223	463-01175247	465-00144257
459-80250167	461-05523241	461-33561223	463-01177247	465-00145257
459-80257167	461-05555241	461-33562223	463-01544246	465-00148257
459-80258167	461-05556241	461-41211245	463-01571248	465-00149257
459-80271167	461-05557241	461-41311245	463-01572248	465-00431256
459-85100167	461-05558241	461-41811245	463-01573248	465-00446256
461-00412245	461-05559241	461-59307227	463-05433246	465-00454256
461-00413245	461-05775241	461-59337227	463-05434246	465-00455256
461-00414245	461-06815241	461-59357227	463-05435246	465-00456265
461-00415245	461-06825241	461-59387227	463-05444246	465-00458256
461-00418245	461-06829241	462-00416245	463-05454246	465-00479256
461-00423245	461-07001240	462-00417247	463-05464246	465-00506256
461-00425245	461-07002240	462-00430247	463-05465246	465-00507256
461-00438245	461-07003240	462-00523247	463-05474246	465-00520265
461-00600245	461-07004240	462-00800245	463-15454246	465-00522256
461-00602245	461-07011240	462-00962247	463-54636246	465-00524265
461-00801245	461-09001241	462-01147247	464-00015254	465-00535256
461-00802245	461-09002241	462-01224247	464-00030254	465-00546256
461-01027241	461-09003241	462-01416248	464-00082259	465-00552256
461-01029241	461-09004241	462-01575248	464-00134255	465-00558256
461-01043241	461-09005241	462-01600248	464-00135255	465-00563256
461-01044241	461-09011241	462-02416247	464-00136255	465-00570263
461-01045241	461-09012241	462-03416248	464-00137255	465-00573256
461-01052241	461-09013241	462-04100246	464-00138255	465-00582256
461-01055241	461-09017241	462-05010247	464-00139255	465-00585263
461-01056241	461-09018241	462-06008247	464-00140255	465-00650256



465-00651	256	465-07103263	465-75040263	465-86225263	468-00050227
465-00652		465-07536265	465-75045263	465-86245263	468-00100257
465-00653		465-07601263	465-75080263	465-97711257	468-00101265
465-00654	256	465-07602263	465-75090263	465-97755257	468-00102250
465-00655	256	465-07940263	465-75115263	466-00200261	468-00103246
465-00656		465-07948263	465-75120263	466-00296262	468-00107250
465-00657		465-07949263	465-75135263	466-00525260	468-00150265
465-00658		465-08018263	465-75160263	466-00529260	468-00151257
465-00659	256	465-08019263	465-75170263	466-00625260	468-00201254
465-00660		465-08852263	465-75175263	466-00660260	468-00202254
465-00661	256	465-09440263	465-75180263	466-00675260	468-00203254
465-00662	256	465-09470263	465-75185263	466-00685260	468-00207250
465-00663	256	465-09903263	465-75190263	466-00800261	468-00216254
465-00664	256	465-10760259	465-75205263	466-00850259	468-00307246
465-00665	256	465-10761259	465-75210263	466-00851259	468-00330251
465-00666	256	465-10762259	465-75215263	466-00860260	468-00331251
465-00667	256	465-10763259	465-75225263	466-00890261	468-00341251
465-00668	256	465-10764259	465-75235263	466-00918259	468-00346251
465-00670	258	465-10780259	465-75245263	466-01050262	468-00347251
465-00671	258	465-10781259	465-75250263	466-01066262	468-00348251
465-00690	257	465-10782259	465-75295263	466-01533262	468-00349251
465-00691	257	465-11411257	465-75320263	466-01538262	468-00350251
465-00692		465-11455257	465-75610256	466-01543262	468-00356251
465-00693	257	465-11750259	465-81080263	466-01850261	468-00370252
465-00694		465-11751259	465-81090263	466-01870262	468-00371252
465-00695		465-11752259	465-81100263	466-03000261	468-00372252
465-00696		465-11790259	465-81200263	466-04000262	468-00373252
465-00702	256	465-11791259	465-81250263	466-05000262	468-00381252
465-00710		465-11792259	465-81320263	466-05311260	468-00382252
465-00994		465-30045256	465-81400263	466-06190260	468-00383252
465-01014		465-30060265	465-86015263	466-07910262	468-00389252
465-01418		465-33031265	465-86020263	466-08860262	468-00390252
465-01450		465-33069265	465-86025263	466-50910262	468-00391252
465-03009		465-40000259	465-86030263	466-70001264	468-00392252
465-04510		465-40001256	465-86032263	466-70002264	468-00393252
465-04512		465-40002256	465-86033263	466-70004264	468-00394252
465-04513		465-40003256	465-86040263	466-70010264	468-00395252
465-04524		465-40004256	465-86045263	466-70012264	468-00396252
465-04530		465-40005256	465-86050263	466-70013264	468-00397252
465-04532		465-40006256	465-86059263	466-70375264	468-00399253
465-04536	256	465-40007256	465-86060263	466-70380264	468-00400253
465-04645	256	465-40011259	465-86067263	466-70390264	468-00401253
465-04745	256	465-45105256	465-86072263	466-70700264	468-00402253
465-04985		465-70125256	465-86077263	466-70701264	468-00462246
465-05008		465-70255256	465-86080263	466-76000261	468-00556253
465-05112		465-70280256	465-86085263	466-96900261	468-00580265
465-05200		465-70285256	465-86090263	466-96901261	468-00607246
465-05410		465-71090256	465-86100263	467-00218254	468-00632250
465-05420		465-72212256	465-86107263	467-00220254	468-00634265
465-05922		465-72280256	465-86120263	467-00916254	468-00635228
465-06702		465-73212256	465-86125263	468-00006254	468-00650228
465-06703		465-75010263	465-86160263	468-00009254	468-00660228
465-06911		465-75035263	465-86187263	468-00010254	468-00680228



468-00686	251	468-13510252	469-00015231	469-01080231	469-09252231
468-00687		468-13511252	469-00018238	469-01090231	469-10110239
468-00688		468-13520252	469-00020238	469-01091231	469-10215236
468-00690	228, 250	468-13521252	469-00021238	469-01092231	469-10315236
468-00707	246	468-13530252	469-00030233	469-01093231	469-11115267
468-00765		468-13531252	469-00031231	469-01094231	469-15407266
468-00798	253	468-16541250	469-00035231	469-01095231	469-15415236
468-00808		468-17490242	469-00040266	469-01096231	469-15535236
468-01001	228	468-17491242	469-00044236	469-01097231	469-15720249
468-01032	251	468-17492242	469-00045233	469-01098231	469-17107242
468-01033	251	468-17493242	469-00065231	469-01100231	469-17140244
468-01034	251	468-17592242	469-00065233	469-01110231	469-17141244
468-01035	251	468-17593242	469-00081267	469-01115267	469-17144243
468-01037	251	468-17692242	469-00090233	469-01124266	469-17145244
468-01038	251	468-17792242	469-00131266	469-01130231	469-17198242
468-01039	251	468-20055227	469-00132266	469-01610265	469-17205242
468-01120	388	468-20495227	469-00133266	469-01638266	469-17206242
468-01390	252	468-20595227	469-00134266	469-01710265	469-17207242
468-01391	252	468-2069523	469-00200233	469-01810265	469-17208242
468-01392	252	468-20695227	469-00240235	469-01820238	469-17209242
468-01393	252	468-20795227	469-00241235	469-01910265	469-17210242
468-01462	246	468-20995227	469-00567267	469-01925233	469-17211242
468-02222		468-26451250	469-00580249	469-02020227	469-17212242
468-02462	246	468-2654123	469-00590249	469-02040231	469-17213242
468-04191	251	468-30007252	469-00607237	469-02045231	469-17214242
468-04361	253	468-30010252	469-00609267	469-02311166	469-17215242
468-05005		468-36541250	469-00612237	469-02312166	469-17216242
468-05093	246	468-40007252	469-00625266	469-02570248	469-17218242
468-06116		468-40010252	469-00630266	469-02572248	469-17221242
468-06300		468-4360723	469-00631265	469-02573248	469-17222242
468-06300		468-46541250	469-00632266	469-02925233	469-17223242
468-06541		468-56541250	469-00633266	469-03200226	469-17224242
468-07607		468-5901923, 2	27 469-00650228	469-03333266	469-17226242
468-08007		468-5902123, 2		469-04065239	469-17227242
468-08028	251	468-59023227	469-00680265	469-04700237	469-17228242
468-08500	250	468-59765245	469-00770233	469-05001226	469-17235242
468-10004		468-62410251	469-00771233	469-05262267	469-17236242
468-10010		468-62411251	469-00772233	469-05540237	469-17245228
468-10012		468-62412251	469-00773233	469-05565237	469-17246228
468-10013		468-62413251	469-00917235	469-05700249	469-17272242
468-10015	252	468-90597252	469-00919231	469-05720249	469-17275242
468-10017	251	468-90599252	469-00925231	469-06464221	469-17296242
468-10019	251	468-95911252	469-00950231	469-06900265	469-17311242
468-10039	252	468-99393245	469-00951231	469-06950265	469-17316242
468-10046		469-00001266	469-00992266	469-07000231	469-17317242
468-10054	252	469-00002267	469-01010231	469-07020231	469-17320242
468-10060	252	469-00003266	469-01030231	469-07100232	469-17321242
468-10100		469-00004267	469-01031231	469-07300232	469-17323242
468-10117		469-00005266	469-01040231	469-07415234	469-17392229
468-11700		469-00010265	469-01050231	469-08200239	469-17393229
468-12222		469-00011267	469-01060231	469-08909265	469-17395228
468-13500		469-00012267	469-01070231	469-08910238	469-17397228
468-13501		469-00014266	469-01077231	469-09251231	469-17398229



469-17415234	469-20283222	469-45020225	471-80133259	473-31440189
469-17420242	469-20284222	469-45030225	471-80135259	473-36016186
469-17446243	469-20635230	469-46001225	471-80139259	473-36017186
469-17447243	469-20698230	469-46002225	471-80145259	473-42561188
469-17448243	469-20798230	469-46003225	471-80149259	475-00891209
469-17449243	469-20895230	469-50812220	471-80151259	475-00892209
469-17450243	469-20898230	469-50816220	471-80157259	475-00893209
469-17452243	469-21010231	469-51632238	471-80163259	475-00894209
469-17539228	469-21020231	469-52000267	471-80169259	475-00895209
469-17590229	469-21057223	469-56100226	471-80215258	475-00896208
469-17591229	469-22005230	469-56102226	471-80225258	475-01892208
469-17596229	469-22008230	469-57100226	471-80449258	475-01893208
469-19860238	469-22011249	469-59132228	471-80451258	475-01894208
469-20002230	469-22012249	469-60000218	471-80457258	475-01895208
469-20004230	469-23430267	469-60012218	471-80463258	475-01896208
469-20006230	469-25078227	469-60024218	471-80469258	475-01897208
469-20007230	469-25080227	469-60812221	472-31710196	475-01898208
469-20009230	469-25082227	469-70360264	472-31713196	475-10509190
469-20010230	469-25083227	469-90660231	472-31810196	475-11590190
469-20012230	469-25415236	469-90661231	473-00005188	475-12532191
469-20013230	469-25535236	469-90662231	473-00010185	475-13011191
469-20014230	469-29021248	471-31432189	473-00011185	475-13018191
469-20015230	469-29022248	471-31433189	473-00013185	475-13019191
469-20017230	469-29023248	471-80001258	473-00015186	475-13021191
469-20018230	469-29621248	471-80002258	473-00020186	475-13022191
469-20019230	469-30000232	471-80003258	473-00100187	475-13026191
469-20020230	469-32011249	471-80004258	473-00103187	475-13027191
469-20022230	469-32012249	471-80005258	473-00106187	475-13028191
469-20023230	469-32850267	471-80006258	473-00110187	475-13029191
469-20025231	469-32851267	471-80007258	473-00207185	475-13030191
469-20030230	469-34000227	471-80008258	473-00500185	475-13031191
469-20031230	469-35415236	471-80009258	473-00501185	475-13032191
469-20032230	469-35934249	471-80010258	473-01110185	475-13033191
469-20035230	469-37100226	471-80011258	473-01113185	475-13034191
469-20036230	469-40100224	471-80012258	473-01118185	475-15090190
469-20037230	469-40110224	471-80014258	473-01500184	475-15103191
469-20038230	469-40130224	471-80015258	473-02501184	475-18001191
469-20039230	469-40450224	471-80016258	473-02505184	475-30280191
469-20040230	469-40600224	471-80017258	473-02510184	475-30281191
469-20041230	469-40630224	471-80018258	473-02511184	475-82515191
469-20043230	469-43001225	471-80019258	473-02513184	475-89001208
469-20046230	469-43002225	471-80020258	473-12913187	475-89003208
469-20047230	469-43003225	471-80021258	473-12914187	475-89004208
469-20049230	469-44001225	471-80022258	473-12915187	475-89103209
469-20097230	469-44002225	471-80023258	473-12916187	476-00001274
469-20130231	469-44003225	471-80024258	473-12917187	476-00002274
469-20140236	469-44101225	471-80025258	473-12919187	476-00003274
469-20144237	469-44102225	471-80112259	473-12920187	476-00135272
469-20250237	469-44103225	471-80115259	473-12921187	476-00165272
469-20279222	469-45001225	471-80116259	473-12923187	476-00185272
469-20280222	469-45002225	471-80120259	473-12930187	476-00250272
469-20281222	469-45003225	471-80125259	473-12941186	476-00255272
469-20282222	469-45010225	471-80129259	473-12942186	476-00274271



476-00276271	476-11048269	477-11237279	478-06172275	482-26467306
476-00290271	476-11135269	477-11239279	478-06173275	482-27404306
476-01046272	476-11148269	477-11240279	478-06174275	482-28147306
476-01941274	476-11155269	477-11612279	478-06175275	482-28414306
476-02555278	476-11185269	477-11623209	478-06176275	482-28415306
476-03238271	476-15038271	477-11624209	478-06190278	482-28444306
476-03501269	476-17275272	477-34020284	478-06293276	482-29452306
476-03502273	476-17285272	477-35020284	478-06585276	482-29460306
476-05602274	476-27275272	477-47732283	478-06999275	482-29462306
476-05603274	476-30377271	477-49515284	478-10013278	482-29471306
476-05604274	476-32380271	477-72623281	478-16174275	482-29895306
476-05900272	476-35020273	477-72629281	478-16999275	483-08002308
476-05988272	476-35021273	477-76023281	478-32072277	483-08005308
476-07125272	476-37285272	477-76029281	479-02130210	483-08027308
476-07212274	477-00001282	477-76063281	479-02220210	483-08047308
476-07213274	477-00002282	477-76069281	479-02240210	483-08065308
476-07215274	477-00003282	477-8482064	479-02260210	483-21982307
476-07226274	477-00004282	478-00001276	479-36001211	483-24433307
476-07229274	477-00005282	478-00305276	479-36002211	483-24486307
476-07230274	477-00008282	478-00315276	479-36003212	483-25403307
476-07233272	477-00009282	478-00322278	479-36004212	483-25406307
476-07248274	477-00010282	478-00325276	479-36005211	483-25433307
476-07262272	477-00011282	478-00326278	479-36006211	483-27382305
476-07263274	477-00012282	478-00328278	479-36011211	483-27383305
476-07275272	477-00014282	478-00335276	479-36013211	483-27385305
476-07277274	477-00015282	478-00340276	479-36014213	483-27387305
476-07278274	477-00020282	478-00345277	479-36015211	483-27389305
476-07285272	477-00033282	478-00346277	479-36111213	483-29821307
476-07290274	477-00066282	478-00360209	479-36112213	483-29827307
476-08500273	477-00099282	478-00377278	479-36115213	483-40001309
476-08501273	477-00111282	478-00707276	479-36201211	483-40014306
476-08860273	477-00112282	478-00820208	479-36211211	483-40015308
476-08900273	477-00113282	478-01330276	479-46001212	483-40045308
476-10100269	477-00115282	478-01335276	479-46002212	483-40047308
476-10105269	477-00118282	478-01340276	479-46005212	483-40060309
476-10110269	477-00144282	478-01345277	479-46006212	483-40062309
476-10115269	477-00404281	478-01346277	479-46010212	483-40091309
476-10120269	477-00409283	478-01350276	479-46011212	483-40132305
476-10125269	477-00506281	478-01351276	481-00010300	483-40301307
476-10130269	477-00516281	478-01352276	481-00072300	483-40401307
476-10135269	477-00577280	478-02975277	481-00075300	483-40800307
476-10140269	477-00587280	478-02985276	481-00206301	483-40801307
476-10145269	477-01006282	478-02995276	481-00212301	483-40806307
476-10150269	477-01009282	478-03238276	482-21374306	483-99409306
476-10155269	477-01012282	478-03300276	482-25411305	484-00006326
476-10160269	477-01025282	478-03301276	482-25491305	484-00012326
476-10165269	477-01111282	478-03330276	482-25649306	484-00060327
476-10185269	477-01112282	478-03370276	482-26447306	484-00112326
476-10240278	477-10001280	478-04500276	482-26448306	484-00300327
476-10250278	477-10004280	478-04501276	482-26460305	484-03200329
476-10255278	477-10312279	478-04660278	482-26462305	484-07500329
476-10480269	477-11111282	478-05265276	482-26463305	484-10100327
476-10500271	477-11235279	478-05451276	482-26464305	484-10101327



484-10102327	484-52001328	491-00399103	491-03099103	492-14000105
484-10200327	484-52312328	491-00426107	491-03101103	492-14916106
484-10201327	484-53215326	491-00600103	491-03103103	492-15000105
484-10300327	484-57026329	491-00654102	491-03113103	492-30165203
484-10301327	484-61215326	491-00708100	491-03271103	492-3025495
484-10400327	484-63215326	491-00709100	491-03279103	492-3064995
484-10720326	484-67026327	491-00716102	491-04009102	493-0080193
484-11360326	484-77026327	491-00729103	491-04012102	493-3010093
484-13360326	486-00011332	491-00881100	491-04013102	493-3012093
484-16001327	486-00044331	491-00888100	491-04020102	493-3012593
484-17026327	486-00133331	491-00889100	491-04021102	493-3121093
484-17127327	486-00144331	491-00891100	491-06012102	494-01010167
484-20576327	486-00222332	491-00892100	491-06014102	494-08907167
484-20624327	486-00233331	491-00896100	491-06020102	494-08916167
484-21576329	486-00880330	491-00897100	491-06021102	495-0638086
484-21624329	486-07129332	491-00978100	491-06023102	495-0638286
484-22576327	486-11002331	491-00993103	491-06024102	495-0638386
484-27026327	486-11004331	491-00995100	491-06025102	495-0638486
484-28408328	486-11005331	491-0113399	491-06026102	495-0638686
484-28418328	486-11006331	491-01304100	491-06115103	495-0638786
484-28428328	486-11011331	491-01306100	491-09013102	495-1600078
484-30224327	486-31280330	491-0133991	491-09014102	495-1600178
484-30360326	486-31281329	491-0150491	491-19010101	495-1600278
484-30836328	486-33580331	491-0157391	491-3212090	495-1600378
484-31230326	486-33581331	491-0159491	491-3212190	495-1600481
484-31231326	486-33584331	491-0182591	491-3212490	495-1600581
484-31233326	486-51480332	491-0186091	492-0050292	495-1600681
484-31234328	486-71510332	491-01896100	492-0124092	495-1600781
484-31252326	486-71511332	491-01897100	492-0125092	495-1600881
484-31360327	486-75001332	491-01978100	492-0126092	495-1600981
484-31430326	486-75002332	491-01995100	492-02278106	495-1601478
484-31432326	491-00014102	491-02100101	492-0420092	495-1601578
484-31500328	491-00016102	491-02101101	492-0424092	495-1601678
484-31501328	491-00027102	491-02111101	492-0430092	495-1601778
484-32230328	491-00033100	491-0230199	492-0440092	495-3030478
484-32252328	491-00038102	491-02431102	492-0502192	495-3030578
484-32360329	491-00052102	491-02445102	492-0502292	495-3030678
484-33252326	491-00055102	491-02620101	492-0502392	495-3030778
484-35320328	491-00056102	491-02622101	492-0502492	495-3030878
484-37026327	491-00062102	491-0266691	492-0502592	495-3030978
484-40848328	491-00064102	491-0290699	492-06247107	495-3031078
484-41215326	491-00065102	491-0291999	492-06346107	495-3031178
484-41226328	491-00066102	491-0292899	492-10134105	495-3031278
484-41230326	491-0010191, 149	491-0293999	492-10150105	495-3031378
484-41232326	491-00123103	491-03001102	492-10151105	495-3032778
484-41500328	491-0013398	491-03002102	492-10158105	495-3032878
484-41501328	491-00149102	491-03004102	492-10159105	495-3032978
484-42010328	491-00233103	491-03005102	492-10180105	495-3033478
484-47026329	491-00235103	491-03083103	492-10196105	495-3033678
484-48312328	491-00238103	491-03087103	492-10340105	495-3033778
484-48322328	491-00257103	491-03096103	492-10580105	495-3033878
484-50615328	491-00304100	491-03097103	492-10590105	495-3033978
484-51215326	491-00306100	491-03098103	492-10780105	495-3034078



495-3034178	501-90008396	517-00100424	526-10052391	531-60170410
495-3034278	501-90018396	517-11033424	526-10056391	531-60300410
495-3034378	501-90032396	518-90030400	526-10060391	531-60310410
495-3089878	501-90132396	518-90060422	526-11115392	531-60570410
495-3089978	502-26001394	518-90130400	526-11116392	531-70030410
495-3090879	502-26005394	518-90160400	526-11117392	531-71050410
495-3090980	502-26011394	523-18101395	526-11118392	531-75150410
495-3091080	502-26015394	523-18126395	526-11119392	531-75170410
495-3091180	502-40541393	523-18146395	526-11120392	531-75190410
495-3091278	502-51388393	523-18160395	526-11121392	531-75200410
495-3091380	504-00005166	523-18161395	526-11122392	531-75220410
495-3091480	504-00055166	523-18206395	526-11123392	531-75310410
495-3091880	504-00275166	523-18212395	526-11124392	531-75330410
495-3091980	504-01248166	523-18220395	526-11125392	531-75370410
495-9735185	504-01832166	523-18222395	526-11126392	531-75440410
495-9735285	504-02424166	523-18262395	526-11127392	531-95001169
495-9735385	504-09600393	523-18389395	526-11128392	531-95002169
495-9735585	504-09601393	523-18412395	526-11129392	532-06020392
495-9736185	504-14100404	523-18512395	526-11130392	532-06021392
495-9736285	504-14104404	523-18712395	526-11131392	533-00003420
497-00005439	504-14111404	523-18758395	526-11132392	533-00010420
497-00055439	504-14228404	523-18856395	526-11133392	533-00012420
497-84405439	504-90005396	523-18858395	526-11134392	533-00045420
497-84406439	504-90011396	523-18860395	526-11135392	533-01120420
499-10130105	504-90016396	523-18912395	526-11136392	533-01140420
499-10150105	504-90032396	523-18914395	526-11137392	533-01141420
499-10171105	505-00071392	523-18915395	526-11138392	533-01180420
499-10180105	505-00170392	523-18960395	526-11139392	533-01181420
499-10200105	505-00171392	525-10136391	526-11140392	533-01182420
499-10210105	505-00176393	525-10137391	526-11141392	533-01381420
499-10211105	505-14100404	525-10138391	526-12046391	533-01516420
499-10340105	505-14102404	525-10139391	526-12050391	533-01716420
499-10341105	505-90032396	525-11345391	526-12052391	533-01732420
499-10580105	506-26005394	525-11346391	526-12056391	534-80001420
499-10581105	506-26015394	525-11347391	526-12060391	534-80005420
499-10660105	507-00063392	525-11348391	526-12146391	534-80011420
499-11171105	515-0055572	525-11349391	526-12150391	534-80015420
500-00096393	515-0240072	525-11350391	526-12152391	534-80024420
500-01602394	516-00305435	525-11351391	526-12156391	534-80036420
501-00201392	516-00405435	525-11352391	526-12160391	534-80037420
501-00202392	516-00491435	525-15116394	526-15283395	534-80057431
501-00203392	516-00492435	525-15181394	526-15293395	534-80115420
501-00204392	516-00493435	525-15186394	526-18001395	534-80136420
501-00205392	516-00494435	525-15188394	526-18002395	534-80137420
501-14008404	516-00495435	525-15213394	526-18003395	534-81115420
501-14032404	516-00496435	525-15216394	526-51618394	535-00150362
501-14511404	516-00505435	525-15286394	526-55610394	535-03811436
501-14512404	516-00605435	525-15288394	526-55630394	535-06020436
501-14513404	516-01305435	525-15413394	526-55672394	535-08014418
501-14514404	516-01405435	525-15418394	531-60070410	535-08034418
501-14515404	516-04914435	525-15914394	531-60090410	535-08044418
501-50300393	517-00039424	526-10046391	531-60130410	535-08075418
501-51300393	517-00055424	526-10050391	531-60150410	535-08085418



535-13533		537-10565413	538-14000414	539-06410407	539-32058409
535-14165		537-15224413	538-15000415	539-06411407	539-32063409
535-14170		537-15225413	538-15100415	539-06412407	539-32064409
535-14171		537-15226413	538-15200415	539-06413407	539-32065409
535-14172		537-15227413	538-15400415	539-06414407	539-33004409
535-14173		537-15230413	538-15600415	539-06415407	539-33009409
535-14174		537-15232413	538-30000415	539-06416407	539-33010409
535-14175		537-17276411	538-30200415	539-06417407	539-33017409
535-14176		537-17277411	538-30400415	539-10001420	539-80002435
535-14177		537-36560413	538-30500415	539-10116408	539-80003435
535-14178		537-75310410	538-30600415	539-10123408	539-80012435
535-14179		537-90002412	538-31000415	539-10136408	539-80013435
535-14182		537-90003412	538-31200415	539-10160408	541-00400388
535-14185		537-90005412	538-31400415	539-10416408	541-00410388
535-21072		537-90006412	538-41223416	539-10423408	541-00420388
535-21073		537-90009412	538-41239416	539-10436408	541-00430388
535-21074		537-90019412	538-42223416	539-10460408	541-00440388
535-21076		537-90035412	538-42239416	539-10916408	541-00450388
535-35070		537-90045412	538-60100415	539-10923408	541-00460388
535-35240		537-90116412	538-60300415	539-10936408	541-00470388
535-35250		537-90119412	538-60500415	539-10960408	541-00472388
535-70179		537-90135412	538-60541401	539-11016408	541-11000402
536-00001		537-90144412	538-61100415	539-11023408	541-11001402
536-00101		537-90150412	538-61300415	539-11036408	541-11002402
536-01121		537-90155412	538-61900416	539-11060408	541-11003402
536-01122		537-90200412	538-62600416	539-11075433	541-11004402
536-02040		537-90201412	538-63500415	539-11076433	541-11005402
536-02890		537-91119412	538-70750416	539-11133433	541-11006402
536-02910		537-95893413	538-70800416	539-11134433	541-11007402
536-06500		538-00018415	538-70850416	539-15516409	541-11008402
537-00001		538-00340416	539-00005433	539-15536409	541-90020398
537-00003		538-10000414	539-00006433	539-15616408	541-90030398
537-00004		538-10013416	539-02203407	539-15636408	541-90040398
537-00027		538-10014416	539-02204407	539-15816408	541-90101398
537-00028		538-10020416	539-02205407	539-15836408	541-90255398
537-00045		538-10021416	539-02206407	539-16316408	541-90610398
537-00190		538-10134416	539-02207407	539-16336408	550-26707389
537-00199		538-10135416	539-02208407	539-16416408	550-26714389
537-00353		538-10200414	539-02209407	539-16436408	550-26721389
537-00575		538-10700414	539-02210407	539-16516408	550-26738389
537-00585		538-10900414	539-02241407	539-16536408	550-26745389
537-02240		538-11100414	539-06260407	539-18416409	550-26752389
537-02241		538-11200414	539-06261407	539-18436409	550-90000398
537-06010		538-11400414	539-06310407	539-18516409	550-90001398
537-06012		538-11600414	539-06311407	539-18536409	550-90002398
537-06014		538-11800414	539-06312407	539-18616409	550-90004398
537-06022		538-12000414	539-06313407	539-18636409	550-90005398
537-10010		538-12200414	539-06314407	539-18716409	550-90006398
537-10011		538-12900416	539-06315407	539-18736409	550-90007398
537-10012		538-12900436	539-06316407	539-18816409	550-90008398
537-10013		538-13000415	539-06317407	539-18836409	550-90009398
537-10017		538-13017414	539-06360407	539-28646409	550-90011398
537-10021	412	538-13023414	539-06361407	539-32056409	550-90012398




550-90014	398	567-05620	390	576-00120	386	581-67045	389	601-00101	370
550-90015		567-05820		576-00122	386	581-67050		602-08028	427
550-90017		567-05821	390	576-00124		581-67308		602-60210	424
550-90018	398	568-05000		576-00125		581-67340		602-60211	
550-90019	398	568-05010	390	576-00128	386	581-68008	389	603-00275	426
550-90031		568-05200		576-00135		581-68020		603-00825	
550-90114	398	568-05210	390	576-00140	386	581-68406	389	604-01275	426
550-90200	398	568-05400		576-00142		581-68418	389	604-05045	425
550-90550	398	568-05410	390	576-00144		582-19311	388	604-05120	
550-91000		568-05600		576-00531	387	582-19410		604-05500	425
550-91100	398	568-05610	390	576-00533		582-19420	388	605-00101	427
550-92100		568-05800		576-00535		582-19430		605-14191	
561-11488		568-05810		576-00537		582-19621		605-31554	
561-11489		569-00090		576-00539		582-19820		606-57000	
561-11490		569-00091		576-00581		583-13670		606-57001	
561-11491		571-00010	386	576-00583		583-13672		613-00414	
561-11492		571-00011		576-00585	387	583-13673		613-00418	
561-11493		571-11115		576-00587		583-13674		613-00436	
561-11494	403	571-11116		576-00589		583-23672		613-00438	430
561-11495		571-11307	402	576-90010	399	583-23673	404	613-00465	436
561-11496		571-11309		576-90012		583-23674		613-00466	
561-11497		571-11311	402	576-90014	399	583-23675		613-00467	436
561-11498		571-11312	402	576-90020	399	585-10071		613-00470	
561-11499	403	571-11313		576-90040		585-30581	401	613-00512	436
562-26006		571-11321		576-90110	399	585-30820	401	613-00514	430
562-26037		571-11322		576-90111	399	585-60410	401	613-00518	430
562-26044		571-11323		576-90112		587-01150		613-00538	
562-26051		571-11324		576-90114		587-01151		613-00614	
562-26068		571-11325		576-90120		587-01152		613-00618	
562-26075		571-11808		576-90140		587-01303		613-00638	
562-26082		571-11810		576-90142		587-01306		613-00660	
562-26099		571-11812		577-00146		587-01309		613-00674	
562-26109		571-11814		577-00150		587-01406		613-00699	
562-26212		571-11820		577-00152		587-01409		613-00705	
562-26213		571-11822		577-00155		587-13381		613-00839	
562-26314		571-11824		577-00156		587-13382		613-00846	
562-26315		571-11825		577-00160		587-13386		613-00937	
563-00200		571-11835		577-00162		587-33810		613-00938	
563-00210		571-11840		577-00165		587-33811		613-01332	
563-00220		571-11842		577-00168		587-90003		613-01653	
563-00230		571-11844		577-00175		587-90016		613-01715	
563-00240		571-11845		577-00180		587-90018		613-01955	
563-00250		571-22926		577-00182		587-90033		613-02092	
563-00400		571-22928		577-00184		587-90066		613-02184	
563-00410		571-22960		577-00185		587-90088		613-02516	
563-00420		571-90410		577-00186		587-90099		613-02533	
564-90012		571-90705		577-00188		587-90110		613-02701	
564-90013		571-91964		577-00190		593-90001		613-02702	
564-90014		571-91968		581-13620		593-90002		613-02821	
564-90015		571-92100		581-13621		593-90003		613-04316	
564-90016		575-00110		581-13622		593-90004		613-04516	
564-90022		575-00115		581-13623		593-90011		613-04532	
564-90111	599	575-00116	586	581-67010	389	593-90022	599	613-06316	430



613-06516430	613-91502433	634-00315437	643-40032440
613-06532430	613-91503433	634-00515437	643-40033440
613-09111436	616-00111430	634-00812437	643-40034440
613-11206432	616-00222430	634-00815437	643-40035440
613-11383432	616-00320430	634-00820437	643-40036440
613-11384432	616-00325430	634-05586437	643-40037440
613-11385432	616-00333430	634-05587437	643-40038440
613-11391432	616-00416430	634-12027436	644-12345436
613-11955436	616-00420430	634-14027436	645-00011434
613-12900431	616-00425430	634-15027436	645-00017434
613-19111436	616-00944431	634-18027436	645-00117434
613-23800436	616-01155431	639-02338434	645-00321434
613-25718436	616-01156431	639-05010434	645-00812434
613-25839436	616-01420431	639-05012434	645-00814434
613-28081436	616-11116431	639-08008434	645-00874434
613-28160436	616-11173431		645-01000434
613-28260436		639-10800434	645-01604434
613-28271436	616-11275431	639-11081433	
613-28313436	616-11365432	639-11139433	645-01812437
	616-11400431	639-42308433	645-01815437
613-29617436	616-11520430	639-42312433	645-02014434
613-29618436	616-11521431	639-50184433	645-02110434
613-32769436	616-11525430	639-50806433	645-03000434
613-32773436	616-11603433	643-40001440	645-08476434
613-32774436	616-11604433	643-40002440	645-16171434
613-32778436	616-11605433	643-40003440	645-21192434
613-32822436	616-11606433	643-40004440	647-00032439
613-32826436	616-11610433	643-40005440	647-05611439
613-33007436	616-11612433	643-40006440	647-05612439
613-33092436	616-16101433	643-40007440	647-05613439
613-33093436	616-16102433	643-40008440	647-24501438
613-33094436	616-16121433	643-40009440	647-24505438
613-33162436	616-16122433	643-40010440	649-40100440
613-33379436	616-21525431	643-40011440	649-83340440
613-33382436	616-43912431	643-40012440	651-32437435
613-33564436	616-43914431	643-40013440	651-35462435
613-33568436	616-43920431	643-40014440	651-63415435
613-33717436	616-43921431	643-40015440	653-40082435
613-39020436	616-43928431	643-40016440	703-00509367
613-43924431	616-43940431	643-40017440	703-00810367
613-43934431	616-82013433	643-40018440	703-00818367
613-43935431	616-82014433	643-40019440	703-47147367
613-43936431	632-00005164, 438	643-40020440	719-00018428
613-43937431	632-00010164, 438	643-40021440	719-00032428
613-43938431	632-00922164	643-40022440	719-12001428
613-43939431	632-00923164	643-40023440	719-12011428
613-43940431	632-01002164, 438	643-40024440	736-10004422
613-43941431	632-02400164, 438	643-40025440	751-00060366
613-43943431	632-10001164, 438	643-40026440	751-00072366
613-53165430	633-50105438	643-40027440	751-00080366
613-91207433	633-50154438	643-40028440	751-00172366
613-91321433	633-83005438	643-40029440	77-11624283
613-91322433	633-83015438	643-40030440	844-16259294
613-91501433	634-00115437	643-40031440	844-16572294



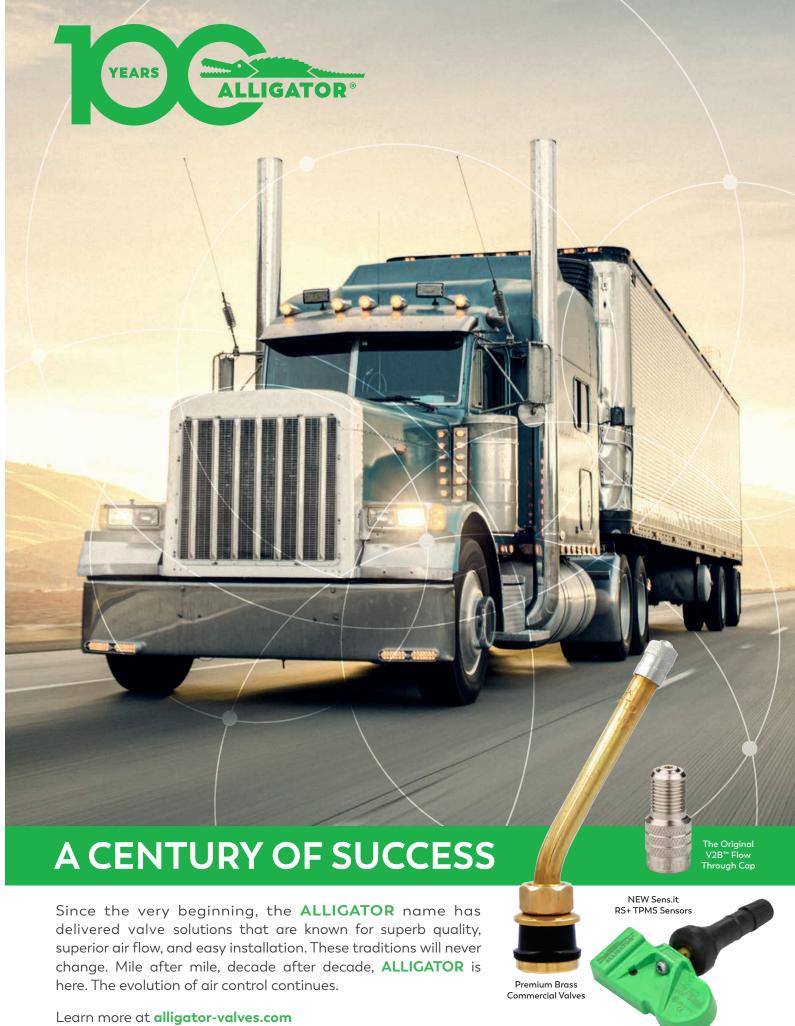



PASSENGER • LIGHT TRUCK • HD TRUCK • OTR • MINING